

SAMSUNG

DVM S
Digital Variable Multi Smart
VRF SPECIFIERS' DESIGN GUIDE

Samsung is moving with, and ahead of, our customers

"Put simply, our differentiation is centered on producing innovative technology that brings genuine change to people's lives. We do this by bringing a relentless focus on consumer experience and product innovation to everything we do." SUE SHIM CMO (CHIEF MARKETING OFFICER), SAMSUNG.



Why Samsung?

As one of the world's largest technology companies, Samsung are delivering a complete and connected set of products and solutions for commercial properties and enterprises. Samsung will work with you to provide your customers with leading edge 'total building' propositions utilising the latest innovative technologies.

- Hotel TV solutions
- Professional displays
- Smart signage
- Security systems
- Mobile devices and apps
- Printing solutions
- Telephone systems
- Wireless networks
- Air conditioning





Introduction

Samsung have been manufacturing air conditioning systems for almost 40 years, utilising the latest technology and striving to produce the most innovative, efficient and reliable systems on the market today.

The 5th generation Samsung VRF systems deliver leading efficiencies, long pipe runs and smart controls to provide air conditioning solutions for a variety of commercial applications.

This guide has been produced to assist in the selection of the most suitable equipment for today's commercial projects, from Samsung's comprehensive portfolio of 2 and 3-pipe air and water cooled systems, extensive range of indoor unit designs and variety of control options.

Samsung air conditioning has already been specified and installed in a wide range of UK properties and applications in conjunction with other products from the Samsung Electronics product portfolio, including hotel TVs, display screens, CCTV, security systems, wireless networks, mobile devices and Smart Home (internet of things).

Nomenclature

Outdoor units

AM	080	F	X	V	A	G	H
1	2	3	4	5	6	7	8

1	Classification	AM	DVM
2	Capacity	x 1/10 HP (3 digits)	
3	Version	F	2013
		H/J	2015
4	Product Type	X	Outdoor Unit
5	Product Notation	V	DVM S
		M	DVM S Eco
		W	DVM S Water
6	Product Type	A	Stsndard
		H	High Efficiency
7	Rating Voltage	E	1Ø, 220~240V, 50Hz
		G/N	3Ø, 380~415V, 50Hz
8	Mode	H	Heat Pump
		R	Heat Recovery

Indoor units

AM	045	F	N	4	D	E
1	2	3	4	5		6

1	Classification	AM	DVM
2	Capacity	x 1/10 HP (3 digits)	
3	Version	F	2013
		G/H	2014
		J	2015
4	Product Type	N	Indoor Unit
5	Product Notation	"1"	1 way cassette
		"2"	2 way cassette
		4	4 way cassette
		N	Mini 4 way cassette
		L	LSP Duct (Slim Duct)
		M	MSP Duct
		H	HSP Duct
		C	Ceiling
		J	Console
		F	Floor Standing
		Q	Neo Forte (EEV)
		V	Wall A3050 (EEV)
		B	Hydro Unit
		K	ERV
6	Rating Voltage	K	1Ø, 220~240V, 50Hz
		G/N	3Ø, 380~415V, 50Hz

Contents

P 06
Why Samsung is leading the way

P 08
Outdoor Units Line-up

P 10
Indoor Units Line-up
Controls Line-up

P 12 Indoor Units

1Way Cassette 12
2Way Cassette 14
4Way Cassette 16
Optional Accessories 19
Mini 4Way Cassette 20
360 Cassette 22
Slim Duct 24
MSP Duct S 28
Air Handling Unit (AHU) Kit 33
HSP Duct 34
Console 36
Ceiling 38
Wall (Neo-Forte E) 40
Wall (A3050-E) 42
Floor 44
Hydro Unit 46
Mode Control Unit (MCU) 48

P 50 Outdoor Units

Outdoor Units Line-up 50
DVM S Heat Recovery High Efficiency 52
DVM S Heat Pump High Efficiency 56
DVM S Heat Pump Standard 60
DVM S Water 62
DVM S Eco 66
Piping Diagrams 70
Wiring Diagram 73


P 74 Controls

Controls Line-up 74
Individual Control 75
Centralised Control 76
Building Management 77
Power Monitoring 80
Gateways 81
Web Server 82
External Contact Interface 82

Why Samsung is leading the way

Class Leading Efficiencies (ESEER 8.00)

The 3rd generation VRF system adopts a dual inverter compressor that upgrades refrigerant flow and the motor's operating performance. The new flash injection technology provides high heating performance at low temperatures achieving weather dependent efficiencies of up to 4.88 (EER) and 5.49 (COP).

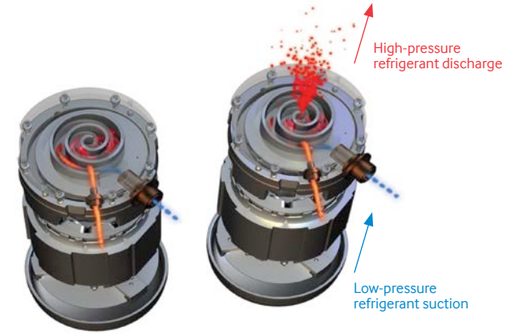


Flash Injection Technology

26HP Single Outdoor Unit

Available as Heat Pump 2pipe, the single outdoor unit provides 72.8kW cooling from a footprint of just 0.99m^2. A 22HP Heat Recovery unit is also available providing 61.6kW cooling.

Piping Separation 200m


The 200m piping separation between outdoor and indoor units, the height difference of 110m, and first branch to furthest indoor unit distance of up to 90m all lead the industry. (Please refer to the piping diagrams on page 70)

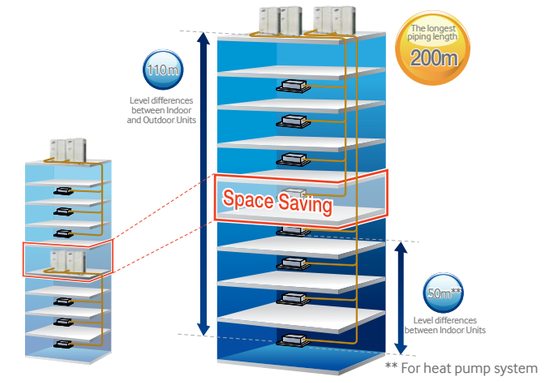

Indoor Discharge Temperature Control


Without changing the outdoor unit's setting, each ducted indoor unit or AHU kit has a discharge air temperature control function, offering greater comfort in cooling or heating mode.

This is set by each MWR-WE10N remote control in a detailed setting mode and is only applicable to ALL ducted/AHU connected systems.



Programmable Mini BMS

The DMS 2 web server incorporates programmable logic and ability to connect and control third-party equipment via 8 inputs and 6 outputs – providing a mini-BMS capability, plus Power Monitoring function, via associated interface.

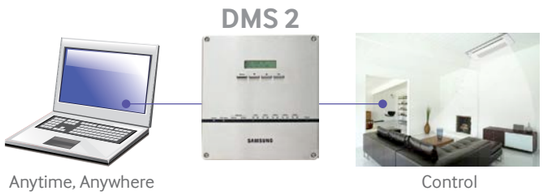

Smart Management

Samsung provides an easy to use, smart management system that makes life simpler. With this web-based system, you can immediately access data and easily manage it for unsurpassed convenience.

Auto Commissioning and Management (ACM)

DVM S has a smart management system that facilitates self-diagnosis, auto commissioning, auto management, and mobile data transmission. Since you can control the system with smart phone or tablet PC, it provides easy and convenient management.




Reduced Commissioning Time

Thanks to ACM, the commissioning time for DVM S has shortened considerably from 180 minutes to 50 minutes, and the testing results are automatically stored and reported




Wi-Fi Monitoring System

With S-Checker, DVM S can be monitored by smart devices such as smart phone or tablet PC.

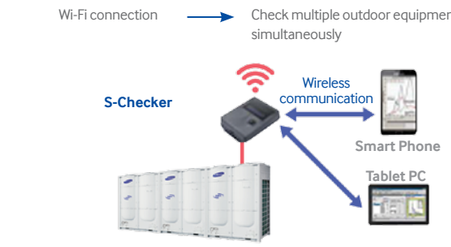

DVM S

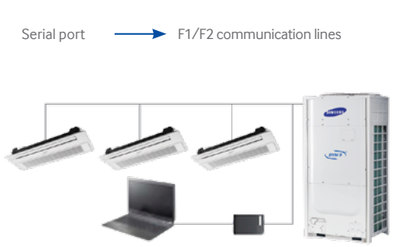

Conventional

Outdoor Units Line-up

Outdoor Units

DVM S 52. Heat Recovery 56. Heat Pump 60. Heat Pump Std 2-pipe Heat Pump (HP) or 3-pipe Heat Recovery (HR)	Model	Capacity		Single								Module					Module																	Single									Module							
			HP	8	10	12	14	16	18	20	22	24	26	28	30	32	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80										
			Cooling	22.4kW	28.0kW	33.6kW	40.0kW	45.0kW	50.4kW	56.0kW	61.6kW	67.2kW	73.6kW	78.6kW	84.0kW	89.6kW	95.2kW	101.6kW	106.6kW	112.0kW	117.6kW	123.2kW	128.8kW	135.2kW	140.2kW	145.6kW	151.2kW	156.8kW	163.2kW	168.2kW	173.6kW	179.2kW	184.8kW	190.4kW	196.8kW	201.8kW	207.2kW	212.8kW	218.4kW	224.8kW										
			Max. kW Capacity	29.12	36.4	43.7	52.0	58.5	65.52	72.8	80.08	87.4	95.7	102.2	109.2	116.5	123.8	132.1	138.6	145.6	152.9	160.2	167.4	175.8	182.3	189.3	196.6	203.8	212.3	218.7	225.7	233	240.2	247.5	255.8	262.3	269.4	276.6	283.9	292.2										
			Max. no. Indoors	14	18	21	26	29	32	36	40	43	47	51	54	58	61	66	69	72	76	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80										
Outdoor Units		AM080JXVHGH	8 HP	1																																												
		AM100JXVHGH	10 HP		1																																												
		AM120JXVHGH	12 HP			1						2	1	1	1	1	1						2	1	1	1	1	1						2	1	1	1	1	1								
		AM140JXVHGH	14 HP				1						1					1						1					1						1					1								
		AM160JXVHGH	16 HP					1						1					1						1					1						1												
		AM180JXVHGH	18 HP						1						1											1											1											
		AM200JXVHGH	20 HP							1						1				2	1						1				2	1						1										
		AM220JXVHGH	22 HP								1						1	1	1		1	2	1	1	1	1	1	2	2	2	1	2	3	2	2	2	2	2	3	3								
		AM240HXVHAGH	24 HP									1																																				
		AM260HXVHAGH	26 HP										1																																				


*Please check Eurovent website to confirm exact model certification.

Outdoor Units	62. DVM S Water	Phase		Capacity			
			HP	8	10	12	20
			Cooling	22.4kW	22.0kW	33.6kW	56.0kW
			Max. kW Capacity	29.12	36.4	43.7	72.8
			Max. no. Indoors	14	18	21	36
		3 Phase		AM080FXWANR	AM100FXWANR	AM120FXWANR	
		3 Phase					AM200FXWANR

Outdoor Units	66. DVM S Eco	Phase		Capacity			
			HP	4	5	6	8
			Cooling	11.2kW	14.0kW	15.5kW	22.4kW
			Max. kW Capacity	14.5	18.2	20.2	29.12
			Max. no. Indoors	6	8	9	17
		1 Phase		AM040FMXDEH	AM050FMXDEH	AM060FMXDEH	
		3 Phase		AM040FMXDGH	AM050FMXDGH	AM060FMXDGH	AM080FMXDGH

These products contain fluorinated greenhouse gas (R410A).

Selection steps

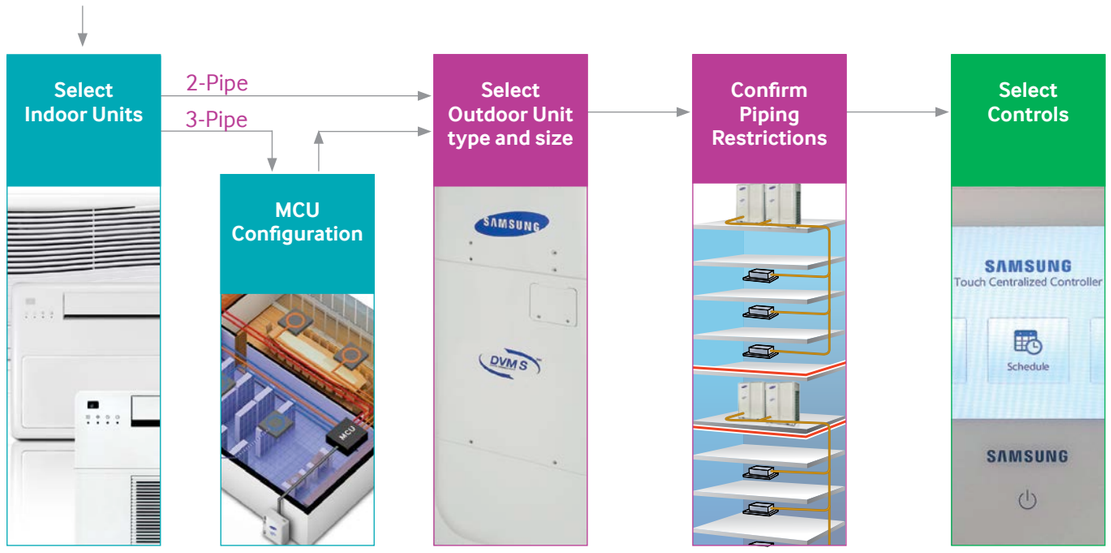

Indoor Units and Controls Line-up

Indoor Units

Type		Capacity									Capacity										
		1.5/1.7kW	2.2kW	2.8kW	3.6kW	4.5kW	5.6kW	6.0kW	7.1kW		8.2kW	9.0kW	11.2kW	12.8kW	14.0kW	16.0kW	18.0kW	22.0kW	25.0kW	28.0kW	31.5kW	50.4kW
12. 1Way Cassette		•	•	•	•		•		•													
14. 2Way Cassette							•		•													
16. 4Way Cassette						•	•		•			•	•	•	•							
20. Mini 4Way Cassette		•	•	•	•	•	•	•														
22. 360°						•	•		•			•	•	•	•							
24. Slim Duct		•	•	•	•	•	•		•			•	•	•	•							
24. MSP Duct S			•	•	•	•	•		•			•	•	•	•							
34. HSP Duct													•	•	•		•	•		•		
36. Console			•	•	•	•	•															
38. Ceiling							•		•				•		•							
40. Wall (Neo Forte-E)		•	•	•	•	•	•		•													
42. Wall (A3050-E)		•	•	•	•	•	•		•		•											
44. Floor Uncased					•		•		•													
46. Hydro Unit HE 1 Phase (Heating)																•					•	•
46. Hydro Unit HT 1 Phase + 3 Phase (Heating)																•			•			

Type		Details		Details		
		Model		Model	Description	Relevant Unit
OAP (Outdoor Air Processer)		AM140JNEPEH		MXD-K025AN	7.0kW~8.75kW	2.5HP to 40HP with Discharge Air Temperature Control
		AM220JNEPEH		MXD-K050AN	14.0kW~17.5kW	
		AM280JNEPEH				

These products contain fluorinated greenhouse gas (R410A) – HT Hydro Unit (R134a).

Controls

Individual Control							Centralised Control	Building Management System				Power Monitoring		Interface Module	Converter	
																
Wireless Remote Controller	Wired Controller	Simplified Remote Controller		Wireless Signal Receiver	External Remote Temp. Sensor	Wi-Fi Controller	Centralised Controller	DMS 2	S-NET 3	Lonworks G/W	BACnet G/W	Electricity Meter	Power Monitoring	External Contact Module	NASA Converter	S-Net Converter
MR-EH00	MWR-WE10N	MWR-SH00N	MWR-SH10N	MRK-A10N	MRW-TA	MIM-H03N	MCM-A300N	MIM-D00AN	MST-P3P	MIM-B18	MIM-B17	MIM-B16N	MCM-C210N	MIM-B14	MIM-N01	MIM-C02N

1Way Cassette Specifications




Wide Blade | NO! Dust | High Lift-UP

Model Name				AM017HN1DEH	AM022HN1DEH	AM022FN1DEH	AM028FN1DEH	AM036FN1DEH	AM056JN1DEH	AM071JN1DEH
Perfomance	Capacity (Nominal)	Cooling	kW	1.70	2.20		2.80	3.60	5,6	7,1
		Heating		1.90	2.50		3.20	4.00	6,3	8
Fan	Air Flow Rate	H/M/L (UL)	CMM	4.80/4.30/4.10	5.10/4.60/4.30	6.00/5.00/4.00	7.00/6.00/5.00	8.00/7.00/6.00	16.0/14.0/12.5	17.0/15.5/14.0
			l/s	80/71/68	85/76/71	100/83/66	116/100/83	133/116/100	267/233/208	283/258/233
Piping Connections	Liquid Pipe		Ø, inch	1/4						3/8
	Gas Pipe			1/2						5/8
Fuse Rating				5A						
Sound	Pressure	High/Mid/Low	dB(A)	27.0|24.0|21.0	27.0|25.0|23.0		29.0|27.0|24.0	35.0|31.0|27.0	36.0/33.0/31.0	39.0/37.0/34.0
	Power	Cooling		46.0	48.0	51.0	53.0	58.0	58.0	60.0
Dimensions	Net Weight		kg	8.00		10.50	10.50		14,5	14,5
	Net Dimensions (WxHxD)		mm	740 x 135 x 360		970 x 135 x 410			1200 x 138 x 450	1200 x 138 x 450
Panel Size	Panel Model		-	PC1MWSKAN		PC1NUSMAN			PC1BWSMAN	PC1BWSMAN
	Panel Net Weight		kg	2.60		3.00			6,3	
	Net Dimensions (WxHxD)		mm	900 x 25 x 420		1,180 x 25 x 460			1410 x 23 x 500	
Additional Accessories	Drain Pump	Drain Pump	-/Model	Built-in						–
		Max. Lifting Height / Displacement	mm/litre/h	750/24						
	Air Filter		-	Long life filter						
	Panel Option			-		PC1NUPMAN			PC1BWSMAN	PC1BWSMAN

These products contain fluorinated greenhouse gas (R410A).

Slim Design

Our slim 1Way Cassette indoor unit is only 135mm thick. It can easily be installed onto ceilings with a minimum amount of space.

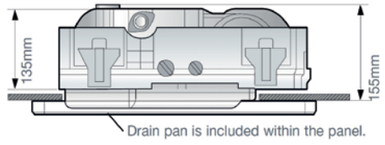

Stylish Panel Options

Three stylish panel options are available (depending upon model size) to match the installation environment.

Wave panel for H1NDEH models.




*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.


1Way Cassette Dimensional Drawings | AM017/022HN1DEH, AM022/028/036FN1DEH, AM056/071JN1DEH

Units: mm

Models	AM017/022HN1DEH
No.	Name
1	Refrigerant gas pipe
2	Refrigerant liquid pipe
3	Drain pipe
4	Power supply wiring conduit
5	Communication wiring conduit
6	Air inlet grille
7	Air outlet louver

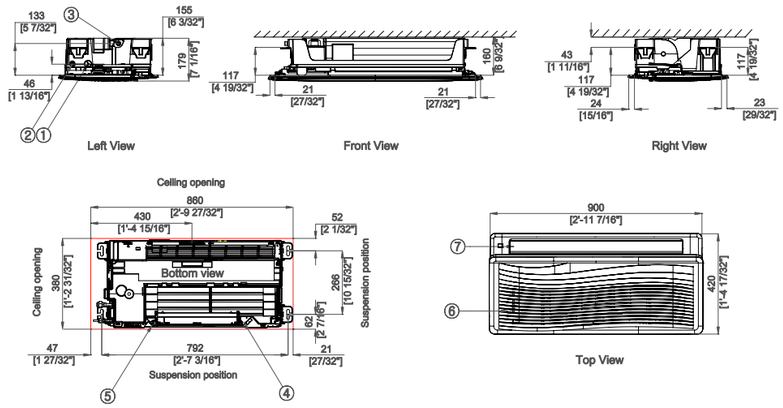

Models	AM022/028/036FN1DEH
No.	Name
1	Refrigerant gas pipe
2	Refrigerant liquid pipe
3	Condensate drain
4	Power and communication wiring conduits
5	Air discharge louver
6	Air suction grille

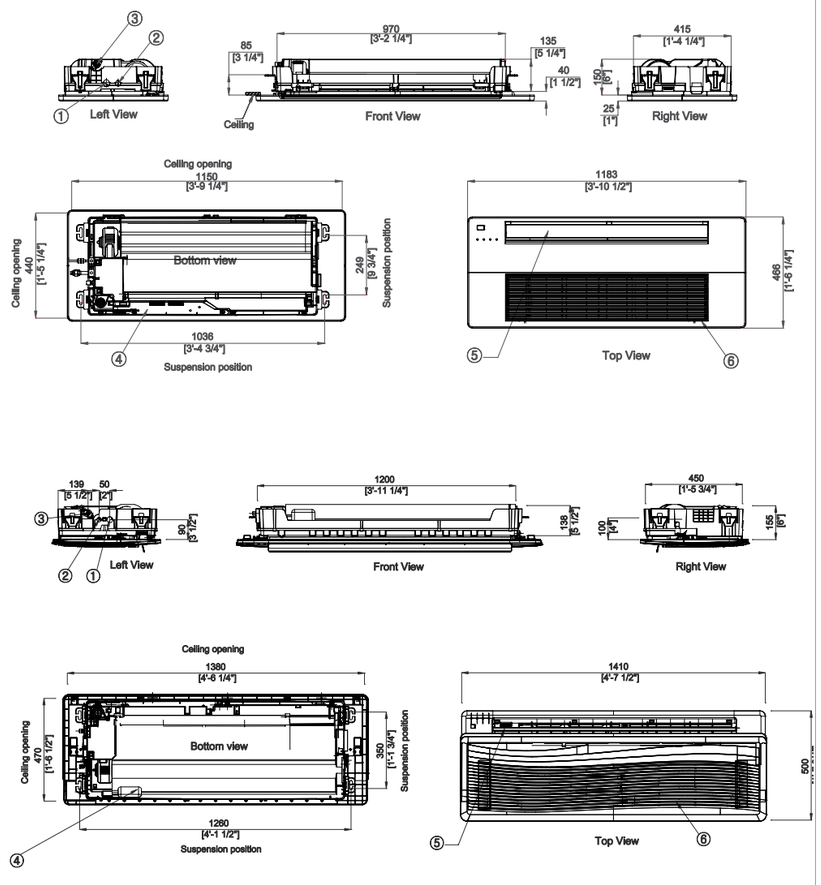

Models	AM056/071JN1DEH
No.	Name
1	Refrigerant gas pipe
2	Refrigerant liquid pipe
3	Condensate drain
4	Power and communication wiring conduits
5	Air discharge louver
6	Air suction grille

2Way Cassette Specifications




High Lift-UP

Model Name				AM056FN2DEH	AM071FN2DEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	5.6	7.1
		Heating*3)		6.3	8.0
Fan	Air Flow Rate	H/M/L (UL)	CMM	14/13/12	15/14/13
			l/s	233/216/200.	250/233/216
Piping Connections	Liquid Pipe		Ø, inch	1/4	3/8
	Gas Pipe			1/2	5/8
Fuse Rating				5A	
Sound	Sound Pressure	High/Mid/Low*4)	dBA	38/37/35	41/39/37
Dimensions	Net Weight		kg	21.00	22.00
	Net Dimensions (WxHxD)		mm	890 x 230 x 575	
Panel Size	Panel Model		-	PC2NUSMEN	
	Panel Net Weight		kg	4.00	
	Net Dimensions (WxHxD)		mm	1030 x 25 x 650	
Additional Accessories	Drain Pump	Drain Pump	-/Model	Built-in	
		Max. Lifting Height / Displacement	mm/litre/h	750/24	
	Air Filter		-	Long life filter	

These products contain fluorinated greenhouse gas (R410A).


Standard formula for Easy Installation

The dimensions of 2Way Cassette air conditioner allow for easy installation into standard ceiling grids (600Wx600D) in such a way that everything just falls into place.

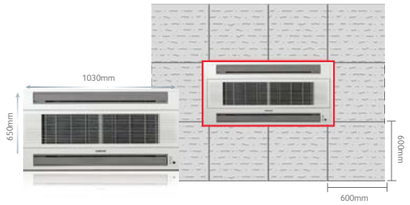

Twin Cross Flow Fan


2Way Cassette type unit is a perfect fit for long and narrow rectangular spaces. The Twin Cross Flow Fan inside 2Way Cassette will spread cool or warm air even further and wider with less noise.

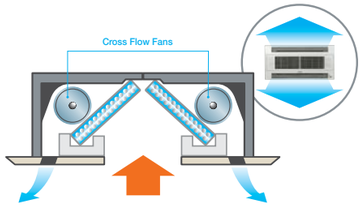

*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

2Way Cassette Dimensional Drawing

Units: mm

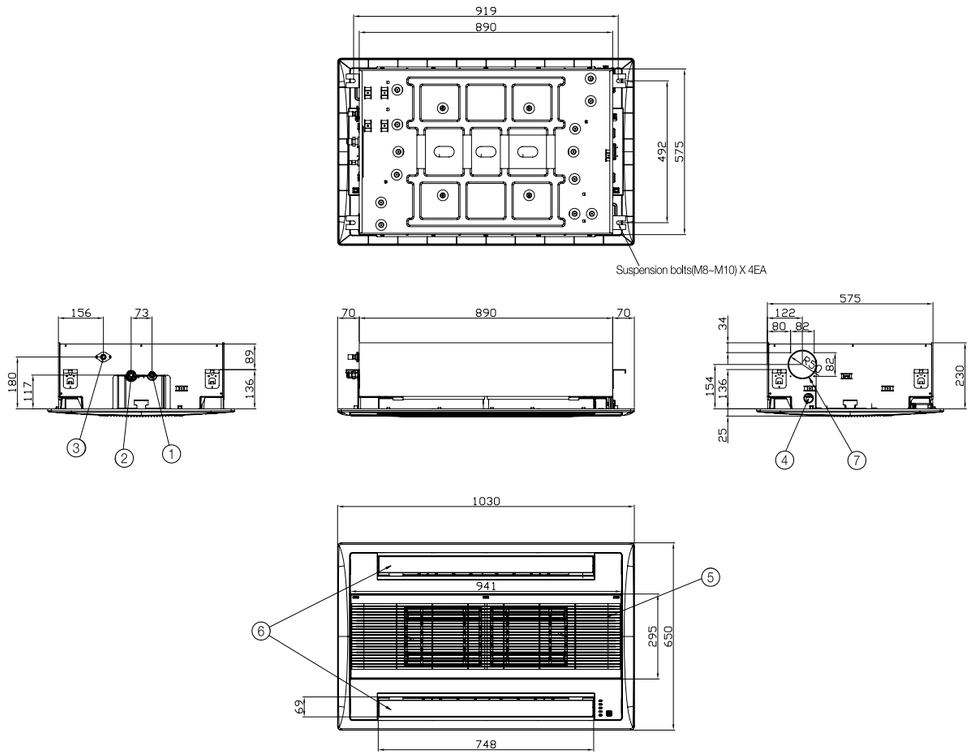

No.	Name	Description	
		5.6kW	7.1kW
1	Liquid pipe connection	Ø6.35 Flare	Ø9.52 Flare
2	Gas pipe connection	Ø12.70 Flare	Ø15.88 Flare
3	Drain pipe connection	VP25 (OD 32, ID 25)	
4	Conduit for power supply and communication wiring	-	
5	Air inlet grille	-	
6	Air outlet louver	-	
7	Fresh air intake	-	

4Way Cassette Specifications



Wide Blade | NO! Dust | High Lift-UP | Fresh Air | Sub Duct

Model Name				AM045FN4DEH	AM056FN4DEH	AM071FN4DEH		AM090FN4DEH	AM112FN4DEH	AM128FN4DEH	AM140FN4DEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	4.5	5.6	7.1		9.0	11.2	12.8	14.0
		Heating*3)		5.0	6.3	8.0		10.0	12.5	13.8	16.0
Fan	Air Flow Rate	H/M/L (UL)	CMM	14.50/13.50/12.50	15.00/14.00/13.00	17.00/15.50/14.50		19.50/18.00/16.50	26.00/24.00/22.00	28.00/26.00/23.00	30.00/28.00/26.00
			l/s	241/225/208	250/233/216	283/258/241		325/300/275	433/400/366	466/433/383	500/466/433
Piping Connections	Liquid Pipe		Ø, mm	6.35		9.52		9.52			
			Ø, inch	1/4		3/8		3/8			
	Gas Pipe		Ø, mm	12.70		15.88		15.88			
			Ø, inch	1/2		5/8		5/8			
Field Wiring	Power Source Wire	Below 20m/ over 20m	mm^2	1.5/2.5				1.5/2.5			
Fuse Rating				5A				5A			
Sound	Sound Pressure	High/Mid/Low*4)	dBA	34/33/31		36/35/34		40/37/34	41/39/37	42/40/37	44/42/39
Dimensions	Net Weight		kg	15.50				15.50	17.00	15.50	19.00
	Net Dimensions (WxHxD)		mm	840 x 204 x 840				840 x 204 x 840	840 x 246 x 840	840 x 288 x 840	
Panel Size	Panel Model		-	PC4NUSKEN				PC4NUSKEN			
	Panel Net Weight		kg	6.70				6.70			
	Net Dimensions (WxHxD)		mm	950 x 30 x 950				950 x 30 x 950			
Additional Accessories	Drain Pump		-/Model	Built-in				Built-in			
	Drain Pump	Max. Lifting Height / Displacement	mm/litre/h	750/24				750/24			
	Air Filter		-	Long life filter				Long life filter			
	Panel Options		Waffle	PC4NUSKAN				PC4NUSKAN			
			Black	PC4NBSKAN				PC4NBSKAN			
	Virus Doctor			MSD-CAN1				MSD-CAN1			

These products contain fluorinated greenhouse gas (R410A).

Stylish and Aesthetic Panel

4Way Cassette S supports two different pattern designs of panels. You can select between the Waffle and Classic pattern, depending on your interior's look or personal preference.

Waffle Pattern




Classic Pattern




Individual Blade Control

By using a remote controller, the opening angles of the 4 blades can be individually set at the same or different angles within a 32°~65° range for more efficient cooling.



No Overflowing Drain Water


The check valve on the drain pump prevents drained water from flowing backward into the drain pan. This minimises the drain pan's water level so that you will never have to worry about water stagnation or overflowing drain water that could drip into your interior.





Surround Air Flow

The 4-way outlet can cool every portion of your interior. The new and practical design of the blades minimises blind spots at the corners of the panel, and can almost cover a full 360° around the indoor unit.

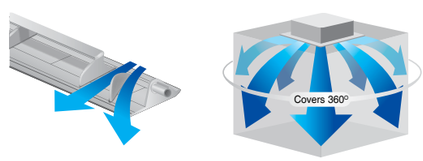


*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

VRF INDOOR UNITS

4Way Cassette Dimensional Drawing

Units: mm

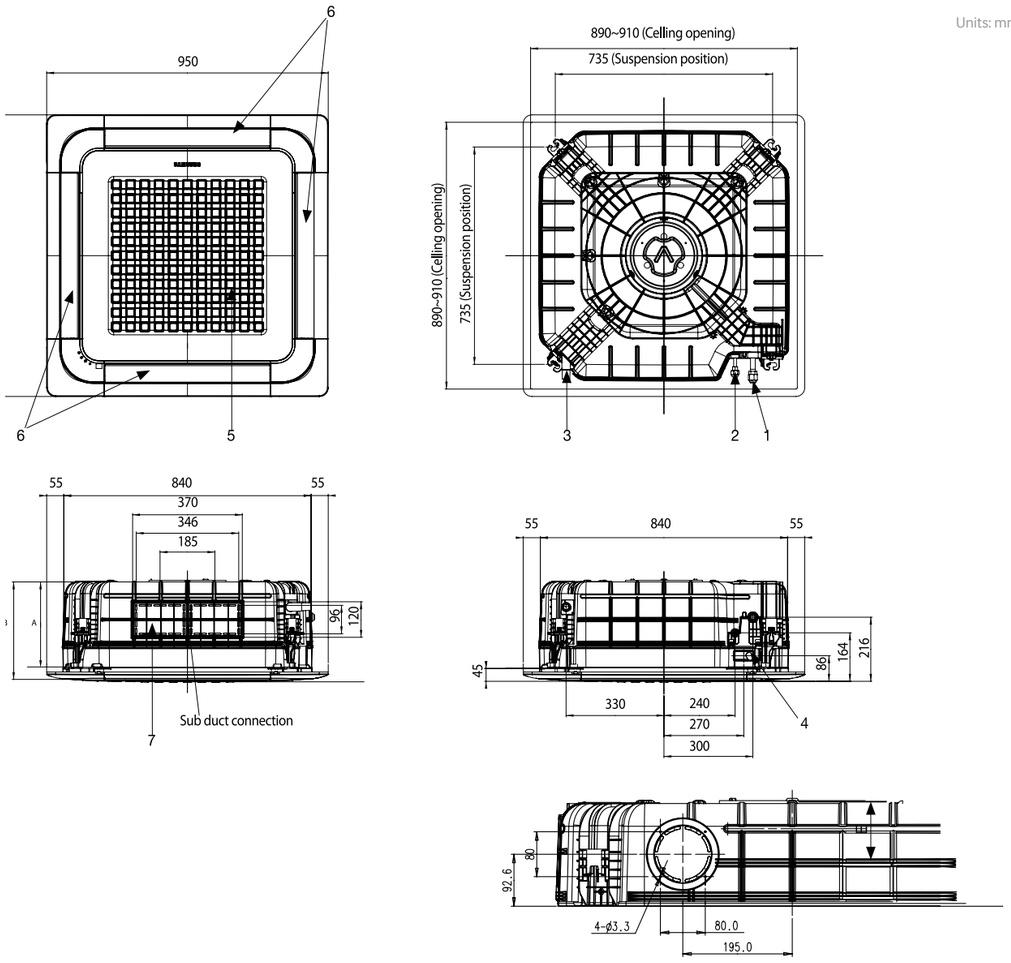

No.	Name	Description			
		4.5/5.6kW	7.1/9.0kW	11.2kW	12.8/14.0kW
1	Liquid pipe connection	Ø6.35 Flare	Ø9.52 Flare		
2	Gas pipe connection	Ø12.70 Flare	Ø15.88 Flare		
3	Drain pipe connection	VP25 (OD 32, ID 25)			
4	Conduit for power supply and communication wiring	-			
5	Air inlet grille	-			
6	Air outlet louver	-			
7	Sub-duct	-			

		Description			
		4.5/5.6kW	7.1/9.0kW	11.2kW	12.8/14.0kW
A	mm	204		246	288
B	mm	253		295	337

Optional Accessories

Virus Doctor: Healthy Air Provider

Our Virus Doctor device eliminates airborne contaminants and creates even healthier air for your environments. This optional device can be easily installed by simply inserting the Virus Doctor kit into the indoor unit.

The Virus Doctor device generates active hydrogen and oxygen ions which eliminate biological contaminants and active oxygen (OH-radical) in the air by turning them into harmless H_2O.


Virus doctor is standard on Console and A3050 wall units.


Virus Doctor is optional on 4Way Cassette, Duct S, 11.2kW and 14kW Ceiling and ERV+ units.

- Elimination of airborne virus and bacteria (subtype H1N1)
- Complete eradiction of bacteria
- Relief of allergies by eradicating airborne allergens
- Neutralisation of OH-radical (as known as active oxygen)



Virus and Active Hydrogen turns into harmless H_2O

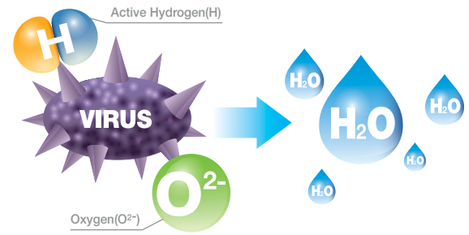

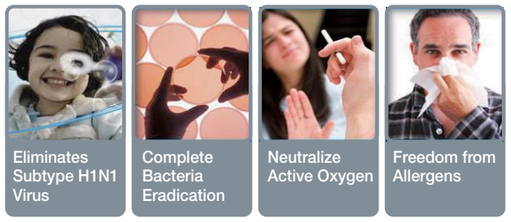

MDS – Motion Detect Sensor (Mini 4Way)

The world's first MDS for Mini 4Way Cassette(s) creates the ideal environment, saving energy by providing the optimised amount of airflow when needed.

Energy Saving On/Off Function

MDS detects when the user is absent, automatically stopping the air conditioning operation. It also automatically sets operation patterns to maximise energy efficiency.

Pleasant and Comfortable Air

MDS enables the indoor unit to avoid directly providing airflow to people and reduces the difference of thermal sensation in the body by detecting the temperature around floor.



Mini 4Way Cassette Specifications






Model Name				AM015HNNDEH	AM022FNNDEH	AM028FNNDEH	AM036FNNDEH	AM045FNNDEH	AM056FNNDEH	AM060FNNDEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	1.50	2.20	2.80	3.60	4.50	5.60	6.00
		Heating*3)		1.70	2.50	3.20	4.00	5.00	6.30	6.80
Fan	Air Flow Rate	H/M/L (UL)	CMM	8.2/7/6.3	9/7.7/6.5	10/ 8.5/7.5	10.5/9.5/8	11.5/10.2/9	13/11/ 9.5	13.5/12/10.2
			l/s	137/117/105	150/128/108	166/141/125	175/158/133	191/170/150	216/183/158	225/200/170
Piping Connections	Liquid Pipe		Ø, inch	1/4						
	Gas Pipe			1/2						
Fuse Rating				5A						
Sound	Sound Pressure	High/Mid/Low*4)	dBA	30/28/23	32/30/27	34/30/26	36/34/31	36/35/33	40/37/34	41/38/35
Dimensions	Net Weight		kg	12.00						
	Net Dimensions (WxHxD)		mm	575 x 250 x 575						
Panel Size	Panel Model		-	PC4SUSMEN						
	Panel Net Weight		kg	2.70						
	Net Dimensions (WxHxD)		mm	670 x 45 x 670						
Additional Accessories	Drain Pump	Drain Pump	-/Model	Built-in						
		Max. Lifting Height / Displacement	mm/litre/h	750/24						
	Air Filter		-	Long life filter						
	Panel Option			PC4SUSMAN						
	Motion Detector Sensor			MCR-SMA						
	Virus Doctor			MSD-CAN1						

These products contain fluorinated greenhouse gas (R410A).


Ideal Compact Size

4Way Mini Cassette air conditioner can be installed on one standard ceiling tile (600Wx600D), which can reduce installation time.

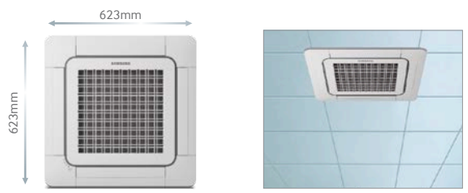

Compact and Light Unit


The Samsung 4Way Mini Cassette indoor unit is now lighter in weight at 11kg. It is the lightest indoor unit in the industry, about 35% lighter than our competitor's products.



*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

Mini 4Way Cassette Dimensional Drawing

Units: mm

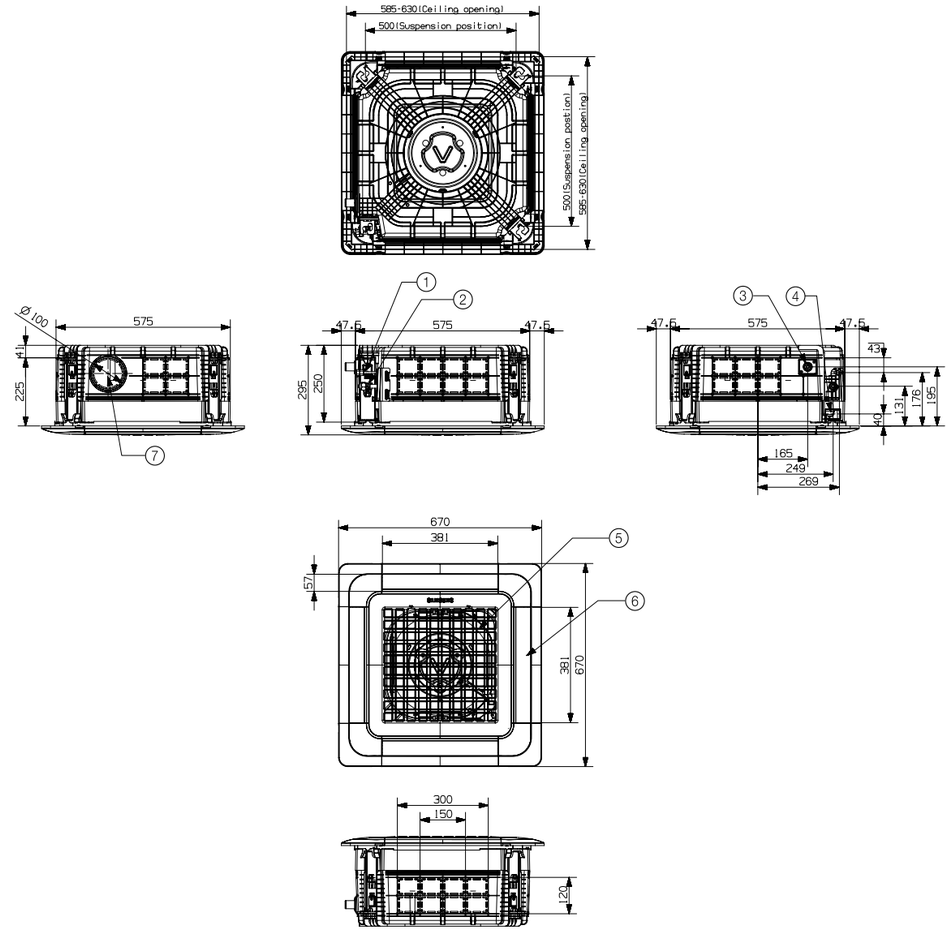

No.	Name	Description
1	Liquid pipe connection	Ø6.35 Flare
2	Gas pipe connection	Ø12.70 Flare
3	Drain pipe connection	VP25 (OD 32, ID 25)
4	Conduit for power supply and communication wiring	-
5	Air inlet grille	-
6	Air outlet louver	-
7	Fresh air intake	Ø100

360 Cassette Specifications



Model Name				AM045KN4DEH	AM056KN4DEH	AM071KN4DEH		AM090KN4DEH	AM112KN4DEH	AM128KN4DEH	AM140KN4DEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	4.5	5.6	7.1		9.0	11.2	12.8	14.0
		Heating*3)		5.0	6.3	8.0		10.0	12.5	13.8	16.0
Fan	Air Flow Rate	H/M/L (UL)	CMM	14.5/13.5/12.5	16.0/14.5/13.5	18.0/16.0/14.0		22.0/18.5/16.0	25.5/21.0/17.5	29.5/24.0/19.0	31.5/26.5/21.0
			l/s	241/225/208	267/242/225	300/267/233		367/308/267	425/350/292	492/400/317	525/442/350
Piping Connections	Liquid Pipe		Ø, mm | inch	6.35 | 1/4		9.52 | 3/8		9.52 | 3/8			
	Gas Pipe			12.7 | 1/2		15.88 | 5/8		15.88 | 5/8			
Drain Pipe				VP25(OD32/ID25)							
Field Wiring	Power Source Wire	Below 20m/ over 20m	mm^2	1.5/2.5							
Fuse Rating	Transmission Cable			5A							
Sound	Sound Pressure	High/Mid/Low*4)	dBA	33 /31/29	34 /32/29	36 /33/30		40 /36/32	40 /36/32	42/38/33	42/40/35
Dimensions	Net Weight		kg	21					24		
	Net Dimensions (WxHxD)		mm	947x281x947					947x365x947		
Panel Size (Square)	Panel Model		-	PC4NUDMAN				PC4NUDMAN			
	Panel Net Weight		kg	3.6				3.6			
	Net Dimensions (WxHxD)		mm	1000 x 66 x 1000				1000 x 66 x 1000			
Panel Size (Square)	Panel Model		-	PC4NUNMAN				PC4NUNMAN			
	Panel Net Weight		mm	2.7				2.7			
	Net Dimensions (WxHxD)		mm	1050 x 94 x 1050				1050 x 94 x 1050			
Additional Accessories	Drain Pump	Drain Pump	-/Model	Built-in				Built-in			
		Max. Lifting Height / Displacement	mm/litre/h	750/24				750/24			

These products contain fluorinated greenhouse gas (R410A).

The World's First Circular Cassette

This innovative circular design blends harmoniously into any type of interior design.



Circular LED Display Window

Circular LED displays the operation modes of the unit graphically.



360 Air Flow

360 degree directional **airflow** coming out from circular heat exchanger can deliver air evenly throughout every corner in any space.



Blade-less

The air volume decrease from blade interference is down from 25% to Zero and with the booster fan, the vertical direction of air flow can be controlled without blade.



*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

Model Name	
PC4NUNMAN	360 Cassette Fascia Panel (Exposed Round)
PC4NUDMAN	360 Cassette Fascia Panel (Square)
AR-KH00E	360 Wireless Remote Controller
MSD-CAN1	Virus Doctor
MRW-TA	External Remote Temp. Sensor
MIM-B14	External Contact Interface

Individual control



AR-KH00E

Decorative panel



PC4NUDMAN



PC4NUNMAN

VRF INDOOR UNITS

Slim Duct Specifications



Pre Filter | Easy Filter | High Lift-UP | Smart Control | Wired RC


Model Name				AM017FNLDEH	AM022FNLDEH	AM028FNLDEH	AM036FNLDEH	AM045FNLDEH	AM056FNLDEH	AM071FNLDEH	AM090FNLDEH	AM112FNLDEH	AM128FNLDEH	AM140FNLDEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	1.7	2.2	2.8	3.6	4.5	5.6	7.1	9.0	11.2	12.8	14.0
		Heating*3)		1.9	2.5	3.2	4.0	5.0	6.3	8.0	10.0	12.5	13.8	16.0
Fan	Air Flow Rate	H/M/L (UL)	CMM	5.5/4.3/3.2	7/6.1/5.3	7.5/6.6/5.6		11/9.6/8.3	12/10.5/9	16.5/15/13.5	29/ 27/25	31.2/29/27	34/32/30	36/34/32
			l/s	92/72/53	116/101/88	125/110/93		183/160/138	200/175/150	275/250/225	483/450/416	520/483/450	566/533/500.00	600.00/566.67/533.33
	External Static Pressure	Min/Std/Max	mmAq	0.00/1.00/3.00				0.00/2.00/4.00		0.00/2.00/4.00	0.00/3.00/6.00			
			Pa	0.00/9.81/29.42				0.00/19.61/39.23		0.00/19.61/39.23	0.00/29.42/58.84			
			WG	0/0.039 /0.118				0/0.079/0.157		0/0.079/0.157	0 /0.118/0.236			
Piping Connections	Liquid Pipe		Ø, inch	1/4						3/8				
	Gas Pipe			1/2						5/8				
Fuse Rating				5A						5A				
Sound	Sound Pressure	High/Mid/Low*4)	dBA	21/20/19	26/24/21	28/26/23	32/30/27	35/31/26	36/34/31	38/36/33	37/36/34			39/38/36
Dimensions	Net Weight		kg	19.00			19.50	23.50		30.00	44.00		46.00	
	Net Dimensions (WxHxD)		mm	700 x 199 x 600				900 x 199 x 600		1100 x 199 x 600	1300 x 295 x 690			
Additional Accessories	Optional Drain Pump	Drain Pump	-/Model	MDP-E075SEE3D						MDP-E075SEE3D				
		Max. Lifting Height / Displacement	mm/litre/h	750/24						750/24				
	Air Filter		-	Long life filter						Long life filter				

These products contain fluorinated greenhouse gas (R410A).

VRF INDOOR UNITS


Compact Size

Slim Duct S has achieved a more compact and slim size with its width, which is 200mm narrower than conventional products. This enables flexible installation and maintenance in various spaces.



Flexible Installation

The air inlet can be set up either on the bottom or rear of the unit, giving you greater flexibility in installation.

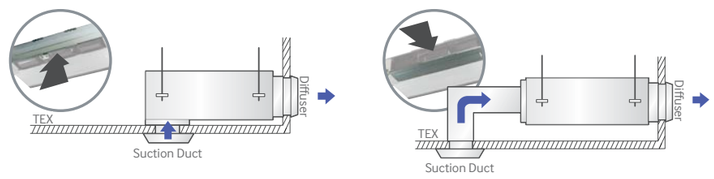

Indoor Discharge Temperature Control

Without changing the outdoor unit's setting, each ducted indoor unit or AHU kit has a discharge air temperature control function, offering greater comfort in cooling or heating mode.

This is set by each MWR-WE10N remote control in detailed setting mode and is only applicable to ALL ducted/AHU connected systems.

Target Temperature

Cooling: 11~18 degrees


Heating: 30~43 degrees

*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

Slim Duct Dimensional Drawings | AM017/022/028/036/045/056FNLDEH

Units: mm

Models	AM017/022/028/036FNLDEH			
No.	Name	Description		
		2.2kW	2.8kW	3.6kW
1	Liquid pipe connection	Ø6.35 Flare		
2	Gas pipe connection	Ø12.70 Flare		
3	Drain pipe connection without optional drain pump kits	VP25 (OD 32, ID 25)		
4	Drain pipe connection with optional drain pump kits	VP25 (OD 32, ID 25)		
5	Power supply/ Communication connection	-		
6	Power supply connection	-		
7	Air discharge grille flange	-		
8	Hook	3/8" or M10		

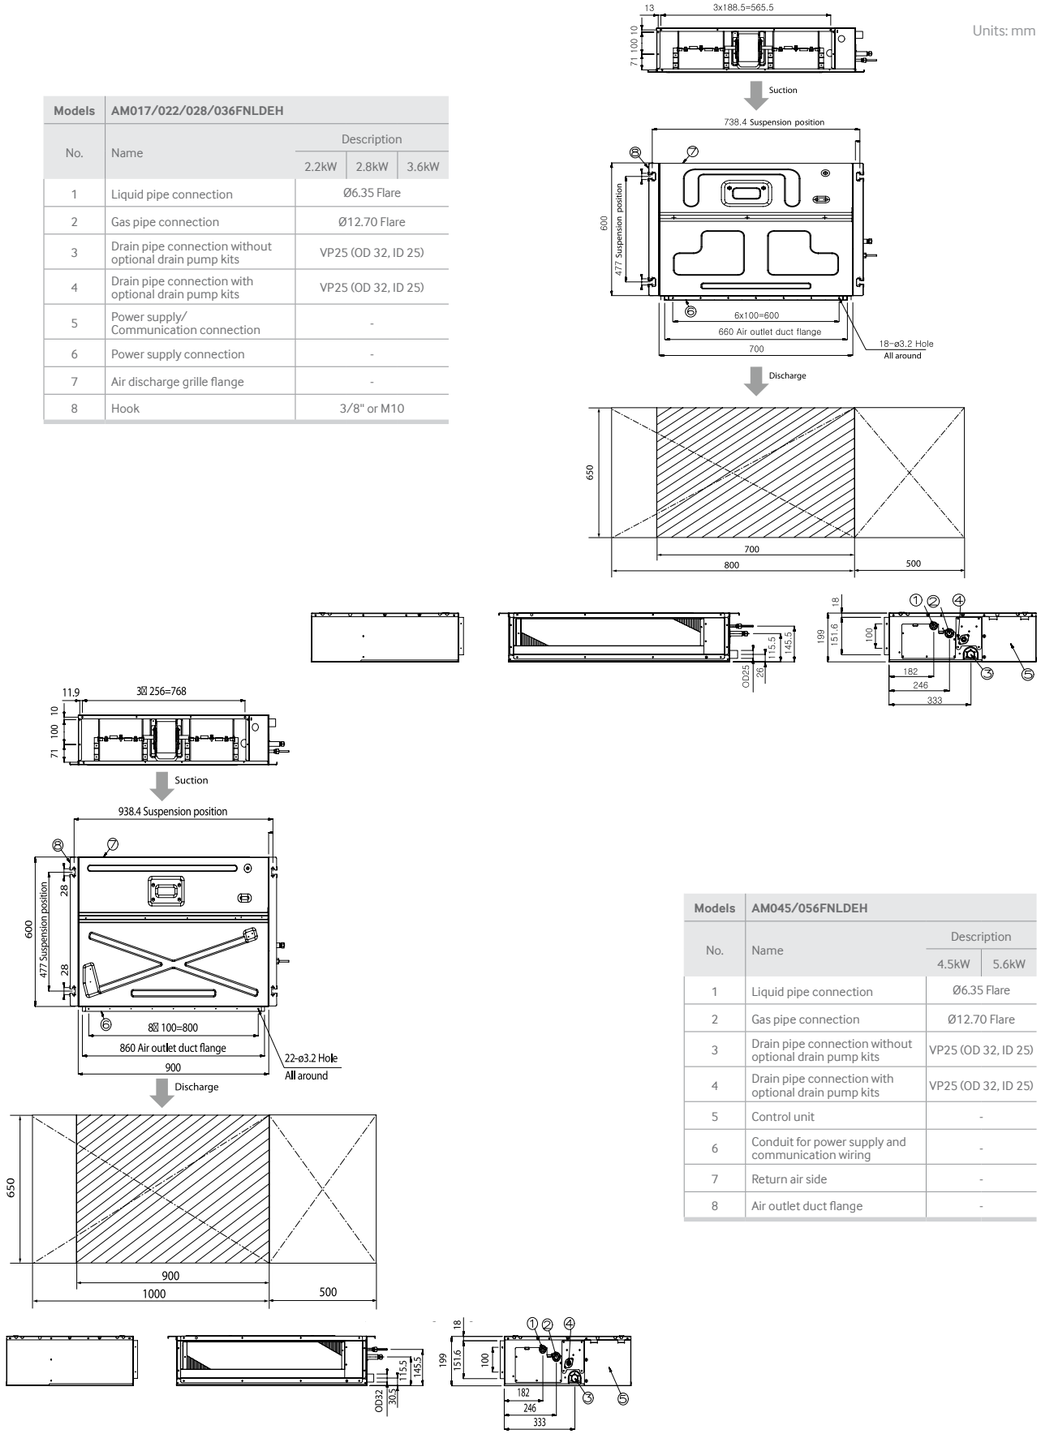



Models	AM045/056FNLDEH		
No.	Name	Description	
		4.5kW	5.6kW
1	Liquid pipe connection	Ø6.35 Flare	
2	Gas pipe connection	Ø12.70 Flare	
3	Drain pipe connection without optional drain pump kits	VP25 (OD 32, ID 25)	
4	Drain pipe connection with optional drain pump kits	VP25 (OD 32, ID 25)	
5	Control unit	-	
6	Conduit for power supply and communication wiring	-	
7	Return air side	-	
8	Air outlet duct flange	-	

Slim Duct Dimensional Drawings | AM071/090/112/128/140FNLDEH

Units: mm

Model	AM071FNLDEH	
No.	Name	Description
		7.1kW
1	Liquid pipe connection	Ø9.52 Flare
2	Gas pipe connection	Ø15.88 Flare
3	Drain pipe connection without optional drain pump kits	VP25 (OD 32, ID 25)
4	Drain pipe connection with optional drain pump kits	VP25 (OD 32, ID 25)
5	Control unit	-
6	Conduit for power supply and communication wiring	-
7	Return air side	-
8	Air outlet duct flange	-

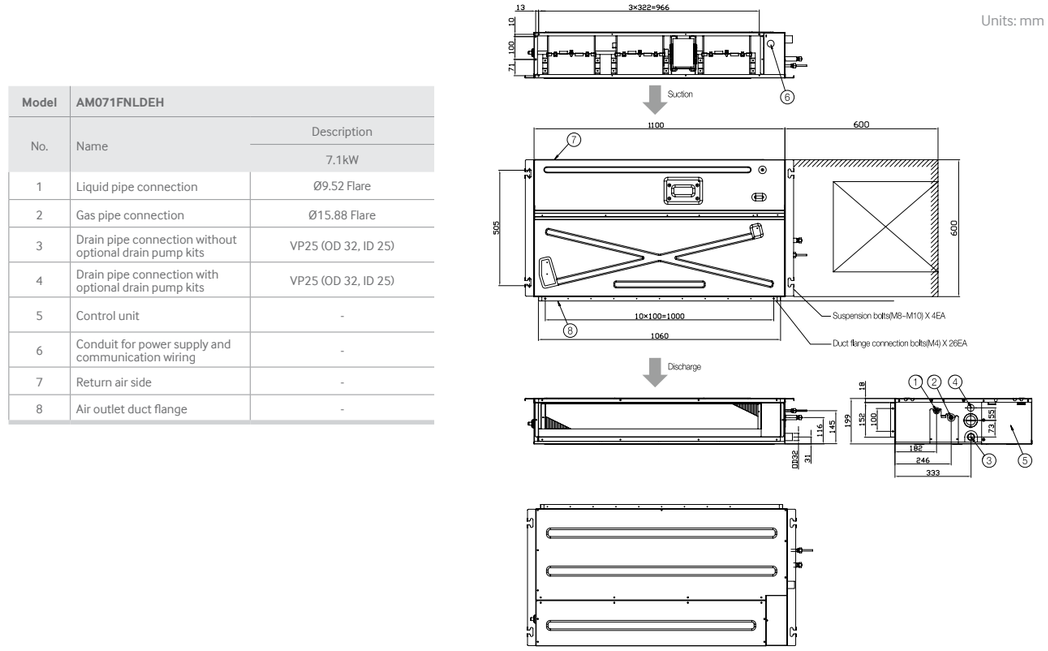

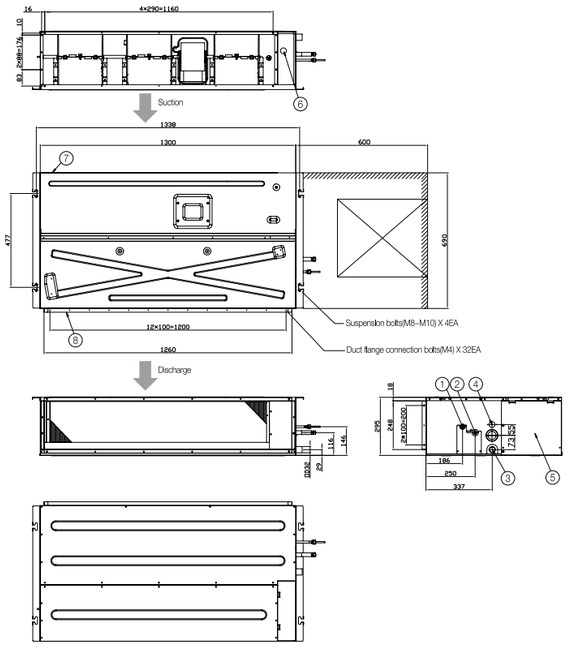

Models	AM090/112/128/140FNLDEH				
No.	Name	Description			
		9.0kW	11.2kW	12.8kW	14.0kW
1	Liquid pipe connection	Ø9.52 Flare			
2	Gas pipe connection	Ø15.88 Flare			
3	Drain pipe connection without optional drain pump kits	VP25 (OD 32, ID 25)			
4	Drain pipe connection with optional drain pump kits	VP25 (OD 32, ID 25)			
5	Control unit	-			
6	Conduit for power supply and communication wiring	-			
7	Return air side	-			
8	Air outlet duct flange	-			

MSP Duct S Specifications





Pre Filter | Easy Filter | High Lift-UP | Smart Control | Wired RC

Model Name				AM022FNMDEH	AM028FNMDEH	AM036HNMPKH	AM045HNMPKH	AM056HNMPKH		AM071HNMPKH	AM090HNMPKH	AM112HNMPKH	AM128HNMPKH	AM140HNMPKH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	2.2	2.8	3.6	4.5	5.6		7.1	9.0	11.2	12.8	14.0
		Heating*3)		2.5	3.2	4.0	5.0	6.3		8.0	10.0	12.5	13.8	16.0
Fan	Air Flow Rate	H/M/L (UL)	CMM	8.50/7.50/6.30	10.00/9.20/7.50	12.00/9.50/8.00	14.00/11.00/8.00	12.00/9.50/8.00		22.00/19.00/16.00	29.00/25.00/22.00	35.00/29.00/22.00	38.00/32.00/25.00	42.00/42.00/25.00
			l/s	141/125/105	166/153/125	200/158/133	233/183/133	267/225/183		367/317/267	483/417/367	583/483/367	633/533/417	700/567/417
	External Static Pressure	Min/Std/Max	mmAq	0.00/2.00/6.00		2.50/15.00	3.00/15.00			3.00/15.00	4.00/15.00	5.20/15.00		
			Pa	0.00/19.61/58.84		24.50/147.00	29.4/147.00			29.40/147.00	39.20/147.00	50.96/147.00		
Piping Connections	Liquid Pipe		Ø, inch	1/4						3/8				
	Gas Pipe			1/2						5/8				
Fuse Rating				5A						5A				
Sound	Sound Pressure	High/Mid/Low*4)	dBA	23/21/19	24/22/19	29/26/23	31/28/24	32/29/25		37/33/29	38/35/32		39/36/32	40/37/32
	Sound Power (cooling)			-	-	47.0	49.0			57.0	58.0	62.0	63.0	65.0
Dimensions	Net Weight		kg	23.50		25.5				25.50	32.50	38.50		
	Net Dimensions (WxHxD)		mm	900 x 199 x 600		850 x 250 x 700				850 x 250 x 700	1200/250/700	1300 x 300 x 700		
Additional Accessories	Optional Drain Pump	Drain Pump	-/Model	MDP-E075SEE3D		MDP-G075SP				MDP-G075SP				
		Max. Lifting Height / Displacement	mm/litre/h	750/24						750/24				
	Virus Doctor			-		MSD-EAN1				MSD-EAN1				
	Air Filter		-	Long life filter						Long life filter				

These products contain fluorinated greenhouse gas (R410A).

FME/FMC (HNMP models)
(Flat Micro-channel Evaporator/Condenser)


Samsung's FME/FMC technology achieves a 30% increase in efficiency compared with the conventional fin and tube type. It has also enabled a 30% decrease in unit size.

	Heat Exchange Ratio
Fin and Tube	100%
FMC	130%

Enhanced Performance
30% Enhanced heat exchange ratio



Anti-Corrosion Coating
Corrosion resistance has been improved compared to current model




Slim Fit

Compact Slim Fit design has reduced volume and weight compared to conventional air conditioners. It's 30% smaller, so it fits into small spaces. Although the size is smaller, efficiency is increased.



Wide Range of ESP

You can offer a comprehensive range of products. right capacity, right ESP, and right-sized product for our customers.



*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

Indoor Discharge Temperature Control

Without changing the outdoor unit's setting, each ducted indoor unit or AHU kit has a discharge air temperature control function, offering greater comfort in cooling or heating mode.

This is set by each MWR-WE10N remote control in detailed setting mode and is only applicable to ALL ducted/AHU connected systems.

Target Temperature

Cooling: 11~18 degrees

Heating: 30~43 degrees

Virus Doctor (optional accessory)


Our Virus Doctor device eliminates airborne contaminants and creates even healthier air for your environments. This optional device can be easily installed by simply inserting the Virus Doctor kit into the indoor unit.

The Virus Doctor device generates active hydrogen and oxygen ions which eliminate biological contaminants and active oxygen (OH-radical) in the air by turning them into harmless H_2O.

- Elimination of airborne virus and bacteria (subtype H1N1)
- Complete eradiction of bacteria
- Relief of allergies by eradicating airborne allergens
- Neutralisation of OH-radical (as known as active oxygen)



Virus and Active Hydrogen turns into harmless H_2O

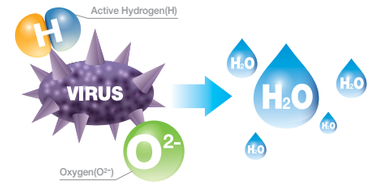




VRF INDOOR UNITS

MSP Duct S

Dimensional Drawings | AM022/028FNMDEH AM036/045/056/071HNMPKH

Units: mm


Models	AM022/028FNMDEH			
No.	Name	Description		
		2.2kW	2.8kW	3.6kW
1	Liquid pipe connection	Ø6.35 Flare		
2	Gas pipe connection	Ø12.70 Flare		
3	Drain pipe connection without optional drain pump kits	VP25 (OD 32, ID 25)		
4	Drain pipe connection with optional drain pump kits	VP25 (OD 32, ID 25)		
5	Control unit	-		
6	Conduit for power supply and communication wiring	-		
7	Return air side	-		
8	Air outlet duct flange	-		

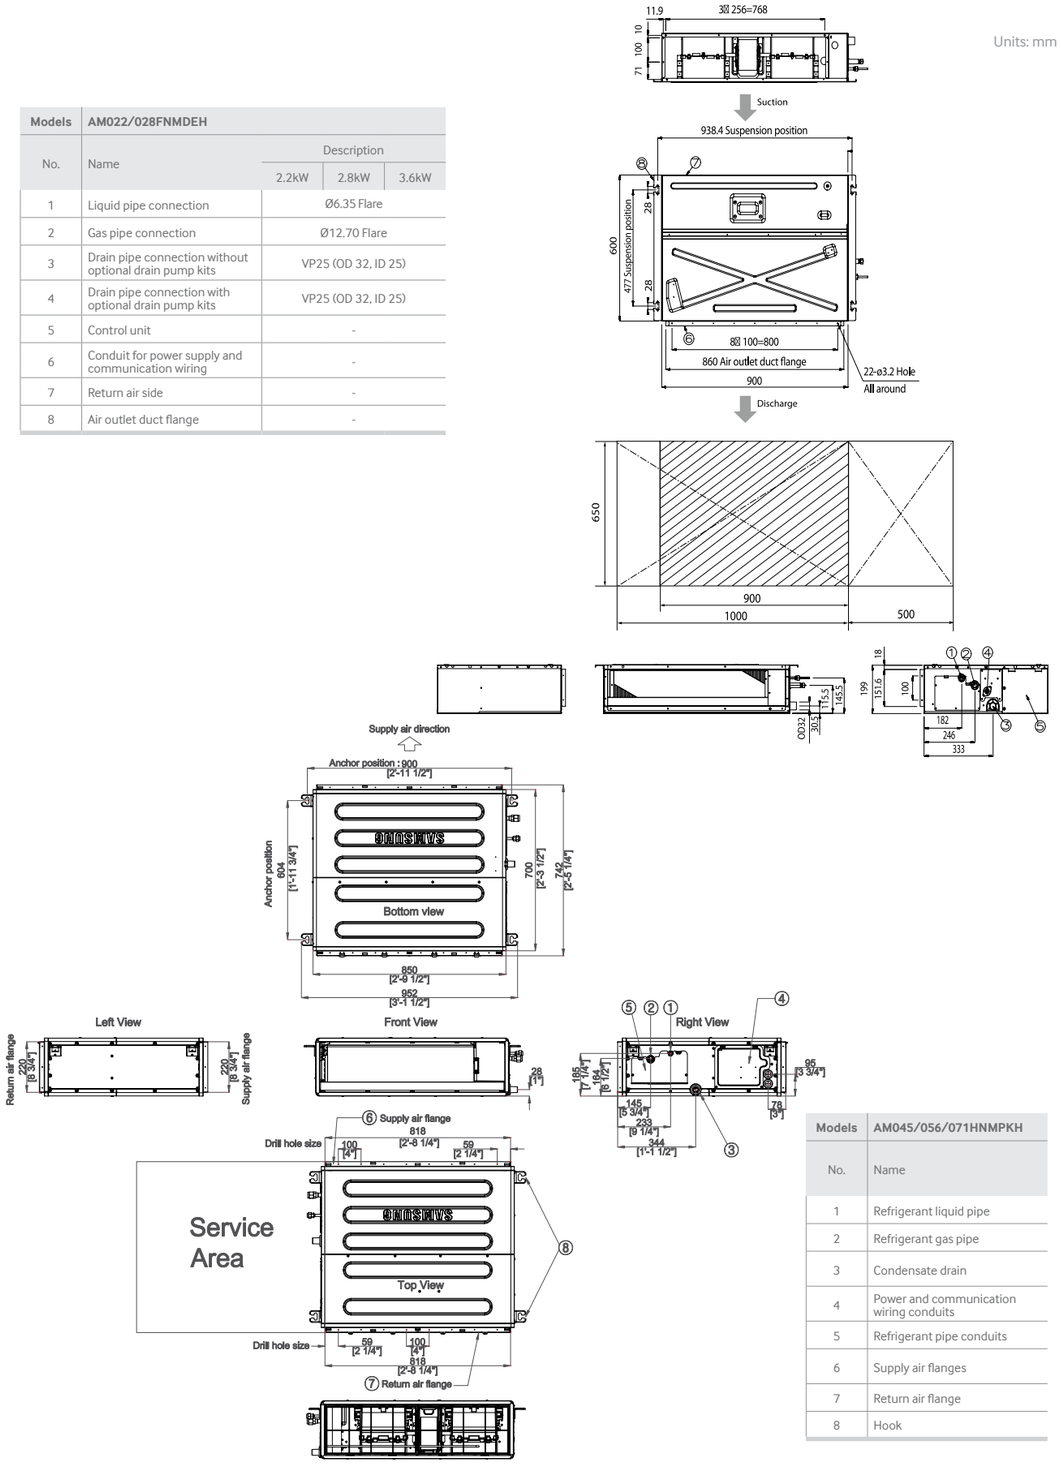

Models	AM045/056/071HNMPKH
No.	Name
1	Refrigerant liquid pipe
2	Refrigerant gas pipe
3	Condensate drain
4	Power and communication wiring conduits
5	Refrigerant pipe conduits
6	Supply air flanges
7	Return air flange
8	Hook

AM090HNMPKH

Units: mm

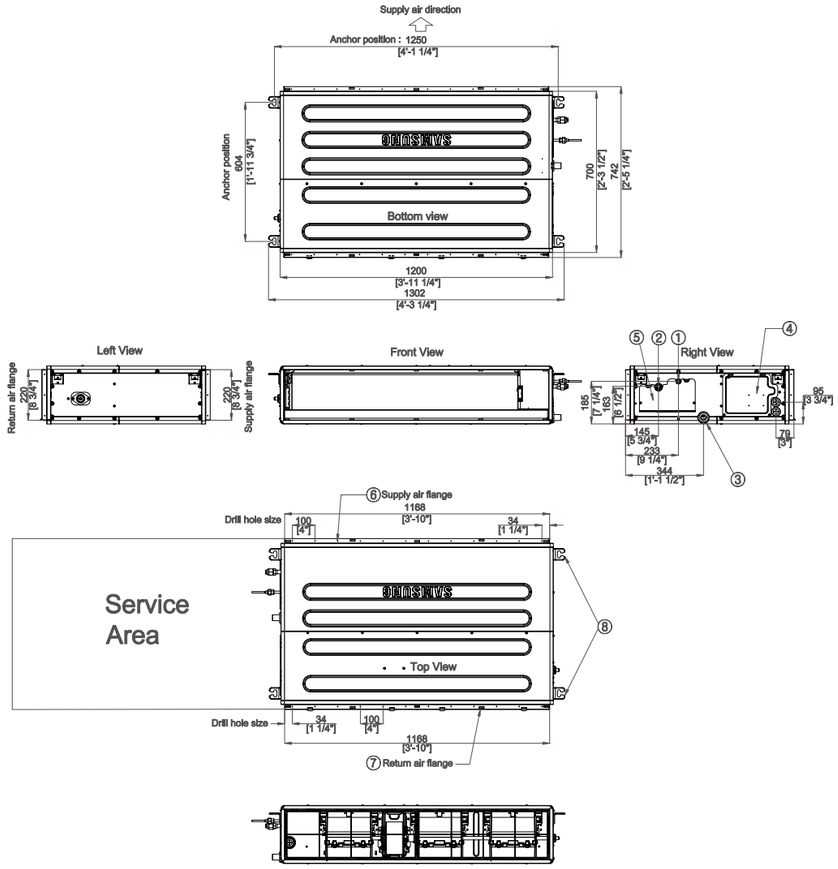


Models	AM090HNMPKH
No.	Name
1	Refrigerant liquid pipe
2	Refrigerant gas pipe
3	Condensate drain
4	Power and communication wiring conduits
5	Refrigerant pipe conduits
6	Supply air flanges
7	Return air flange
8	Hook

MSP Duct S

Dimensional Drawings | AM128/140HNMPKH

Units: mm

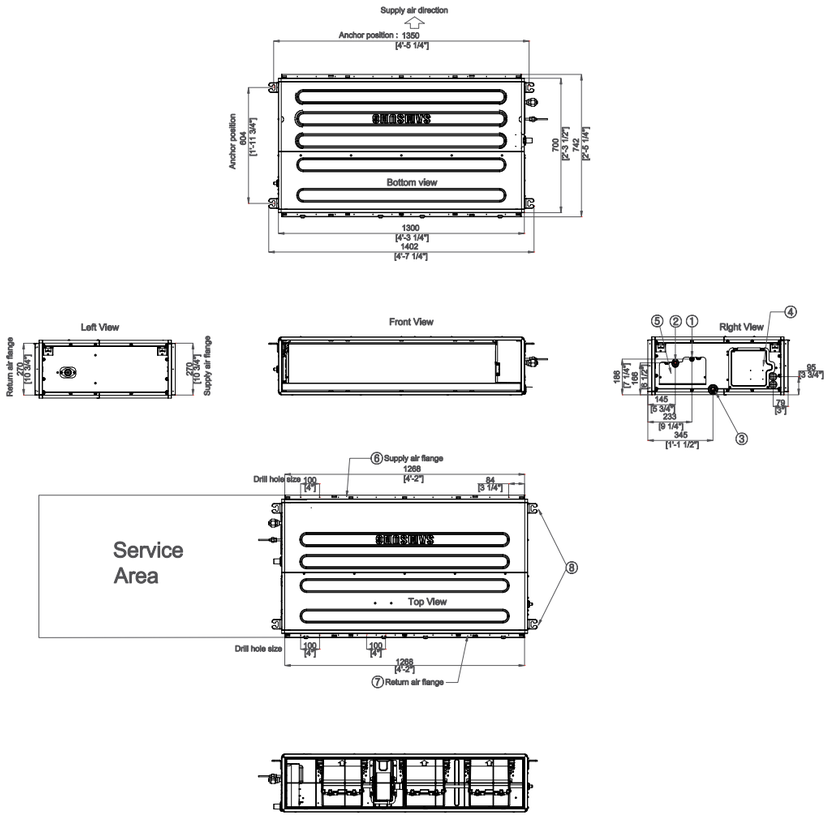

Models	AM045/056/071HNMPKH
No.	Name
1	Refrigerant liquid pipe
2	Refrigerant gas pipe
3	Condensate drain
4	Power and communication wiring conduits
5	Refrigerant pipe conduits
6	Supply air flanges
7	Return air flange
8	Hook

Air Handling Unit (AHU) Kit

The Samsung AHU kit allows DVM S outdoor units to connect to third-party AHUs.

Line-up

4-Kit line-up: 2.5HP~10HP.

- Multiple kits can be used together up to 80HP on a single DVM S system
- Use on all VRF (HP/HR)
- Can be installed on systems with other indoor unit types
- Self control (sensor included)
- Simple BMS can be applied – 0~10V control
- Compressor capacity and super heat control
- Discharge temperature control

AHU Kit Contents

- Control Kit (PCB, Terminal Block (contact module) in IP54 enclosure
- EEV (filter included)
- Temperature Sensor


Optional Accessories

- Wired Remote Controller
- Central Controller – AHU icon option
- DMS2 – use AHU parameters in control
- Logic Programming

AHU Specifications

AHU Kit Model	Capacity	AHU Capacity Allowance (kW)		AHU Internal Heat Exchanger Volume Allowance (cm^3)	
		Minimum	Maximum	Minimum	Maximum
MXD-K025AN	2.5HP	7	8.75	1,200	1,500
MXD-K050AN	5.0HP	14	17.5	2,150	2,688
MXD-K075AN	7.5HP	21	26.25	3,100	3,875
MXD-K100AN	10HP	28	35	4,000	5,000

Example

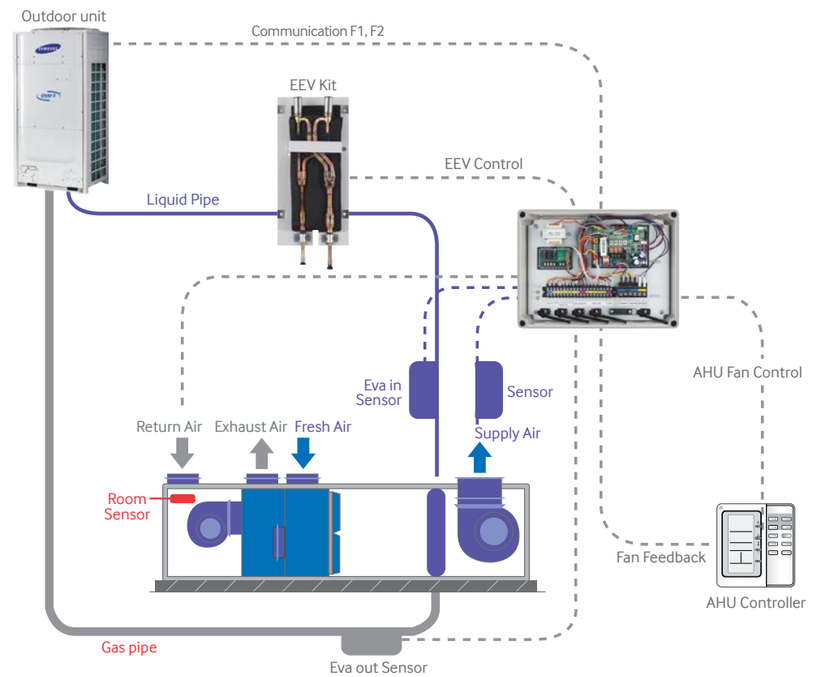

HSP Duct Specifications




Pre Filter | Easy Filter | High Lift-UP | Smart Control | Wired RC

Model Name				AM112HNHPKH	AM128HNHPKH	AM140HNHPKH	AM180JNHFKH	AM224JNHFKH	AM280FNHDEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	11.2	12.8	14.0	18.0	22.4	28.0
		Heating*3)		12.5	13.8	16.8	20.0	25.0	31.5
Fan	Air Flow Rate	H/M/L (UL)	CMM	35/29/22	38/32/25	42/34/25	58/50/43	72/61/50	72/65/58
			l/s	583/483/367	633/533/417	700/567/417	967/833/717	1,200/1,017/833	1,200/1,083/966
	External Static Pressure	Min/Std/Max	mmAq	3/6/20			5/7.34/20		5/15/28
			Pa	29/61/196			49/72/196		49.03/147.10/274.59
Piping Connections	Liquid Pipe		Ø, inch	3/8					
	Gas Pipe			5/8			3/4		7/8
Fuse Rating				5A			13A		
Sound	Sound Pressure	High/Mid/Low*4)	dBA	38/35/32	39/36/32	40/37/32	43/39/35	44/40/36	48/46/43
Dimensions	Net Weight		kg	46.5			82.5		89
	Net Dimensions (WxHxD)		mm	1,300 x 300 x 700			1,350 x 450 x 910		89
Additional Accessories	Optional Drain Pump	Drain Pump	-/Model	MDP-G075SP					MDP-N047SNC1D
		Max Lifting Height / Displacement	mm/litre/h	750/24					
	Air Filter		-	-					

These products contain fluorinated greenhouse gas (R410A).


High External Static Pressure

To properly deal with unexpected various installation conditions, HSP Duct is designed to manage high external static pressures up to 28mmAq.



Strong and Large Coverage Area


HSP duct features greater static pressure than most slim ducts: this enables you to design more inlets and outlets with longer duct work to provide even more cool or warm air to larger areas.





*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.


HSP Duct Dimensional Drawings | AM112/128/140/220HNHPKH


Units: mm

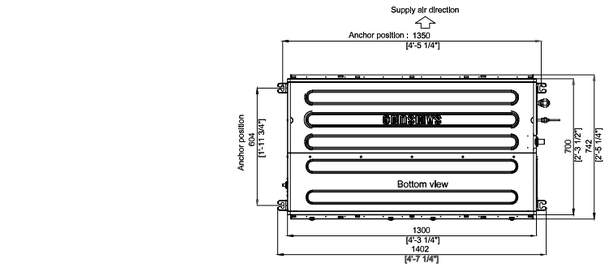








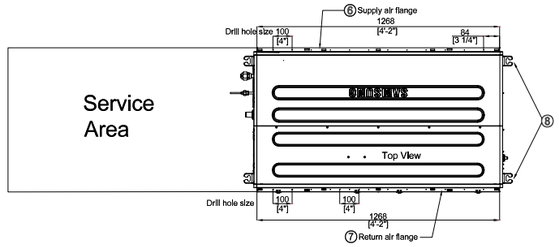



Models	AM112/128/140/220HNHPKH
No.	Name
1	Refrigerant liquid pipe
2	Refrigerant gas pipe
3	Condensate drain
4	Power and communication wiring conduits
5	Refrigerant pipe conduits
6	Supply air flange
7	Return air flange
8	Hook

Console Specifications



Virus Doctor | Interior Design | Anti-Virus Filter | Light Weight | Flexible

Model Name				AM022KNJDEH	AM028FNJDEH	AM036FNJDEH	AM045KNJDEH	AM056FNJDEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	2,2	2.8	3.6	4,5	5.6
		Heating*3)		2,5	3.2	4.0	5	6.3
Fan	Air Flow Rate	H/M/L (UL)	CMM	6.30/5.40/4.90	7.00/6.00/ 5.00	8.50/7.50/6.50	11.30/9.80/8.20	13.00/11.50/10.00
			l/s	105/90/82	116/100/83	141/125/108	188/163/137	216/191/166
Piping Connections	Liquid Pipe		Ø, inch	1/4				
	Gas Pipe			1/2				
	Drain Pipe		Ø, mm	ID 18 HOSE				
Fuse Rating				5A				
Sound	Sound Pressure	High/Mid/Low*4)	dBA	34/33/31	38/36/34	39/37/34	42/39/36	43/40/37
Dimensions	Net Weight		kg	15,5	16.00			
	Net Dimensions (WxHxD)		mm	720 x 620 x 199				
Additional Accessories	Air Filter		-	Long life filter				
	Virus Doctor			Built-in				

These products contain fluorinated greenhouse gas (R410A).

Slim Design

You won't find anything slimmer than this: the new Console type air conditioner is only 199mm thick, the slimmest on the market, and its unobtrusive design easily integrates into your decor.



2Way Air Outlets


There are two separate air outlets for cooling and heating. The warmer air comes out from the bottom part of the air outlet to spread the warm air evenly throughout the room. Stay cooler and warmer in every corner of your room.



*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

Console Dimensional Drawings | AM028/036/056FNJDEH, AM022/045KNJDEH

Units: mm

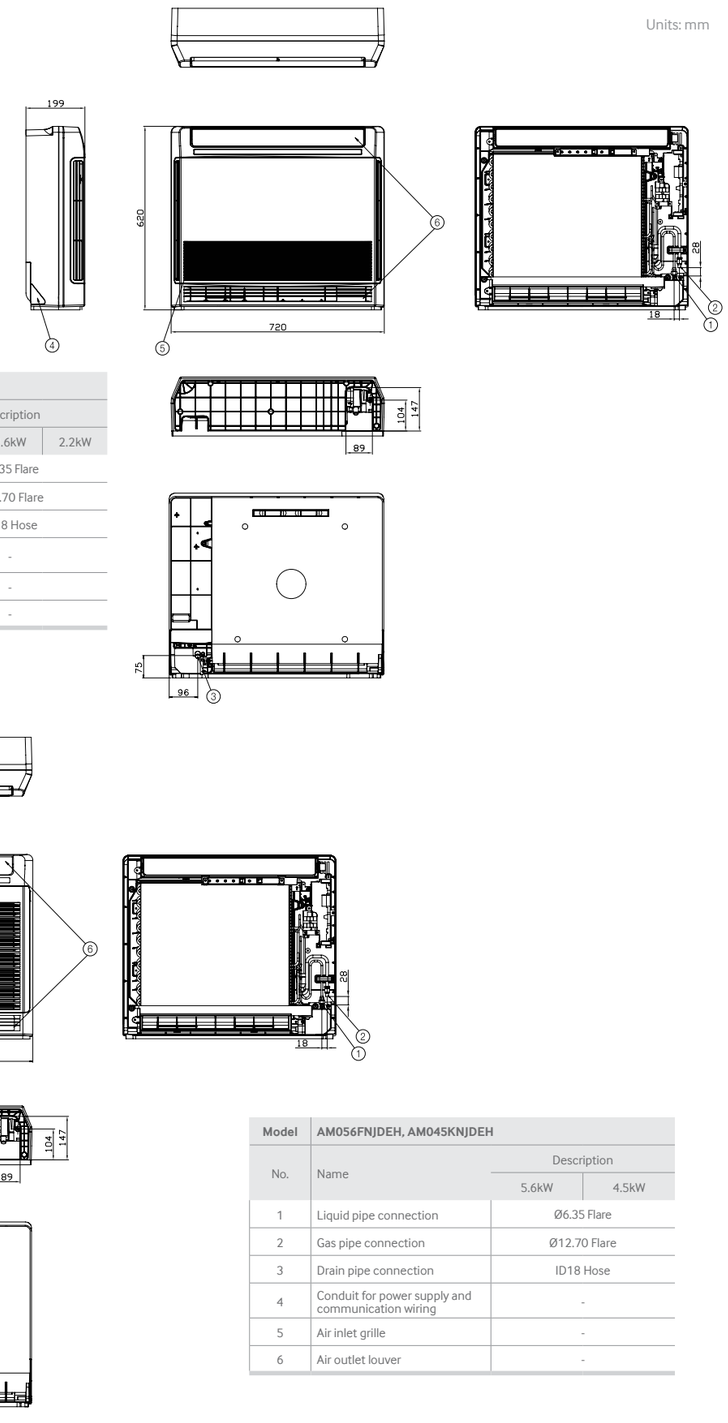

Models	AM028/036FNJDEH, AM022KNJDEH			
No.	Name	Description		
		2.8kW	3.6kW	2.2kW
1	Liquid pipe connection	Ø6.35 Flare		
2	Gas pipe connection	Ø12.70 Flare		
3	Drain pipe connection	ID18 Hose		
4	Conduit for power supply and communication wiring	-		
5	Air inlet grille	-		
6	Air outlet louver	-		

Model	AM056FNJDEH, AM045KNJDEH		
No.	Name	Description	
		5.6kW	4.5kW
1	Liquid pipe connection	Ø6.35 Flare	
2	Gas pipe connection	Ø12.70 Flare	
3	Drain pipe connection	ID18 Hose	
4	Conduit for power supply and communication wiring	-	
5	Air inlet grille	-	
6	Air outlet louver	-	

Ceiling Specifications



Interior Design | Anti-Virus Filter | Light Weight | Flexible

Model Name				AM056FNCDEH	AM071FNCDEH	AM112JNCDKH	AM140JNCDKH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	5.6	7.1	11.2	14.0
		Heating*3)		6.3	8.0	12.5	16.0
Fan	Air Flow Rate	H/M/L (UL)	CMM	14.00/13.00/ 12.00	18.00/16.50/15.00	29.3/23.9/18.5	36.4/30.8/26.0
			l/s	233/216/200.	300/275/250	488/398/308	607/513/433
Piping Connections	Liquid Pipe		Ø, inch	1/4	3/8		
	Gas Pipe			1/2	5/8		
Refrigerant Control				EEV Kit required		EEV Included	
Fuse Rating				5A			
Sound	Sound Pressure	High/Mid/Low*4)	dBA	40/37/34	44/42/40	45/41/37	46/43/38
Dimensions	Net Weight		kg	21.00		33.5	42.5
	Net Dimensions (WxHxD)		mm	1000 x 650 x 200		1350 x 235 x 675	1650 x 235 x 675
Additional Accessories	Air Filter		-	Long life filter			

These products contain fluorinated greenhouse gas (R410A).

2Way Installation (5.6 and 7.1kW models)

Depending on the available space and the purpose of the air conditioner, the indoor unit can be installed under the ceiling or on the floor.

Under Ceiling



Floor Standing




Virus Doctor (11.2 and 14kW models)


Our Virus Doctor eliminates airborne contaminants and creates even healthier air for your environments. This optional device can be easily installed by simply installing the Virus Doctor kit into the indoor unit.

The Virus Doctor device generates active hydrogen and oxygen ions which eliminate biological contaminants and active oxygen (OH-radical) in the air by turning them into harmless H_2O.

- Elimination of airborne virus and bacteria (subtype H1N1)
- Complete eradication of bacteria
- Relief of allergies by eradicating airborne allergens
- Neutralising of OH-radical (as known as active oxygen)

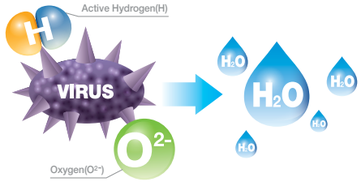

Virus and Active Hydrogen turns into harmless H_2O

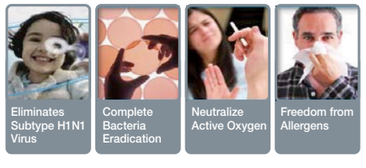


*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

Ceiling Dimensional Drawings | AM056/071FNCDEH AM112/140JNCDKH

Units: mm

Models	AM056/071FNCDEH		
No.	Name	Description	
		5.6kW	7.1kW
1	Liquid pipe connection	Ø6.35 Flare	Ø9.52 Flare
2	Gas pipe connection	Ø12.70 Flare	Ø15.88 Flare
3	Drain pipe connection	ID18 Hose	
4	Conduit for power supply and communication wiring	-	
5	Air inlet grille	-	
6	Air outlet louver	-	

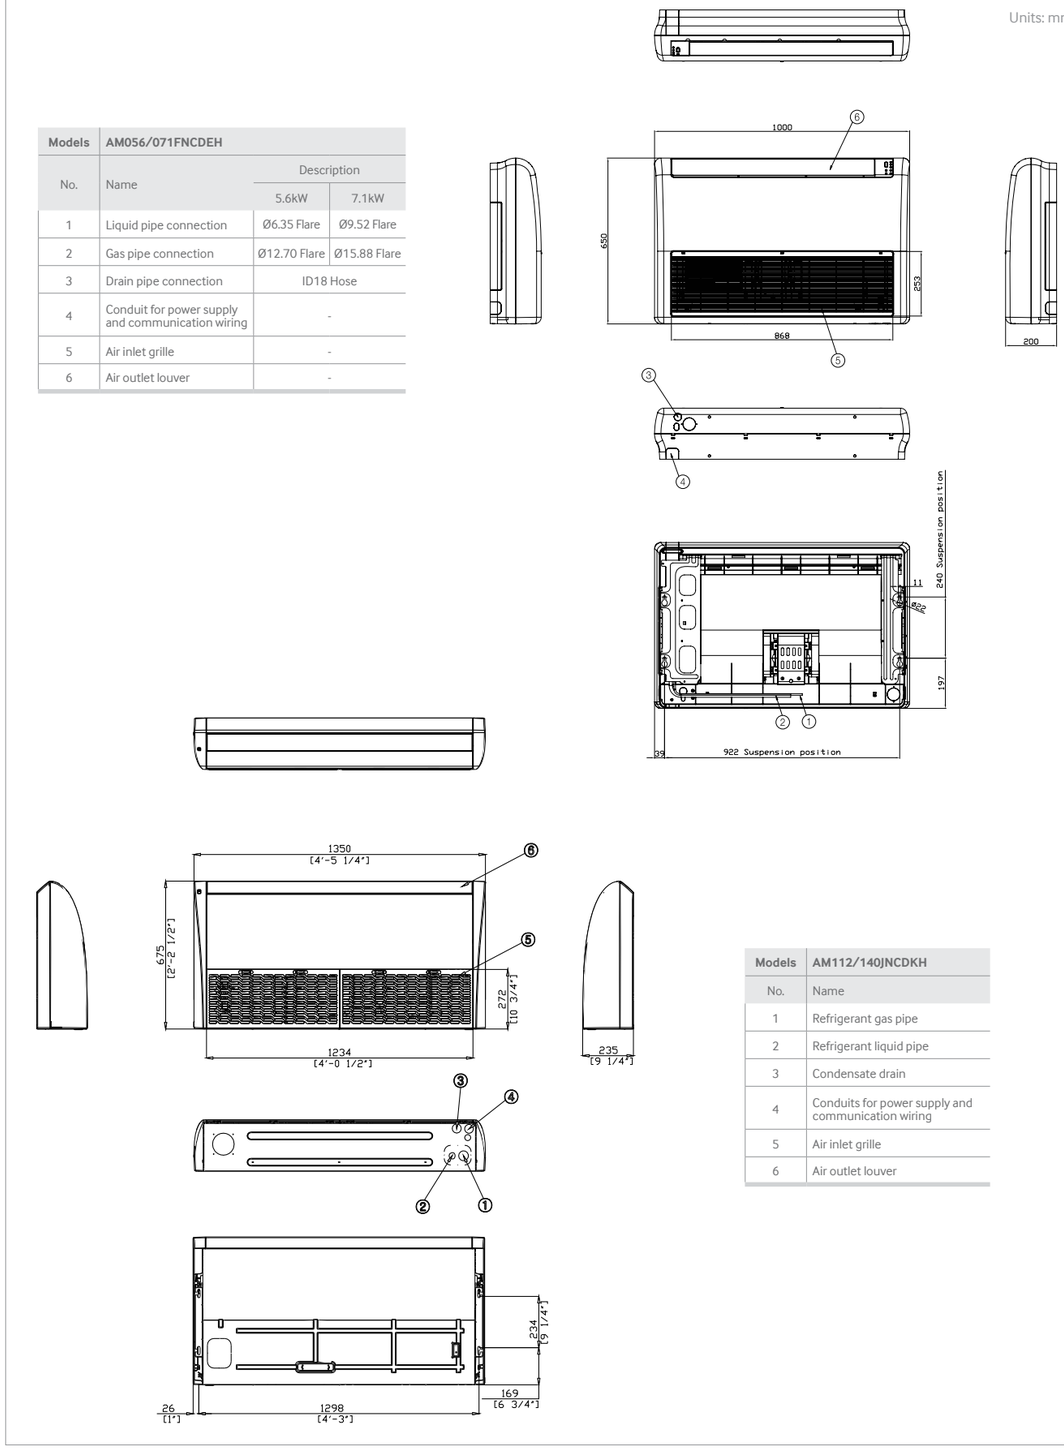

Models	AM112/140JNCDKH
No.	Name
1	Refrigerant gas pipe
2	Refrigerant liquid pipe
3	Condensate drain
4	Conduits for power supply and communication wiring
5	Air inlet grille
6	Air outlet louver

Wall (Neo-Forte E) Specifications



Deodorising Filter

good'sleep


Model Name				AM015HNQDEH	AM022FNQDEH	AM028FNQDEH	AM036FNQDEH	AM045FNQDEH	AM056FNQDEH	AM071FNQDEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	1.5	2.2	2.8	3.6	4.5	5.6	6.8
		Heating*3)		1.7	2.5	3.2	4.0	5.0	6.3	7.0
Fan	Air Flow Rate	H/M/L (UL)	CMM	5.4/5.1/4.8	7.8/6.8/5.8		9.3/8.3/7.3	11.7/10.2/8.7	13/10.5/9	14/12.5/11
			l/s	90/ 85/80	130/113/96		155/138/121	195/170/145	216/175/150	233/208/183
Piping Connections	Liquid Pipe		Ø, inch	1/4						3/8
	Gas Pipe		Ø, inch	1/2						5/8
Fuse Rating				5A						
Sound	Sound Pressure	High/Mid/Low*4)	dBA	26/25/24	30/28/26		37/33/29	39/37/35	41/38/35	44/40/35
Dimensions	Net Weight		kg	8.3				13.5		
	Net Dimensions (WxHxD)		mm	825 x 285 x 189				1,065 x 298 x 218		
Additional Accessories	Drain Pump	Drain Pump	-/Model	-						
		Max. Lifting Height / Displacement	mm/litre/h	-						
	Air Filter		-	Long life filter						

These products contain fluorinated greenhouse gas (R410A).


*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

Wall (Neo-Forte E) Dimensional Drawings | AM015HNQ AMS022/028/036/045/056/071FNQ

Units: mm

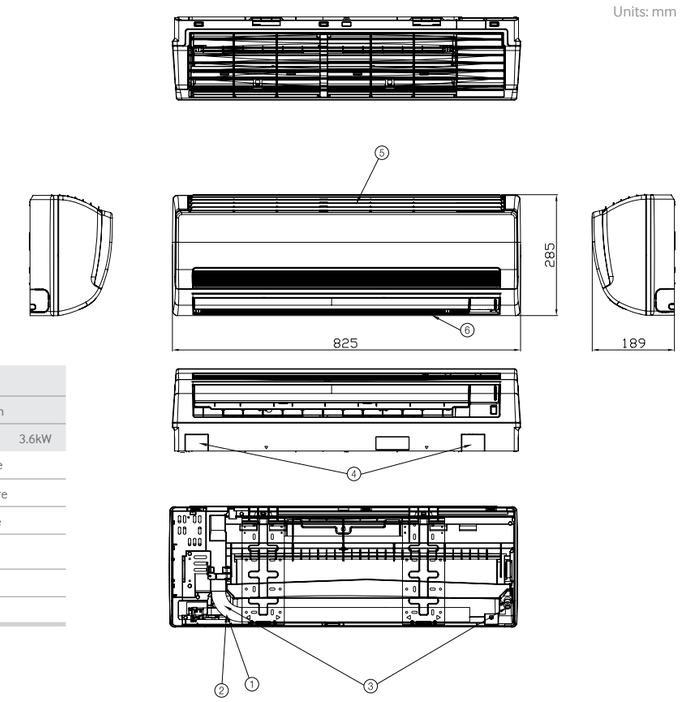

Models	AM022/028/036FNQ			
No.	Name	Description		
		2.2kW	2.8kW	3.6kW
1	Liquid pipe connection	Ø6.35 Flare		
2	Gas pipe connection	Ø12.70 Flare		
3	Drain pipe connection	ID18 Hose		
4	Conduit for power supply and communication wiring	-		
5	Air inlet grille	-		
6	Air outlet louver	-		

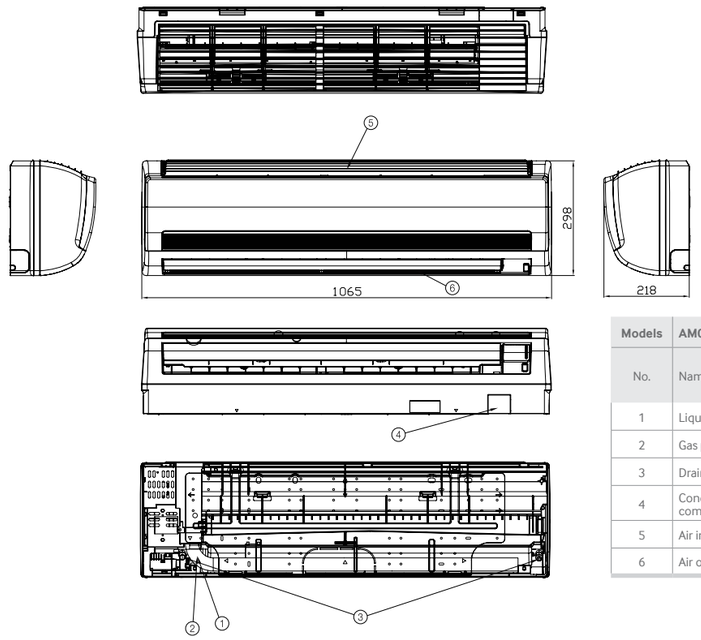

Models	AM045/056/071FNQ			
No.	Name	Description		
		4.5kW	5.6kW	7.1kW
1	Liquid pipe connection	Ø6.35 Flare		Ø9.52Flare
2	Gas pipe connection	Ø12.70 Flare		Ø15.88 Flare
3	Drain pipe connection	ID18 Hose		
4	Conduit for power supply and communication wiring	-		
5	Air inlet grille	-		
6	Air outlet louver	-		

Wall (A3050-E) Specifications



Deodorising Filter | good'sleep | Anti-Virus Filter | Virus Doctor

Model Name				AM015JNVDKH	AM022JNVDKH	AM028JNVDKH	AM036JNVDKH	AM045JNVDKH	AM056JNVDKH	AM071JNVDKH	AM082JNVDKH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	1.5	2.2	2.8	3.6	4.5	5.6	7.1	8.2
		Heating*3)		1.7	2.5	3.2	4.0	5.0	6.3	8.0	8.5
Fan	Air Flow Rate	H/M/L (UL)	CMM	4.4/4.2/3.8	5.4/4.7/4.0	5.7/5/4.3	7.1/5.7/4.6	8.9/7.5/6.0	11.8/10.0/8.2	14.8/12.4/10.0	16.7/14.3/12.4
			l/s	73/70/63	90/78/67	95/83/72	118/95/77	148/125/100	197/167/137	247/207/167	279/238/207
Piping Connections	Liquid Pipe		Ø, inch	1/4						3/8	
	Gas Pipe		Ø, inch	1/2						5/8	
Fuse Rating				5A							
Sound	Sound Pressure	High/Mid/Low*4)	dBA	28/25/24	33/29/25	36/31/25	37/34/30	41/38/34	39/36/33	44/41/36	47/43/40
Dimensions	Net Weight		kg	7.9		8.0	9.6		14.5		
	Net Dimensions (WxHxD)		mm	750 x 249 x 246			826 x 261 x 261		1065 x 301 x 294		
Additional Accessories	Drain Pump	Drain Pump	-/Model	-							
		Max. Lifting Height / Displacement	mm/litre/h	-							
	Air Filter		-	Long life filter							
	Virus Doctor		-	Built in							


These products contain fluorinated greenhouse gas (R410A).

Virus Doctor


Our Virus Doctor eliminates airborne contaminants and creates even healthier air for your environments. This optional device can be easily installed by simply installing the Virus Doctor kit into the indoor unit.

The Virus Doctor device generates active hydrogen and oxygen ions which eliminate biological contaminants and active oxygen (OH-radical) in the air by turning them into harmless H_2O.

- Elimination of airborne virus and bacteria (subtype H1N1)
- Complete eradication of bacteria
- Relief of allergies by eradicating airborne allergens
- Neutralising of OH-radical (as known as active oxygen)

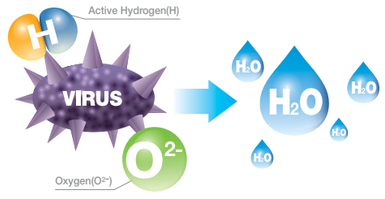

Virus and Active Hydrogen turns into harmless H_2O

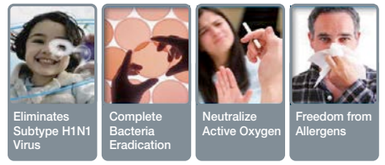


Cools faster, further and wider

The Samsung Air Conditioner has been designed from the ground up to be outstandingy efficient. Its uniquely triangular design has a wider intake, so more air can be drawn in. The improved width and angle of its outlet, extra v-blades and a bigger fan also ensure that air is cooled and expelled faster and further. So refreshingly cool air reaches every corner of your room without blind spots.




Wall (A3050-E) Dimensional Drawings | AM015/022/028/036/045/056/071/082JNVDKH

Units: mm

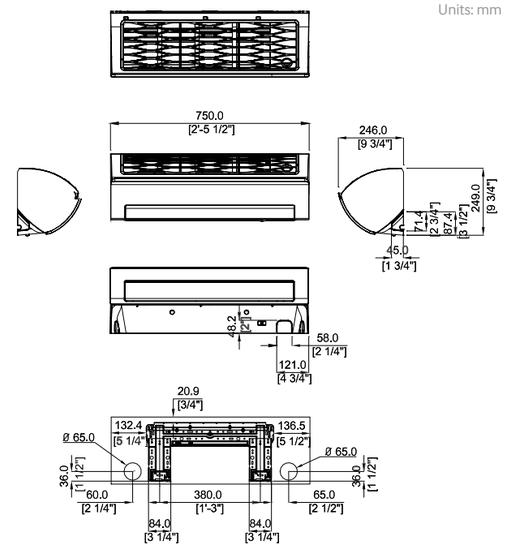


Models	AM015/022/028JNVDKH			
No.	Name	Description		
		1.5kW	2.2kW	2.8kW
1	Refrigerant gas pipe	Ø12.7 Flare		
2	Refrigerant liquid pipe	Ø6.35 Flare		
3	Drain pipe connection	ID18 Hose		

Models	AM036/045/028JNVDKH		
No.	Name	Description	
		3.6kW	4.5kW
1	Refrigerant gas pipe	Ø12.7 Flare	
2	Refrigerant liquid pipe	Ø6.35 Flare	
3	Drain pipe connection	ID18 Hose	

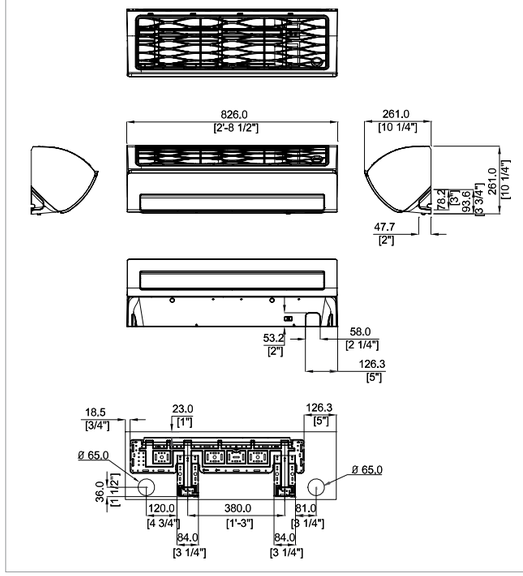

Models	AM056/071/082JNVDKH			
No.	Name	Description		
		5.6kW	7.1kW	8.2kW
1	Refrigerant gas pipe	Ø12.7 Flare	Ø15.88 Flare	
2	Refrigerant liquid pipe	Ø6.35 Flare	Ø9.52 Flare	
3	Drain pipe connection		ID 18 Hose	

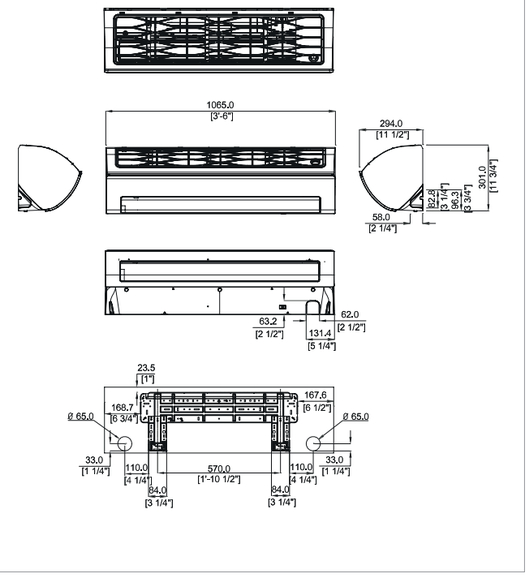

Floor **(uncased)** Specifications



Pre Filter

Model Name				AM036FNFDEH	AM056FNFDEH	AM071FNFDEH
Perfomance	Capacity (Nominal)	Cooling*2)	kW	3.6	5.6	7.1
		Heating*3)		4.0	6.3	8.0
Fan	Air Flow Rate	H/M/L (UL)	CMM	10.00/8.50/6.00	15.50/14.00/11.00	
			l/s	166/141/100	258/233/183	
Fan	Liquid Pipe		Ø, inch	1/4	3/8	
	Gas pipe			1/2	5/8	
Fuse Rating				5A		
Sound	Sound Pressure	High/Mid/Low*4)	dBA	37/32/27	40/36/32	
Dimensions	Net Weight		kg	23.0	28.5	
	Net Dimensions (WxHxD)		mm	945 x 600 x 220	1225 x 600 x 220	
Additional Accessories	Air Filter		-	Long life filter		


These products contain fluorinated greenhouse gas (R410A).

The Concealed Floor Standing Unit offers the utmost in versatility in solving your cooling and heating needs. This effectively adjusts its performance to meet the needs of spaces with a high ceiling and many windows whilst maintaining the desired temperature.

*Specifications may be subject to change without prior notice for product improvement.
*1) Mode - HP : Heat Pump, HR : Heat Recovery.
*2) Nominal cooling capacities are based on; -Indoor temperature : 27°C DB, 19°C WB -Outdoor temperature : 35°C DB, 24°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*3) Nominal heating capacities are based on; -Indoor temperature : 20°C DB, 15°C WB -Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m.
*4) Sound pressure was acquired in an anechoic room. Thus, actual noise level may be different depending on the installation conditions.

Floor **(uncased)** Dimensional Drawing

Units: mm

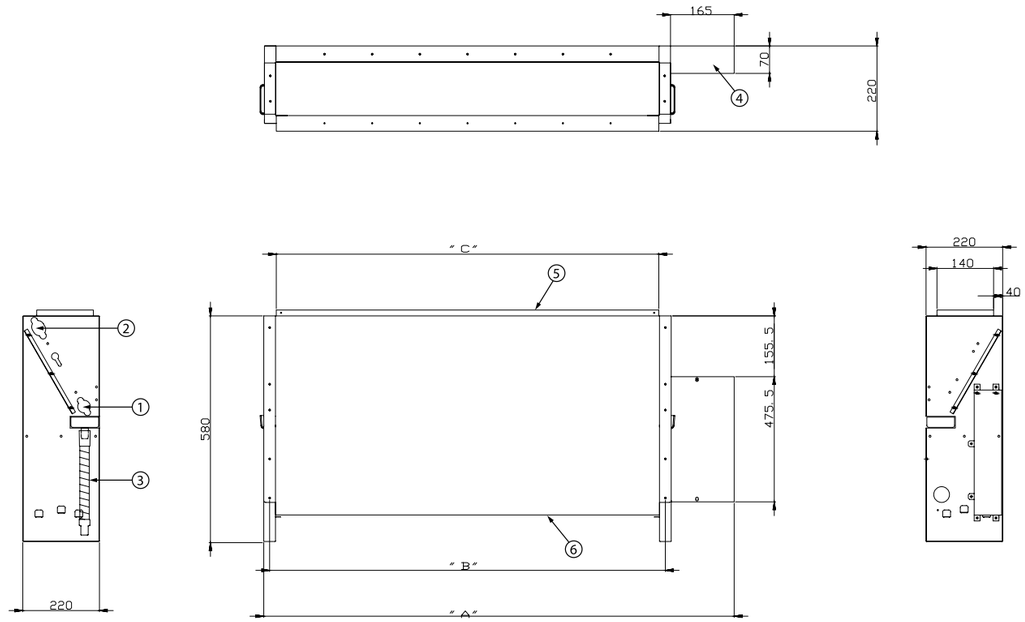

Model	A	B	C
AM036FNFDEH	945	730	700
AM056/071FNFDEH	1,225	1,010	980

No.	Name	Description		
		3.6kW	5.6kW	7.1kW
1	Liquid pipe connection	Ø6.35 Flare	Ø6.35 Flare	Ø9.52 Flare
2	Gas pipe connection	Ø12.70 Flare	Ø12.70 Flare	Ø15.88 Flare
3	Drain pipe connection	ID18 Hose		
4	Power wiring	-		
5	Air inlet grille	-		
6	Air outlet louver	-		

Hydro Unit Specifications



50°C or 80°C Hot Water Supply

Model Name				AM160FNBDEH	AM320FNBDEH	AM500FNBDEH	AM160FNBFEB	AM250FNBFEB
Type				HE (50°C)	HE (50°C)	HE (50°C)	HT (80°C)	HT (80°C)
Performance	Nominal Capacity	Heating*1)	kW	16.0	31.5	50.4	16.0	25.0
		Cooling*2)		14.0	28.0	44.8	-	
	Required Flow Rate (Min~Max)		LPM	48	92	150	23	36
	Flow Switch			20	30	50	12	12
	Piping Connections	In/Out	Ø,,inch	1		11/4	1	1
Refrigerant Side	Piping Connections	Liquid	Ø,,inch	3/8		1/2	3/8	
		Gas		5/8	7/8	1.1/8	5/8	
Sound	Sound Pressure*3)	Heating	dB(A)	26.	27.	30.	42.	
		Cooling		27.	28.	31.	-	
External. Dimension	Weight	Net	kg	29	33	40	104	
	Dimensions. (WxHxD)	Net	mm	518 x 627 x 330			518 x 1,210 x 330	
Compressor	Refrigerant	Type	-	-			R-134a	R-134a
		Factory Charging	g	-				
Electric Specification	MCA		A	2.2			24.15	32.15
	Fuse Rating			5			30	40
Operating Range	Leaving Water	Heating	℃	20~50			25~80	
		Cooling		5~30			-	


These products contain fluorinated greenhouse gas (R410A) – Hydro HT (R134a).


DVM Hydro Unit HE (High Efficiency) – hot water up to 50°C

- Heat pump and Heat recovery (simultaneous cooling and heating) system
- Air-to-water heating and cooling
- Consist of DVM outdoor units and hydro unit
- Cassette-type indoor units are compatible for air-to-air solution
- Compatible with under floor heating and fan coil units
- Water temperature up to 50°C
- Integrated control system

DVM Hydro Unit HT (High Temperature) – hot water up to 80°C

- Heat pump and Heat recovery (simultaneous cooling and heating) system
- Air-to-water heating
- Consist of DVM outdoor units, hydro unit and DHW tank
- Cassette type indoor units are compatible for air-to-air solution
- Compatible with under floor heating and fan coil units
- Water temperature up to 80°C
- Integrated control system

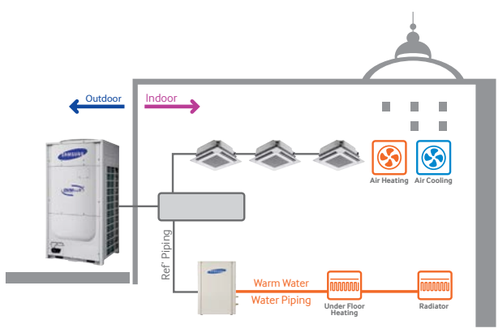


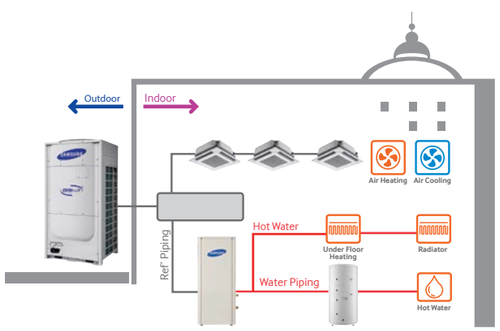



*Specifications may be subject to change without prior notice for product improvement.
*1) Nominal heating capacities are based on; - Water inlet/outlet temperature : 30°C/35°C; - Outdoor temperature : 7°C DB, 6°C WB
*2) Nominal cooling capacities are based on; - Water inlet/outlet temperature : 23°C/18°C; - Outdoor temperature : 35°C DB
*3) Sound pressure was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

Hydro Unit Dimensional Drawing | AM160/320/500FNBDEH, AM160/250FBNF*B


Units: mm







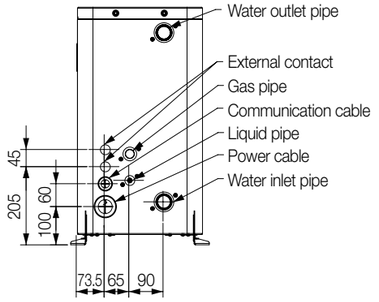


Model		AM160FNBDEH	AM320FNBDEH	AM500FNBDEH
Refrigerant side	Liquid pipe	3/8" (ø9.52)		1/2" (ø12.7)
	Gas pipe	5/8" (ø15.88)	7/8" (ø22.23)	1-1/8" (ø28.58)
Water side	Water inlet/outlet pipe	PT 1 (25 A)		PT 1-1/4 (32 A)



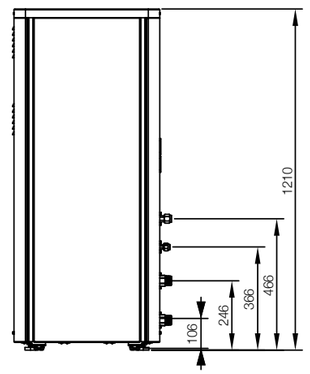

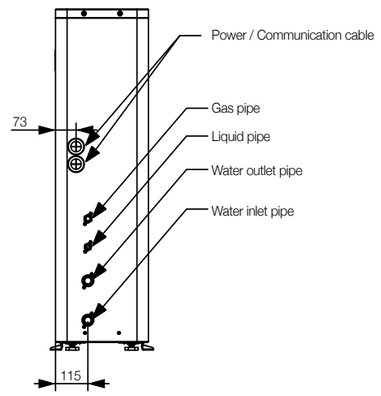




Model		AM160/250FBNF*B
Refrigerant side	Liquid pipe	3/8" (ø9.52)
	Gas pipe	5/8" (ø15.88)
Water side	Water inlet/outlet pipe	PT 1 (25 A)

Mode Control Unit (MCU)



Simultaneous Cooling and Heating

Indoor units connected to a 3-pipe Heat Recovery outdoor unit can independently heat and cool utilising a Mode Control Unit (MCU). MCUs are available in 4 or 6-port configurations and can be piped together, allowing up to 80 indoor unit connections to a single DVM S system (where specifications allow).

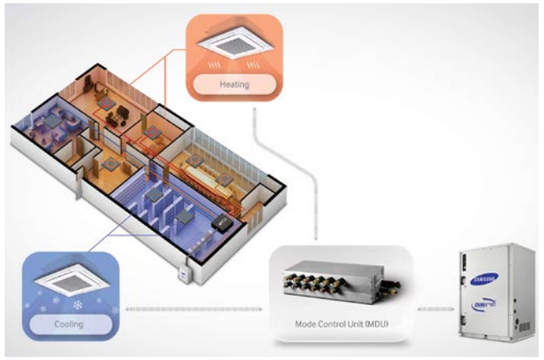




MCU indoor/outdoor unit compatible table

Before installing MCU, refer to the compatible table below and find the model before installation.

Each MCU requires a 220–240V 1-phase power supply and a drain connection.

	Model	Description
MCU Kit	MCU-S6NEE1N	Below 6 indoor units, below 56 kW (192MBH)
	MCU-S4NEE1N	Below 4 indoor units, below 56 kW (192MBH)
	MCU-S4NEE2N	Below 2 large capacity indoor unit, below 56 kW (192MBH)


MCU Specification and Installation

Model Name	MCU-S6NEE1N	MCU-S4NEE1N	MCU-S4NEE2N
Exterior of MCU			
Number of connectable indoor units	Up to 6 units	Up to 4 units	Up to 2 units. *Refer to the detailed information of installation
Maximum capacity of connectable indoor units	56 kW		
Installation	Only units ≤14kW cooling can be connected to these MCUs Only units <10kW cooling can be directly connected to one port (liquid and gas pipe) Units with capacity 11.2kW to 14kW must utilise two connection ports via Y-branch connector		Only units ≥11.2kW can be connected to these MCUs Single units with capacity 11.2kW to 28kW must utilise two connection ports via Y-branch connector


MCU Dimensional Drawings | MCU-Y4NEE1N/MCU-Y6NEE1N

Units: mm


MCU-Y4NEE1N
Weight: 26kg

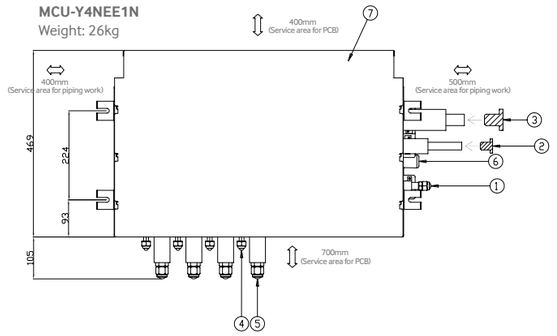


Models	MCU-Y4NEE1N/MCU-Y6NEE1N
No.	Description
1	Liquid pipe connection from outdoor unit (Flare)
2	High pressure gas pipe connection from outdoor unit (Brazing)
3	Gas pipe connection from outdoor unit (Flange)
4	Liquid pipe connection to indoor units
5	Gas pipe connection to indoor units
6	Condensate drain pipe connection
7	Power and communication wiring conduits

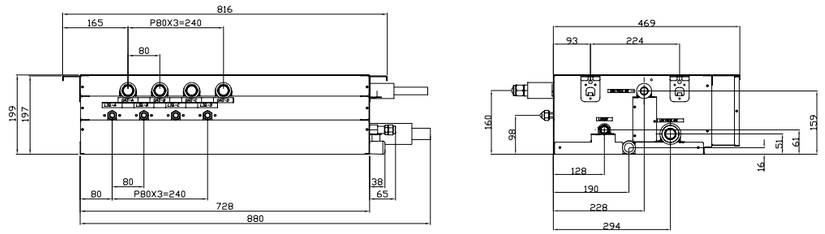

MCU-Y6NEE1N
Weight: 28kg

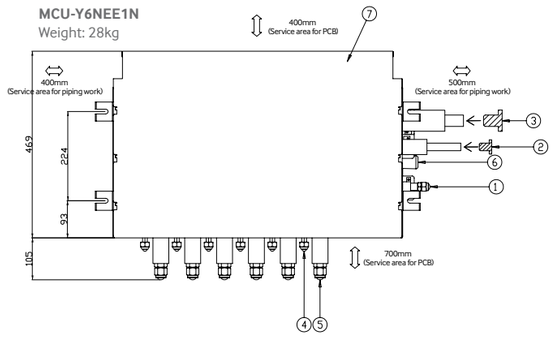

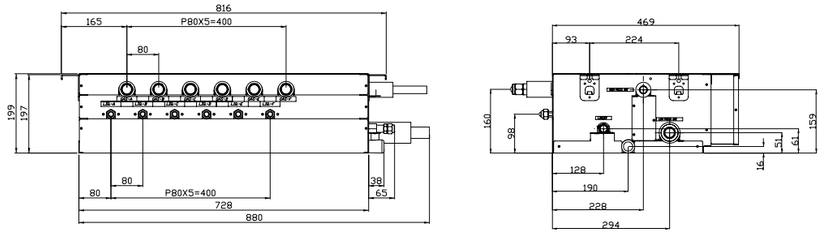

Outdoor Units Line-up

	DVM S 52. Heat Recovery 56. Heat Pump 60. Heat Pump Std 2-pipe Heat Pump (HP) or 3-pipe Heat Recovery (HR)	Model	Capacity		Single								Module				
				HP	8	10	12	14	16	18	20	22	24	26	28	30	32
				Cooling	22.4kW	28.0kW	33.6kW	40.0kW	45.0kW	50.4kW	56.0kW	61.6kW	67.2kW	73.6kW	78.6kW	84.0kW	89.6kW
				Max. kW Capacity	29.12	36.4	43.7	52.0	58.5	65.52	72.8	80.08	87.4	95.7	102.2	109.2	116.5
				Max. no. Indoors	14	18	21	26	29	32	36	40	43	47	51	54	58
Outdoor Units		AM080JXVHGH	8 HP		1												
		AM100JXVHGH	10 HP			1											
		AM120JXVHGH	12 HP				1						2	1	1	1	1
		AM140JXVHGH	14 HP					1						1			
		AM160JXVHGH	16 HP						1						1		
		AM180JXVHGH	18 HP							1						1	
		AM200JXVHGH	20 HP								1						1
		AM220JXVHGH	22 HP									1					
		AM240HXVAGH	24 HP										1				
		AM260HXVAGH	26 HP											1			

		Model	Capacity		Module																																	
				HP	34	36	38	40	42	44	46	48	50	52	54	56	58	60	62	64	66	68	70	72	74	76	78	80
				Cooling	95.2kW	101.6kW	106.6kW	112.0kW	117.6kW	123.2kW	128.8kW	135.2kW	140.2kW	145.6kW	151.2kW	156.8kW	163.2kW	168.2kW	173.6kW	179.2kW	184.8kW	190.4kW	196.8kW	201.8kW	207.2kW	212.8kW	218.4kW	224.8kW
				Max. kW Capacity	123.8	132.1	138.6	145.6	152.9	160.2	167.4	175.8	182.3	189.3	196.6	203.8	212.3	218.7	225.7	233	240.2	247.5	255.8	262.3	269.4	276.6	283.9	292.2
				Max. no. Indoors	61	66	69	72	76	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80
Outdoor Units		AM080JXVHGH	8 HP																										
		AM100JXVHGH	10 HP																										
		AM120JXVHGH	12 HP		1						2	1	1	1	1	1						2	1	1	1	1	1	
		AM140JXVHGH	14 HP			1						1					1						1					1
		AM160JXVHGH	16 HP				1						1					1						1				
		AM180JXVHGH	18 HP											1										1				
		AM200JXVHGH	20 HP					2	1						1			2	1							1		
		AM220JXVHGH	22 HP		1	1	1		1	2	1	1	1	1	1	2	2	2	1	2	3	2	2	2	2	2	3	3
		AM240HXVAGH	24 HP																									
		AM260HXVAGH	26 HP																									

*Please check Eurovent website to confirm exact model certification.


	62. DVM S Water	Phase		Capacity			
			HP	8	10	12	20
			Cooling	22.4kW	22.0kW	33.6kW	56.0kW
			Max. kW Capacity	29.12	36.4	43.7	72.8
			Max. no. Indoors	14	18	21	36
Outdoor Units		3 Phase		AM080FXWANR	AM100FXWANR	AM120FXWANR	
		3 Phase					AM200FXWANR

	66. DVM S Eco	Phase		Capacity			
			HP	4	5	6	8
			Cooling	11.2kW	14.0kW	15.5kW	22.4kW
			Max. kW Capacity	14.5	18.2	20.2	29.12
			Max. no. Indoors	6	8	9	17
Outdoor Units		1 Phase		AM040FMXDEH	AM050FMXDEH	AM060FMXDEH	
		3 Phase		AM040FMXDGH	AM050FMXDGH	AM060FMXDGH	AM080FMXDGH


These products contain R410A refrigerant which has a GWP>150.

Auto Oil Balancing

Samsung DVM S ensures stable and equal oil balancing without requiring an extra oil balancing pipe.

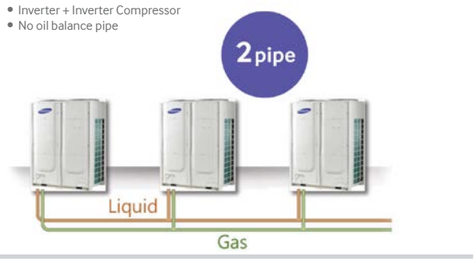

DVM S

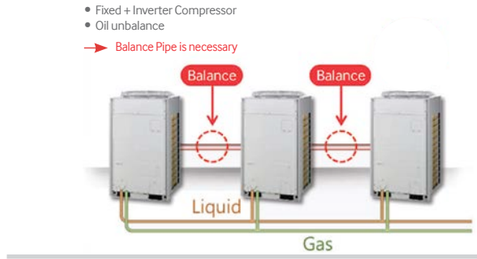


Conventional

PCB Refrigerant Cooling System

By utilising a small amount of refrigerant to cool the PCBs, DVM S ensures better stability than conventional air cooling.

DVM S
Refrigerant Cooling Method



Conventional
Air Cooling Method



VRF OUTDOOR UNITS

DVM S Heat Recovery High Efficiency

Specifications






Model Name				AM080JXVHGR	AM100JXVHGR	AM120JXVHGR	AM140JXVHGR		AM160JXVHGR	AM180JXVHGR	AM200JXVHGR	AM220JXVHGR
Power Supply			Φ, ⌀, V, Hz	3,4,380-415,50					3,4,380-415,50			
Mode			-	HEAT RECOVERY					HEAT RECOVERY			
Performance	HP		HP	8.00	10.00	12.00	14.00		16.00	18.00	20.00	22.00
	Capacity (Nominal)	Cooling	kW	22.40	28.00	33.60	40.00		45.00	50.40	56.00	61.60
		Heating		25.20	31.50	37.80	45.00		50	56.70	63.00	69.30
	ESEER			8.00	7.43	7.23	7.12		6.82	6.71	6.66	6.32
	EER			4.88	4.50	4.44	3.79		4.12	4.38	4.29	3.91
	COP			5.49	5.35	5.00	4.63		4.69	4.88	4.81	4.37
Power	Power Input (Nominal)	Cooling [1]	kW	4.59	6.22	7.57	10.55		10.92	11.51	13.05	15.75
		Heating [2]		4.59	5.89	4.56	9.72		10.75	11.62	13.1	15.86
	Max. Current		A	22.5	29.9	31.3			40.0	48.9	52.5	55.6
	Fuse Rating			30	40				40	50	75	
Fan	Air Flow Rate		CMM	170		220	255		255	290		
			l/s	2833		3667	4250		4250	4833		
	External Static Pressure	Max.	mmAq	8.00					8.00			
			Pa	78.45					78.45			
Piping Connections	Liquid Pipe		Φ, inch	3/8		1/2			1/2	5/8		
	Gas Pipe			3/4	7/8	1 1/8			1 1/8			
	Discharge Gas Pipe			5/8	3/4		7/8		7/8	1 1/8		
	Installation Limitation	Max. Length	m	200(220)					200(220)			
		Max. Height		110(40)					110(40)			
Refrigerant	Type		-	R410A					R410A			
	Factory Charging		kg	6.5	6.5	6.5	7.7		7.7	8.4	8.40	
Sound [3]	Sound Pressure		dB(A)	57	58	62	61		62	63	64	65
	Sound Power			77	79	81			82	85	86	88
External Dimension	Net Weight		kg	206			241		284.0	306.0		
	Net Dimensions (WxHxD)		mm	880 x 1,695 x 765			1,295 x 1,695 x 765		1,295 x 1,695 x 765			
Operating Temp. Range	Cooling		°C	-15 ~ 48					-15 ~ 48			
	Heating			-25.0 ~ 24.0					-25.0 ~ 24.0			

These products contain fluorinated greenhouse gas (R410A).

Small Footprint and Lighter Weight

Large unit capacity (22HP) facilitates the economical installation with a smaller footprint and lighter weight, making it the perfect fit for larger buildings.



Versatile Piping Connection with Various Knock-Out Holes

The knock-out holes for piping, power and communication cables are located in a variety of directions, allowing for more convenient installation of DVM S since the piping and cable direction can be freely selected from the front, left and right side.



If outdoor unit is located in a higher position than indoor unit, level difference is 110m or under. (If the level difference is higher than 50m, make a decision simulating by PDM kit installation Guide software whether the PDM kit should be installed or not.) *PDM kit: Pressure Drop Modulation kit

1) Nominal cooling capacities are based on; Indoor temperature : 27°C DB, 19°C WB/Outdoor temperature : 35°C DB, Equivalent refrigerant piping : 7.5m , Level differences : 0m


2) Nominal heating capacities are based on; Indoor temperature : 20°C DB, 15°C WB/Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m

3) Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

DVM S Heat Recovery
High Efficiency


Dimensional Drawings | AM080/100/120JXVHGR

Units: mm

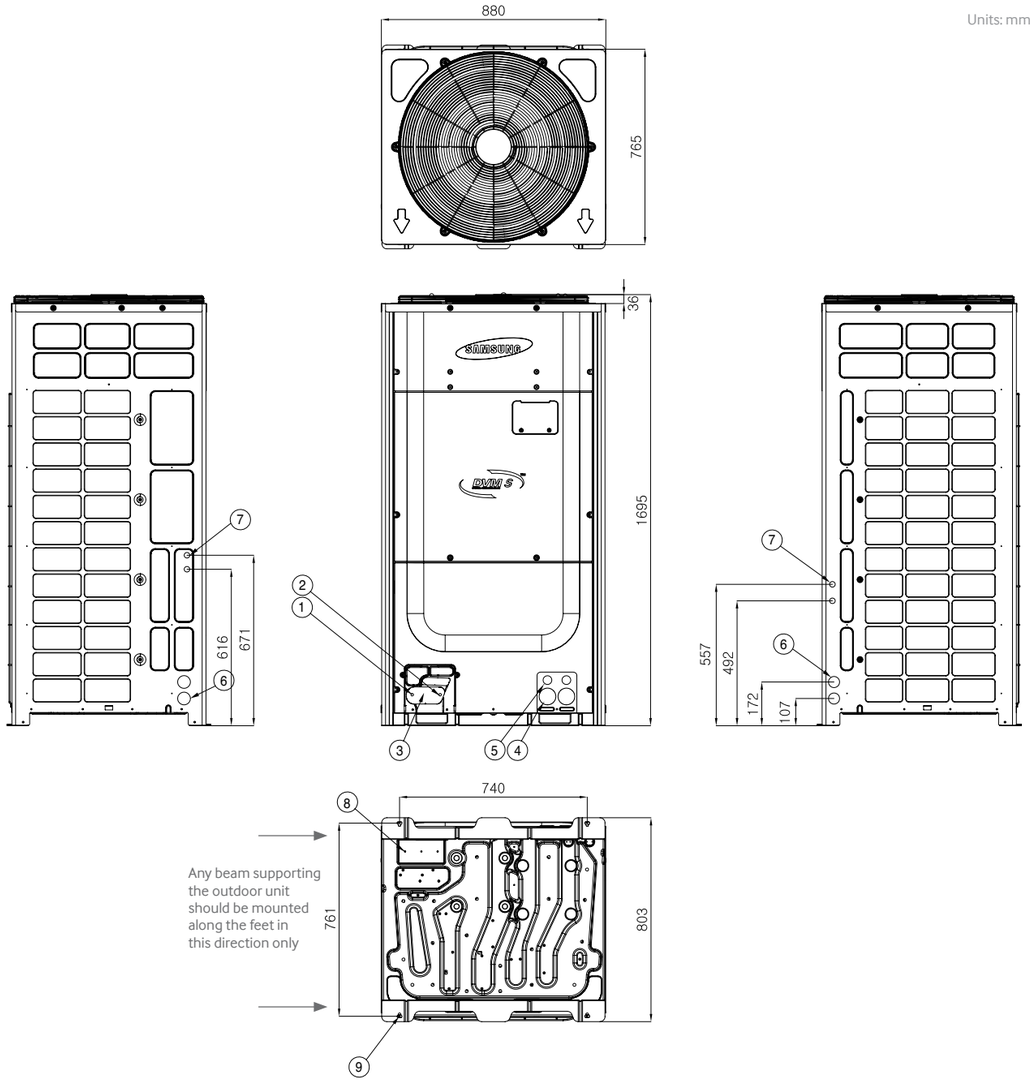


No.	Name	Description
1	Low pressure gas ref. pipe	-
2	High pressure gas ref. pipe	-
3	Liquid ref. pipe	-
4	Power wiring conduit	2 - Ø43.7
5	Communication wiring conduit	2 - Ø34.5
6	Power wiring conduit	4 - Ø43.7
7	Communication wiring conduit	8 - Ø22.0
8	Knock-out hole for ref. piping	178 x 76
9	Anchor bolt hole	4 - Ø12

Single Installation

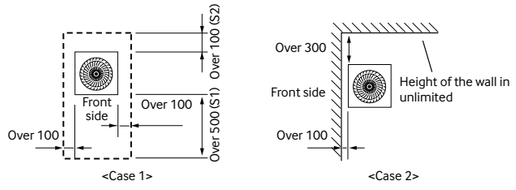


AM140/160/180/200/220JXVHGR

Units: mm

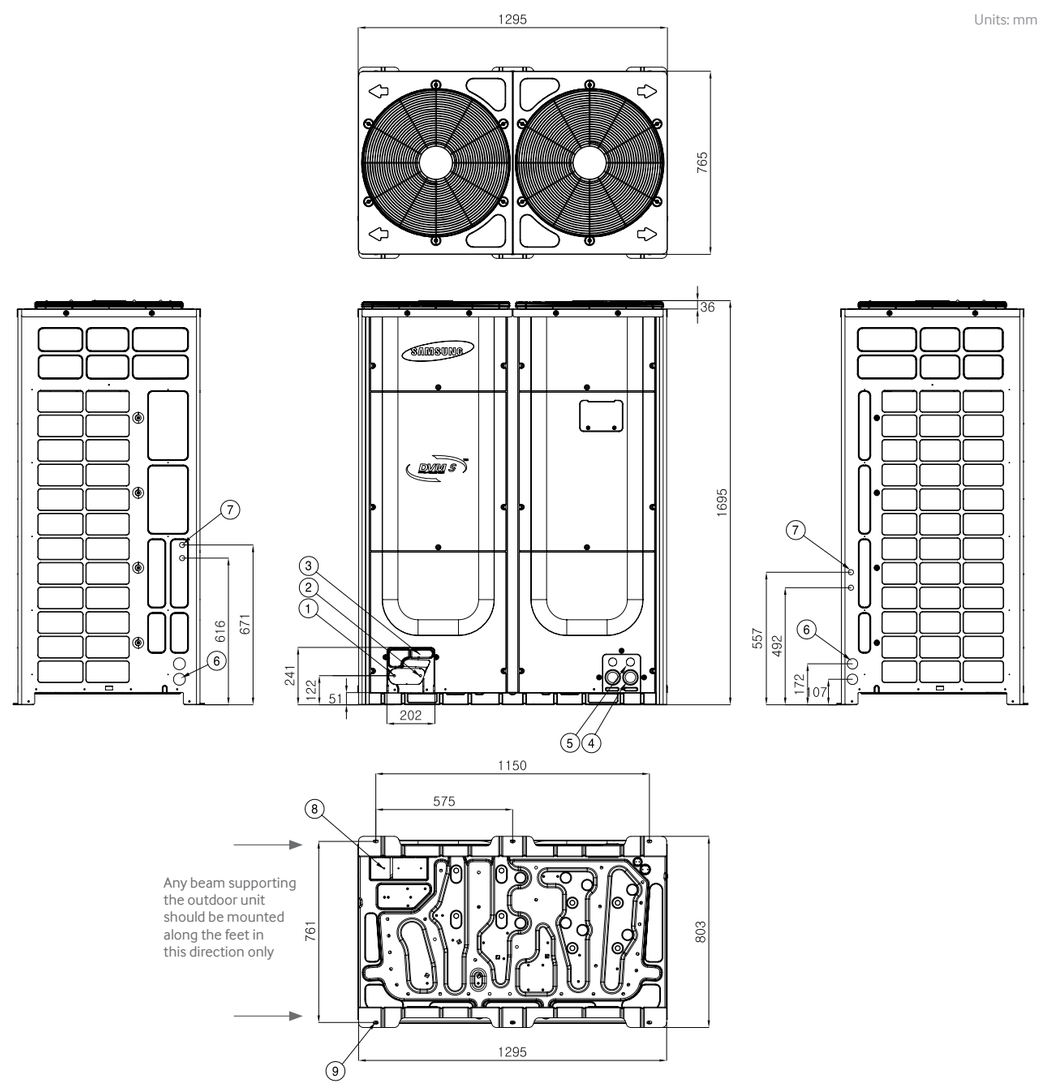

No.	Name	Description
1	Low pressure gas ref. pipe	-
2	High pressure gas ref. pipe	-
3	Liquid ref. pipe	-
4	Power wiring conduit	2 - Ø43.7
5	Communication wiring conduit	2 - Ø34.5
6	Power wiring conduit	4 - Ø43.7
7	Communication wiring conduit	8 - Ø22.0
8	Knock-out hole for ref. piping	178 x 76
9	Anchor bolt hole	4 - Ø12

Module Installation

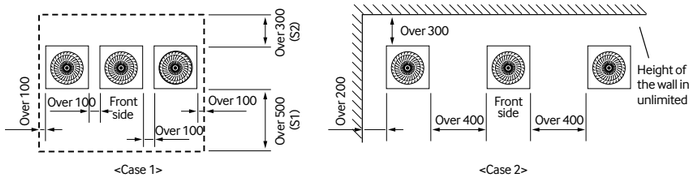

VRF OUTDOOR UNITS

DVM S Heat Pump High Efficiency

Specifications






Model Name				AM080JXVHGH	AM100JXVHGH	AM120JXVHGH	AM140JXVHGH		AM160JXVHGH	AM180JXVHGH	AM200JXVHGH	AM220JXVHGH
Power Supply			Φ, ⌗, V, Hz	3,4,380-415,50					3,4,380-415,50			
Mode			-	HEAT PUMP					HEAT PUMP			
Performance	HP		HP	8.00	10.00	12.00	14.00		16.00	18.00	20.00	22.00
	Capacity (Nominal)	Cooling	kW	22.40	28.00	33.60	40.00		45.00	50.40	56.00	61.60
		Heating		25.20	31.50	37.80	45.00		50.4	56.70	63.00	69.30
	ESEER			8.00	7.43	7.23	7.12		6.82	6.71	6.66	6.32
	EER			4.88	4.50	4.44	3.79		4.12	4.38	4.29	3.91
	COP			5.49	5.35	5.00	4.63		4.69	4.88	4.81	4.37
Power	Power Input (Nominal)	Cooling [1]	kW	4.59	6.22	7.57	10.55		10.92	11.51	13.05	15.75
		Heating [2]		4.59	5.89	4.56	9.72		10.75	11.62	13.1	15.86
	Max. Current		A	22.5	29.9	31.3			40.0	48.9	52.5	55.6
	Fuse Rating			30	40				40	50	75	
Fan	Air Flow Rate		CMM	170		220	255		255	290		
			l/s	2,833		3,667	4,250		4,250	4,833		
	External Static Pressure	Max.	mmAq	8.00					8.00			
			Pa	78.45					78.45			
Piping Connections	Liquid Pipe		Φ, inch	3/8		1/2			1/2	5/8		
	Gas Pipe			3/4	7/8	1 1/8			1 1/8			
	Installation Limitation	Max. Length	m	200(220)					200(220)			
		Max. Height		110(40)					110(40)			
Refrigerant	Type		-	R410A					R410A			
	Factory Charging		kg	6.5	6.5	6.5	7.7		7.7	8.4	8.40	
Sound [3]	Sound Pressure		dB(A)	57	58	62	61		62	63	64	65
	Sound Power			77	79	81			82	85	86	88
External Dimension	Net Weight		kg	206			241		278.0	300.0		
	Net Dimensions (WxHxD)		mm	880 x 1,695 x 765			1,295 x 1,695 x 765		1,295 x 1,695 x 765			
Operating Temp. Range	Cooling		°C	-5.0 ~ 48.0					-5.0 ~ 48.0			
	Heating			-25.0 ~ 24.0					-25.0~ 24.0			

These products contain fluorinated greenhouse gas (R410A).


Optimised Refrigerant Distribution Control

Since piping distance can be considerable between outdoor and indoor units, the individual indoor units perform capacity connection control and automatic refrigerant balancing to secure balanced performance between the units.

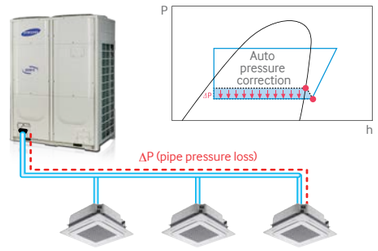


Refrigerant Pump-down and Pump-out

DVM S provides the refrigerant pump-down/out functions to facilitate easy and convenient replacement of the product, as well as additional installations and maintenance. In case of outdoor unit maintenance, it is possible for the refrigerant to recover into indoor units and pipes. It is also possible to recover refrigerant into outdoor units when moving indoor units or performing maintenance on pipes.

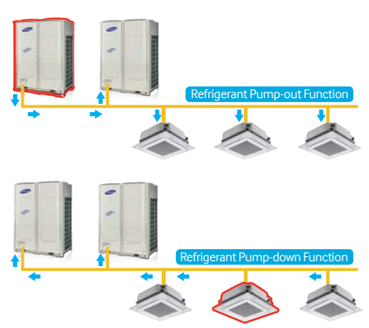

High External Static Pressure

To properly deal with unexpected and varying installation conditions, DVM S is designed to manage high external static pressures up to 78.45 Pa.




If outdoor unit is located in a higher position than indoor unit, level difference is 110m or under. (If the level difference is higher than 50m, make a decision simulating by PDM kit installation Guide software whether the PDM kit should be installed or not.) *PDM kit: Pressure Drop Modulation kit
1) Nominal cooling capacities are based on; Indoor temperature : 27°C DB, 19°C WB/Outdoor temperature : 35°C DB, Equivalent refrigerant piping : 7.5m , Level differences : 0m
2) Nominal heating capacities are based on; Indoor temperature : 20°C DB, 15°C WB/Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m"
3) Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

VRF OUTDOOR UNITS

DVM S Heat Pump
High Efficiency


Dimensional Drawings | AM080/100/120JXVHGH

Units: mm

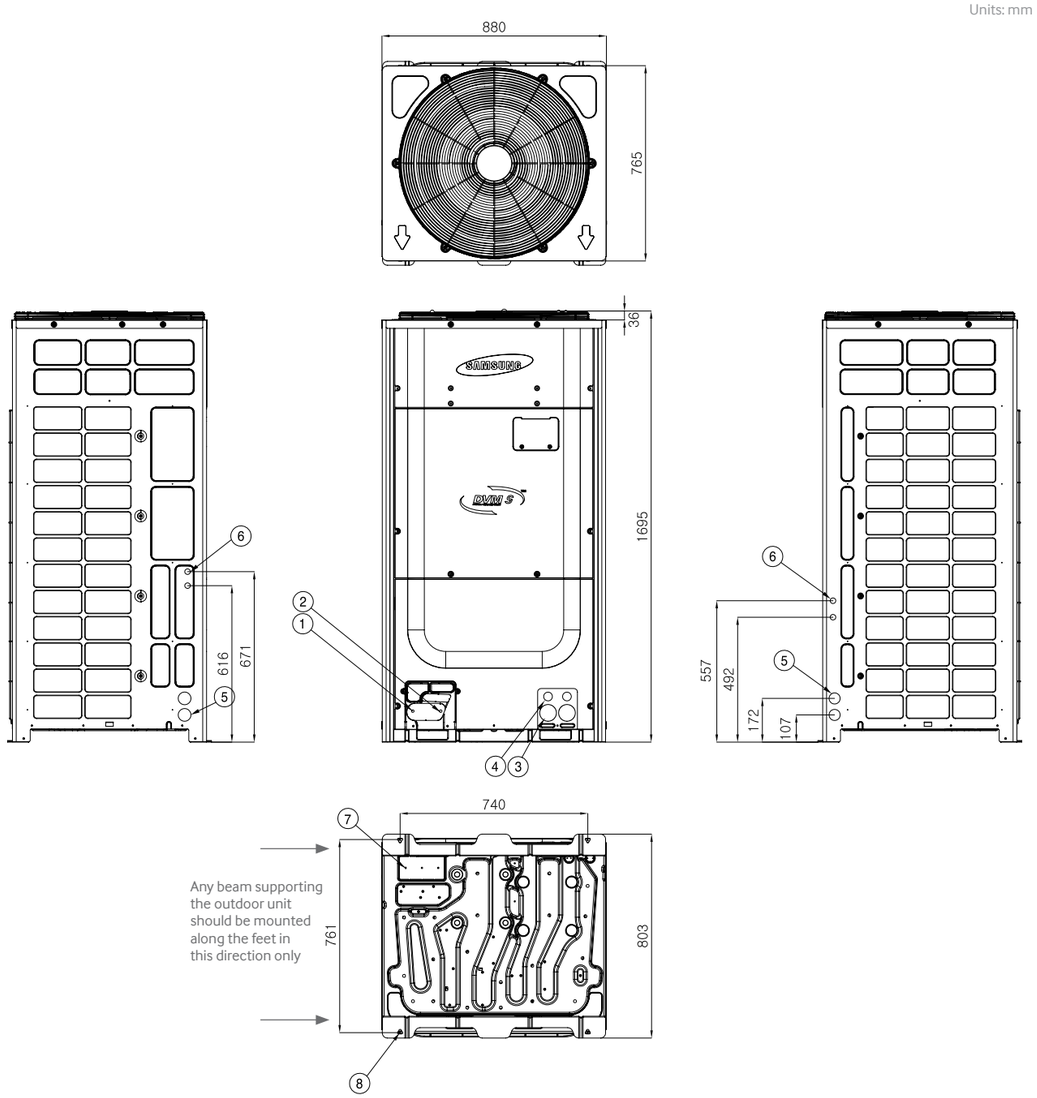


No.	Name	Description
1	Gas ref. pipe	-
2	Liquid ref. pipe	-
3	Power wiring conduit	2 - Ø43.7
4	Communication wiring conduit	2 - Ø34.5
5	Power wiring conduit	4 - Ø43.7
6	Communication wiring conduit	8 - Ø22.0
7	Knock-out hole for ref. piping	178 x 76
8	Anchor bolt hole	4 - Ø12

Single Installation

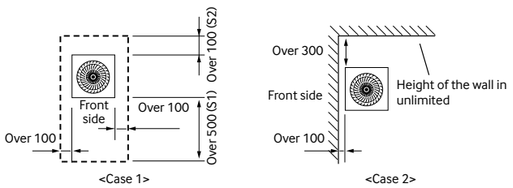


AM140/160/180/200/220/240/260JXVHGH

Units: mm

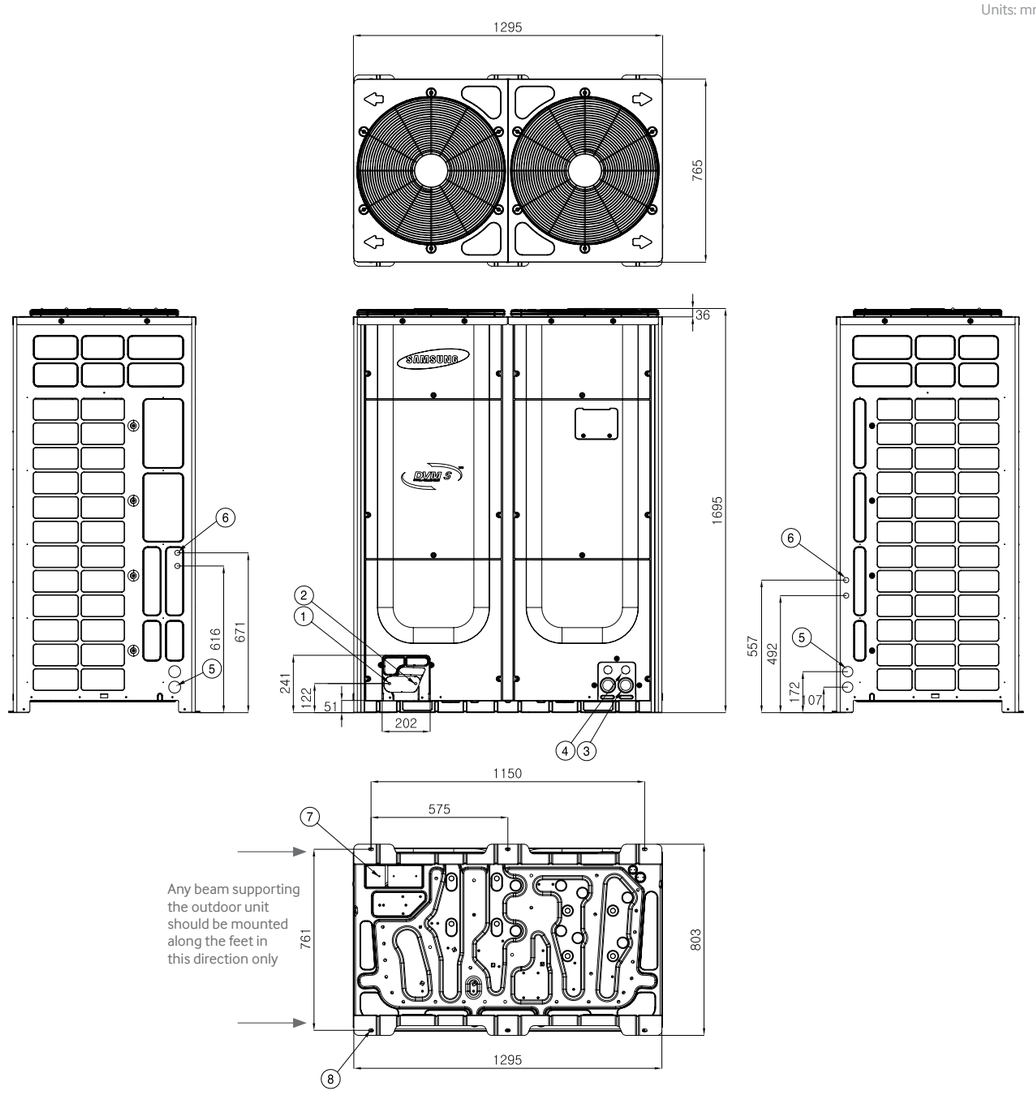

No.	Name	Description
1	Gas ref. pipe	-
2	Liquid ref. pipe	-
3	Power wiring conduit	2 - Ø43.7
4	Communication wiring conduit	2 - Ø34.5
5	Power wiring conduit	4 - Ø43.7
6	Communication wiring conduit	8 - Ø22.0
7	Knock-out hole for ref. piping	178 x 76
8	Anchor bolt hole	4 - Ø12

Module Installation

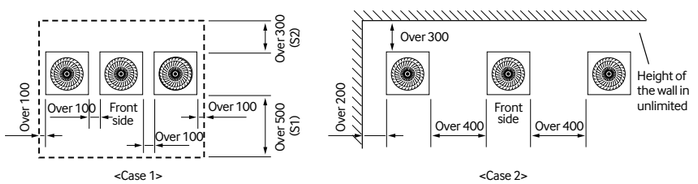

DVM S Heat Pump Standard

Specifications






Model Name				AM080JXVAGH	AM100JXVAGH	AM120JXVAGH	AM140JXVAGH	AM160JXVAGH		AM180JXVAGH	AM200JXVAGH	AM220JXVAGH	AM240HXVAGH	AM260HXVAGH
Power Supply			Φ, ⌀, V, Hz	3,4,380-415,50						3,4,380-415,50				
Mode			-	HEAT PUMP						HEAT PUMP				
Performance	HP		HP	8.00	10.00	12.00	14.00	16.00		18.00	20.00	22.00	24.00	26.00
	Capacity (Nominal)	Cooling	kW	22.40	28.00	33.60	40.00	45.00		50.40	56.00	61.60	67.20	72.80
		Heating		25.20	31.50	37.80	45.00	50.4		56.70	63.00	69.30	75.60	81.90
	ESEER			7.85	7.25	7.03	7.02	6.78		4.05	6.56	6.25	6.48	6.26
	EER			4.48	4.09	4.12	3.66	3.76		4.76	3.84	3.55	3.93	3.77
	COP			4.94	4.74	4.71	4.43	4.34		12.45	4.53	4.15	3.82	3.76
Power	Power Input (Nominal)	Cooling [1]	kW	5.00	6.85	8.16	10.93	11.98		12.88	14.59	17.35		
		Heating [2]		5.10	6.65	8.03	10.15	11.60		11.90	13.90	16.70		
	Max. Current		A	22.5	29.9	31.3		40.0		48.9	52.5	55.6	60.5	63.8
	Fuse Rating			30		40				50	75			
Fan	Air Flow Rate		CMM	170		220	255			290			310	
			l/s	2,833		3,667	4,250			4833			5167	
	External Static Pressure	Max.	mmAq	8.00						8.00				
			Pa	78.45						78.45				
Piping Connections	Liquid Pipe		Φ, inch	3/8		1/2				5/8				
	Gas Pipe			3/4	7/8	1 1/8				1 1/8			1 3/8	
	Installation Limitation	Max. Length	m	200(220)						200(220)				
		Max. Height		110(40)						110(40)				
Refrigerant	Type		-	R410A						R410A				
	Factory Charging		kg	5.50		6.5	7.7	7.7		8.4	8.40		14.3	
Sound [3]	Sound Pressure		dB(A)	57	58	62	61	63		64	65	67	67	
	Sound Power			77	79	81		83		86	87	89	91	
External Dimension	Net Weight		kg	186	197	210	239	269		307			360	
	Net Dimensions (WxHxD)		mm	880 x 1,695 x 765			1,295 x 1,695 x 765	1,295 x 1,695 x 765		1,295 x 1,695 x 765				
Operating Temp. Range	Cooling		°C	-5.0 ~ 48.0						-5.0 ~ 48.0				
	Heating			-25.0 ~ 24.0						-25.0 ~ 24.0				

These products contain fluorinated greenhouse gas (R410A).


Optimised Refrigerant Distribution Control

Since piping distance can be considerable between outdoor and indoor units, the individual indoor units perform capacity connection control and automatic refrigerant balancing to secure balanced performance between the units.

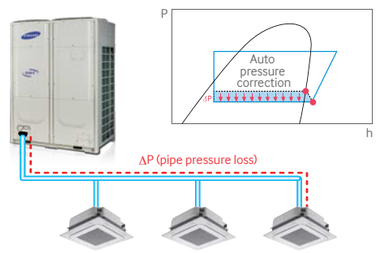


Refrigerant Pump-down and Pump-out

DVM S provides the refrigerant pump-down/out functions to facilitate easy and convenient replacement of the product, as well as additional installations and maintenance. In case of outdoor unit maintenance, it is possible for the refrigerant to recover into indoor units and pipes. It is also possible to recover refrigerant into outdoor units when moving indoor units or performing maintenance on pipes.

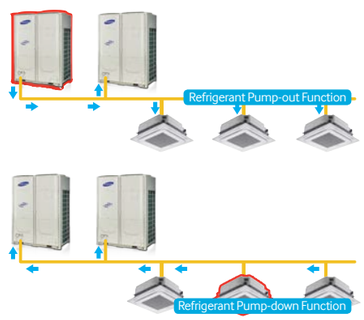

High External Static Pressure

To properly deal with unexpected and varying installation conditions, DVM S is designed to manage high external static pressures up to 78.45 Pa.



If outdoor unit is located in a higher position than indoor unit, level difference is 110m or under. (If the level difference is higher than 50m, make a decision simulating by PDM kit installation Guide software whether the PDM kit should be installed or not.) *PDM kit: Pressure Drop Modulation kit

1) Nominal cooling capacities are based on; Indoor temperature : 27°C DB, 19°C WB/Outdoor temperature : 35°C DB, Equivalent refrigerant piping : 7.5m , Level differences : 0m

2) Nominal heating capacities are based on; Indoor temperature : 20°C DB, 15°C WB/Outdoor temperature : 7°C DB, 6°C WB, Equivalent refrigerant piping : 7.5m, Level differences : 0m"

3) Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

DVM S Water Specifications



Model Name				AM080FXWANR	AM100FXWANR	AM120FXWANR	AM200FXWANR
Power Supply			Φ, ※, V, Hz	3,4,380-415,50/60			
Mode			-	HEAT PUMP AND HEAT RECOVERY			
Performance	HP		HP	8.00	10.00	12.00	20.00
	Capacity (Nominal)	Cooling	kW	22.40	28.00	33.60	56.00
		Heating		25.20	31.50	37.80	63.00
	EER			5.83	5.54	5.20	
	COP			6.12	6.00	5.81	5.80
Power	Power Input (Nominal)	Cooling [1]	kW	3.84	5.05	6.46	8.89
		Heating [2]		4.12	5.25	6.51	9.37
	Max. Current		A	16.30 (MCA)	20.00 (MCA)	25.00 (MCA)	36.30 (MCA)
	Fuse Rating			20		32	40
COP	Nominal Cooling [1]		-	5.83	5.54	5.20	5.67
	Nominal Heating [2]		-	6.12	6.00	5.81	6.05
Condenser	Type		-	PHE(Stainless Steel Plate)			
	Pipe Size		Φ, inch	PT 1-1/4			PT 1-1/4 x 2
	Lost Head		kPa	22.0	30.0	43.0	54.0
	Water Flow Rate		LPM	80.0	96.0	114.0	190.0
	Max. Pressure		Mpa	1.96			
Piping Connections	Liquid Pipe		Φ, inch	3/8		1/2	5/8
	Discharge Gas Pipe			5/8	3/4		1 1/8
	Gas Pipe			3/4	7/8	1 1/8	
	Installation Limitation	Max. Length	m	170(190)			
		Max. Height		50.0(40.0)			
Refrigerant	Type		-	R410A			
	Factory Charging		kg	5.50	5.80	6.00	9.80
Sound [3]	Sound Pressure		dB(A)	48.0		50.0	51.0
	Sound Power			70.0			73.0
External Dimension	Net Weight		kg	160.0			240.0
	Net Dimensions (WxHxD)		mm	770 x 1,000 x 545			1,100 x 1,000 x 545
Operating Temp. Range	Cooling		°C	10.0 ~ 45.0			
	Heating			10.0 ~ 45.0			

For combinations up to 60HP, please contact your local Samsung dealer. These products contain fluorinated greenhouse gas (R410A).

Specifications may be subject to change without prior notice for product improvement.
1) Nominal cooling capacities are based on; Indoor temperature : 27°C DB, 19°C WB/Inlet water temperature : 30°C/Equivalent refrigerant piping : 7.5m, Level differences : 0m
2) Nominal heating capacities are based on; Indoor temperature : 20°C DB, 15°C WB/Inlet water temperature : 20°C/Equivalent refrigerant piping : 7.5m, Level differences : 0m
3) Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.

Long Pipe Length

DVM S Water can be installed almost anywhere, regardless of its location or distance from the building. It has outdoor and indoor units, while still ensuring complete reliability. It can reach a maximum piping length of up to 170 metres between the outdoor and indoor units, and a vertical height difference of 50m, which is equivalent to 10 stories.




Saving Installation Space


DVM S Water is much more economical to install as it has a small footprint and lightweight design, but a large 20 horsepower (HP) capacity. So instead of installing two 10HP units, you only need one 20HP Samsung unit – using 30% less space and significantly reducing the costs of valves, fittings and gauges. You can also combine up to three units to create a total capacity of 60HP.



High Efficient Plate Heat Exchanger

Applying high efficient plate heat exchanger improves energy efficiency and ensures stable cooling and heating performance.





Optimal Water Flow Controller


DVM S Water's built-in Water Flow Controller helps control the amount of water used to cool and heat the outdoor unit. It determines the optimum flow of water based on the internal temperature of the spaces, so the circulation pump's energy consumption is optimised and costs reduced. And because it's provided as standard, there's no need to buy a separate water flow control kit.



DVM S Water


Dimensional Drawings | AM080/100/120FXWANR

Units: mm

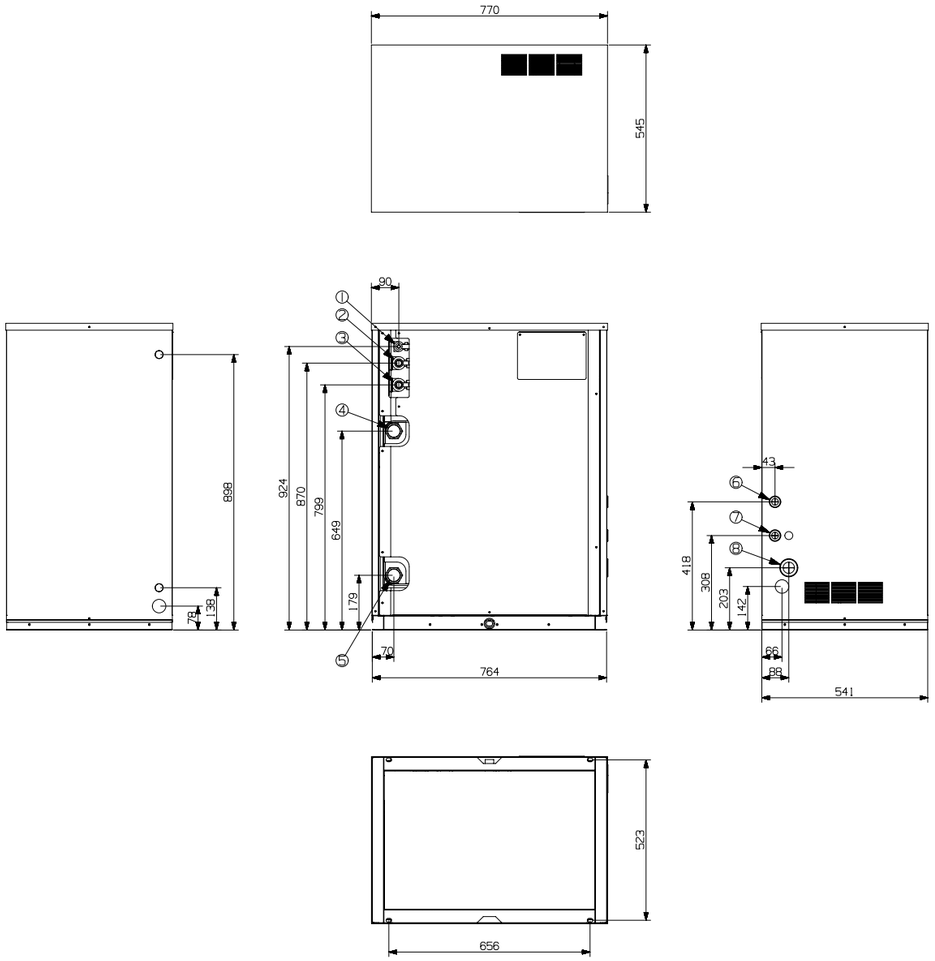

Module or Continuous Installation

Model Name of Outdoor Unit	A	B	C
AM080/100/120FXWA	770	545	600
AM200FXWA	1100		

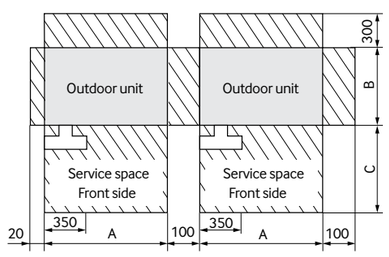


<Top view>

AM200FXWANR


Units: mm

No.	Name	Description
1	Liquid ref. pipe	15.88 (5/8")
2	High pressure gas ref. pipe	28.58 (1 1/8")
3	Low pressure gas ref. pipe	28.58 (1 1/8")
4	Water outlet pipe	PT 1-1/4
5	Water inlet pipe	PT 1-1/4
6	External contact wiring	-
7	Communication wiring	-
8	Power wiring	-

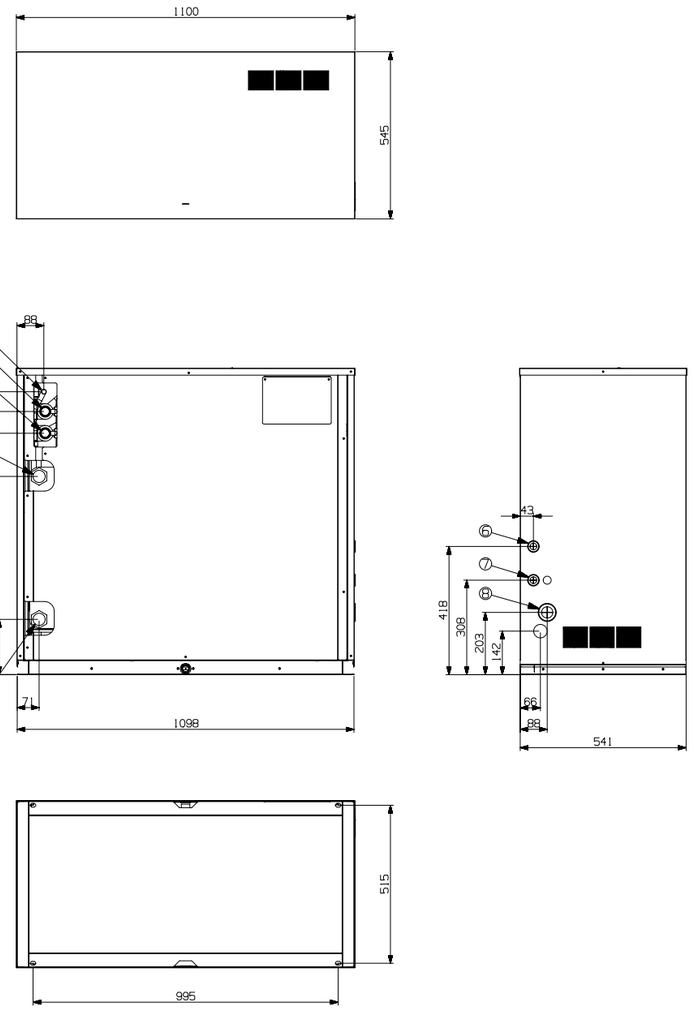

Module or Continuous Installation

Model Name of Outdoor Unit	A	B	C
AM080/100/120FXWA	770	545	600
AM200FXWA	1100		

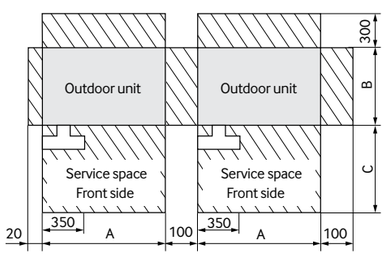

<Top view>

DVM S Eco Specifications




Model Name				AM040FXMDEH	AM050FXMDEH	AM060FXMDEH		AM040FXMDGH	AM050FXMDGH	AM060FXMDGH	AM080FXMDGH
Power Supply			Φ, ⌗, V, Hz	1,2,220-240,50				3,4,380-415,50			
Mode			-	HEAT PUMP				HEAT PUMP			
Performance	HP		HP	4.00	5.00	6.00		4.00	5.00	6.00	8.00
	Capacity (Nominal)	Cooling	kW	12.10	14.00	15.50		12.10	14.00	15.50	22.40
		Heating		13.50	16.00	18.00		13.50	16.00	18.00	25.00
	SEER			6.85	6.24	5.75		6.85	6.24	5.75	tba
	EER			4.18	3.80	3.60		4.18	3.80	3.60	3.92
	COP			4.46	4.43	4.10		4.46	4.43	4.10	5.12
Power	Power Input (Nominal)	Cooling [1]	kW	2.89	3.69	4.31		2.89	3.68	4.31	5.72
		Heating [2]		3.02	3.60	4.40		3.02	3.61	4.39	4.88
	Max. Current		A	22.00 (MCA)	24.00 (MCA)	32.00 (MCA)		10.00 (MCA)	12.00 (MCA)		18.00 (MCA)
	Fuse Rating			32		40		16			25
COP	Nominal Cooling		-	4.19	3.79	3.60		4.19	3.80	3.60	3.92
	Nominal Heating		-	4.47	4.44	4.09		4.47	4.43	4.10	5.12
Fan	Air Flow Rate		CMM	110	100			110	100		135
			l/s	1,833	1,666			1,833	1,666		2,250
Piping Connections	Liquid Pipe		Φ, mm	-9.52				9.52			
			Φ, inch	3/8"				3/8"			
	Gas Pipe		Φ, mm	15.88		19.05		15.88		19.05	
			Φ, inch	5/8"		3/4"		5/8"		3/4"	
	Installation Limitation	Max. Length	m	150(175)				150(175)			100(100)
		Max. Height		50.0(40.0)				50.0(40.0)			30.0(30.0)
Refrigerant	Type		-	R410A				R410A			
	Factory Charging		kg	3.20		3.30		3.20		3.30	3.70
Sound [3]	Sound Pressure		dB(A)	50.0	51.0	53.0		50.0	51.0	53.0	56.0
	Sound Power			66.0	67.0	69.0		66.0	67.0	69.0	74.0
External Dimension	Net Weight		kg	100.0		103.0		100.0		103.0	135.0
	Net Dimensions (WxHxD)		mm	940 x 1,210 x 330				940 x 1,210 x 330			940 x 1,420 x 330
Operating Temp. Range	Cooling		°C	-5.0 ~ 48.0				-5.0 ~ 48.0			
	Heating			-20.0 ~ 26.0				-20.0 ~ 26.0			-20.0 ~ 24.0

These products contain fluorinated greenhouse gas (R410A).

Specifications may be subject to change without prior notice for product improvement.
1) Nominal cooling capacities are based on; Indoor temperature : 27°C DB, 19°C WB/Inlet water temperature : 30°C/Equivalent refrigerant piping : 7.5m, Level differences : 0m
2) Nominal heating capacities are based on; Indoor temperature : 20°C DB, 15°C WB/Inlet water temperature : 20°C/Equivalent refrigerant piping : 7.5m, Level differences : 0m
3) Sound level was acquired in an anechoic room. Thus actual noise level may be different depending on the installation conditions.


Conventional DVM S Eco

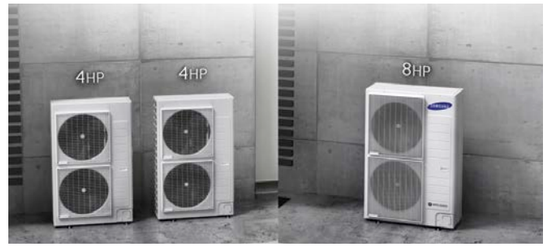

Small in Size and Weight. Big on Choice and Efficiency.

The DVM S Eco air conditioning system is a compact and efficient outdoor unit that's suitable for a wide range of homes and small businesses. It's available in a wide choice of capacities and also features a compact and lightweight design, making it very easy and economical to install and use. And it's also extremely quiet, so whatever your needs, you can enjoy optimum efficiency and comfort anywhere.


Units: mm

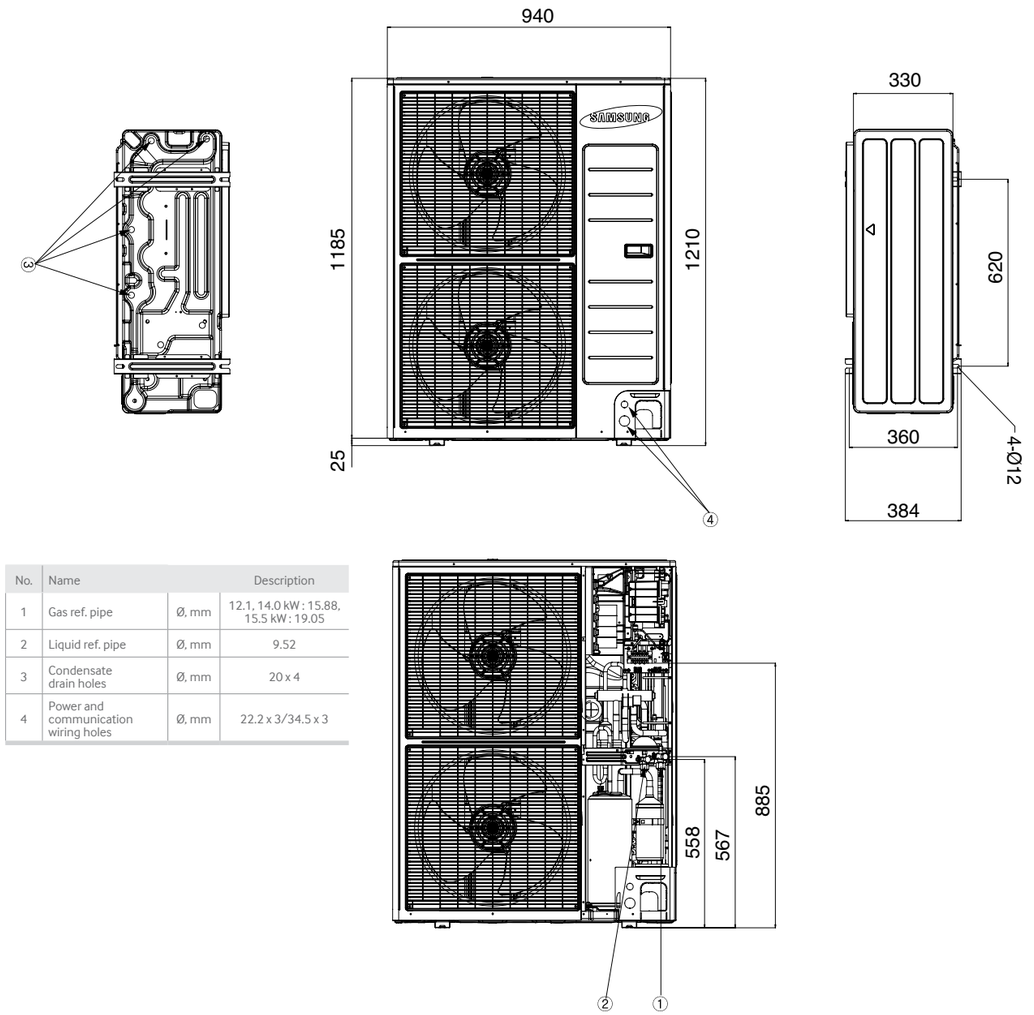


No.	Name		Description
1	Gas ref. pipe	Ø, mm	12.1, 14.0 kW : 15.88, 15.5 kW : 19.05
2	Liquid ref. pipe	Ø, mm	9.52
3	Condensate drain holes	Ø, mm	20 x 4
4	Power and communication wiring holes	Ø, mm	22.2 x 3/34.5 x 3

When installing 1 outdoor unit


When the air outlet is opposite the wall




When the air outlet is toward the wall



When 3 sides of the outdoor unit are blocked by the wall




The upper part of the outdoor unit is blocked and the air outlet is toward the wall



AM080FXMDGH

Units: mm

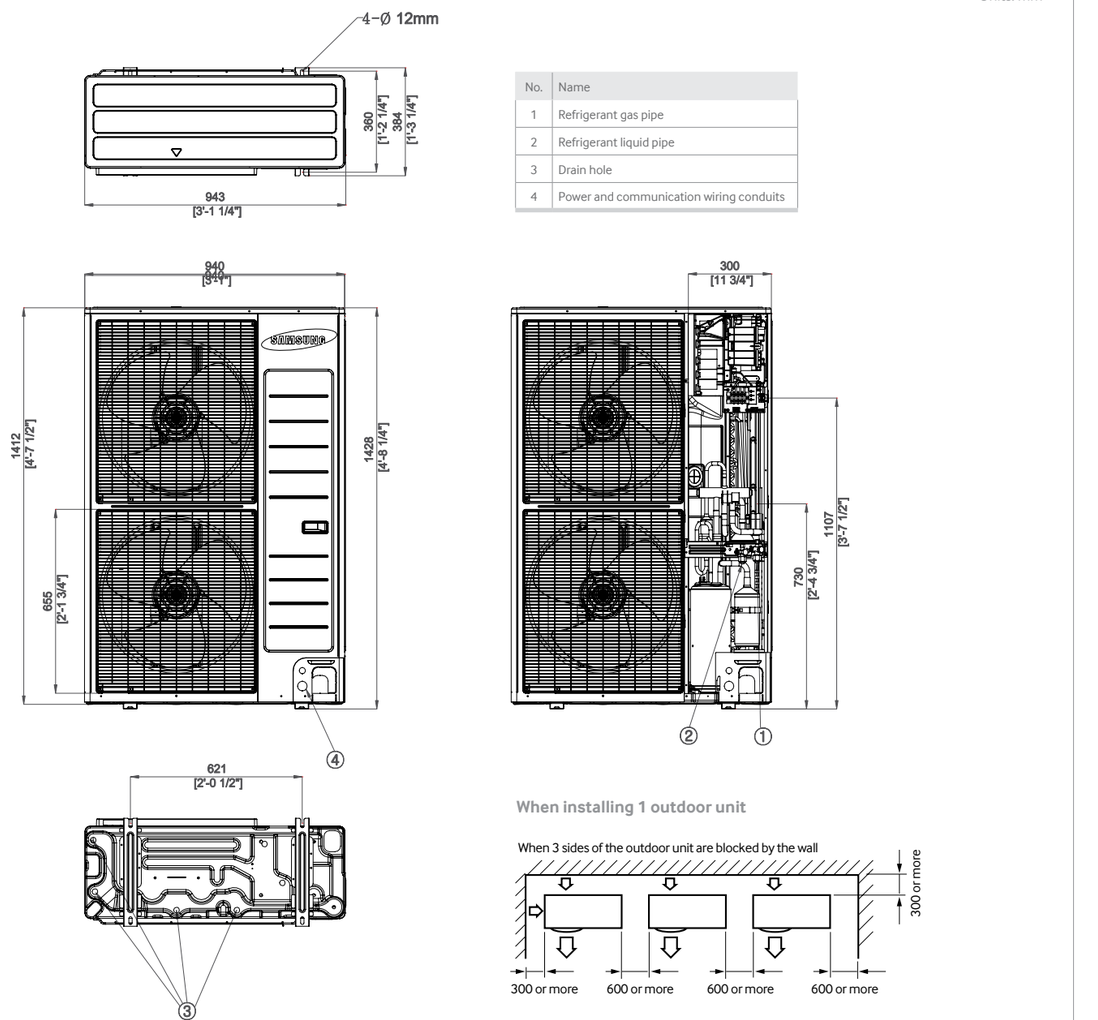


No.	Name
1	Refrigerant gas pipe
2	Refrigerant liquid pipe
3	Drain hole
4	Power and communication wiring conduits


When installing 1 outdoor unit

When 3 sides of the outdoor unit are blocked by the wall

When the walls are blocking front and the rear of the outdoor units

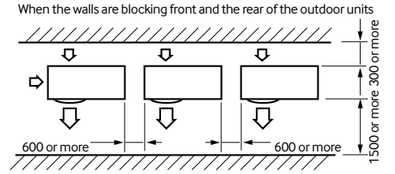


When front and rear side of the outdoor unit is toward the wall

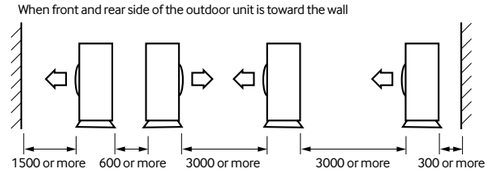


Piping Diagram DVM S Heat Recovery

Heat Recovery DVM S systems utilise MCU boxes to facilitate the connection of the 3-pipe outdoor units to the liquid and gas connection on each indoor unit. The piping restrictions as shown below must be used in conjunction with the correct pipe sizing table as detailed in the installation manual. Alternatively, use the DVM Pro design programme to produce a project-specific piping schematic.

Multiple outdoor units and MCU boxes are connected via branch pipe kits (installed horizontally) to facilitate the connection of the 3-pipe outdoor units to the liquid and gas connection on each indoor unit. The piping restrictions as shown below must be used in conjunction with the correct pipe sizing table as detailed in the installation manual. Alternatively, use the DVM Pro design programme to produce a project-specific piping schematic.

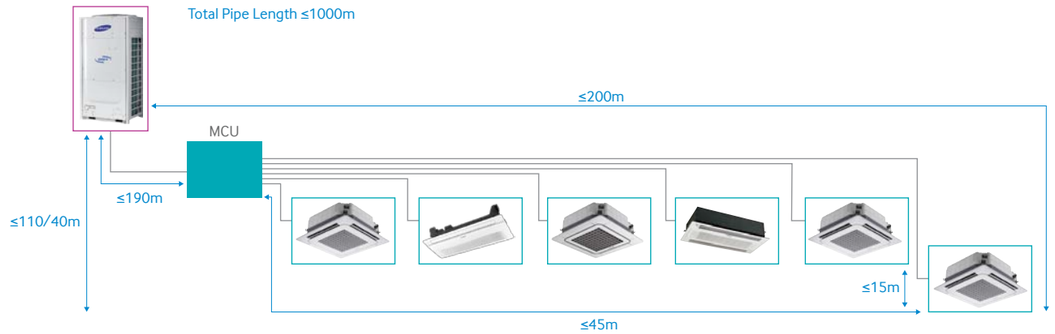

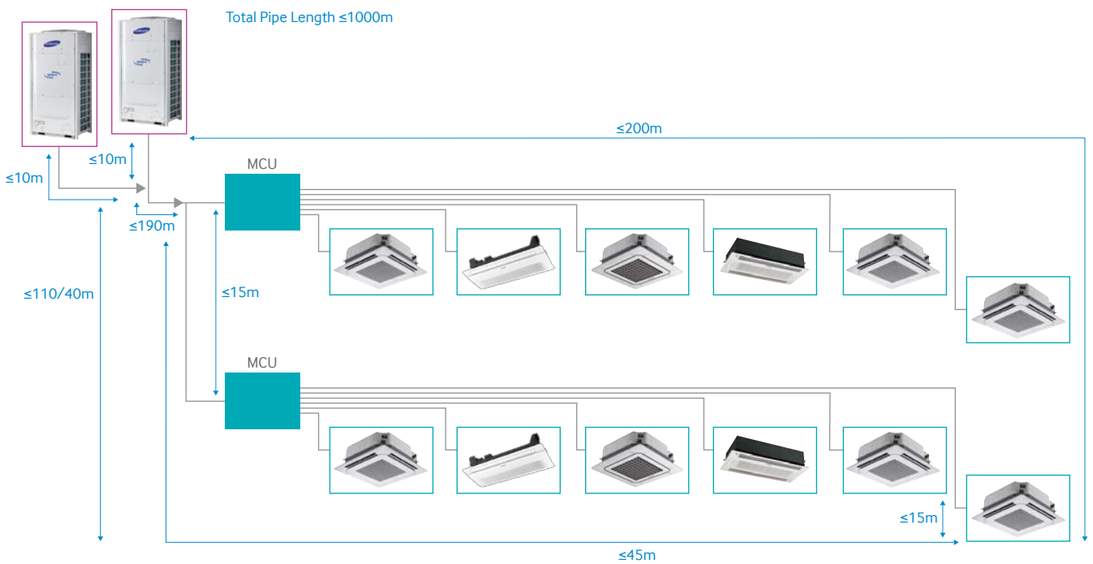



Note: To allow for increased pipe lengths from first branch, the pipes must be increased by one size.
Height differences between outdoor and indoor over 50m must utilise a PDM kit.
Please contact your local Samsung dealer for more details.

Piping Diagrams DVM S Eco | DVM S Heat Pump

The 2-pipe Heat Pump DVM S systems utilise branch pipe kits (installed horizontally) to connect outdoor unit to the liquid and gas connection on each indoor unit. The piping restrictions as shown below must be used in conjunction with the correct pipe sizing table as detailed in the installation manual. Alternatively, use the DVM Pro design programme to produce a project-specific piping schematic.

Multiple outdoor units are connected via branch pipe manifold kits. The piping restrictions as shown below must be used in conjunction with the correct pipe sizing table as detailed in the installation manual. Alternatively, use the DVM Pro design programme to produce a project-specific piping schematic.

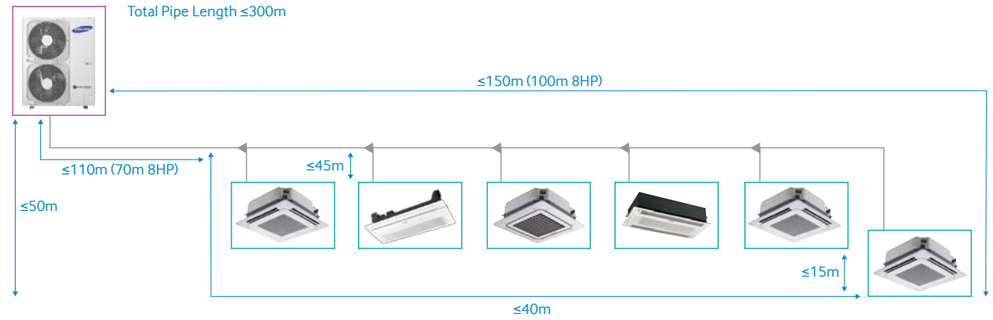

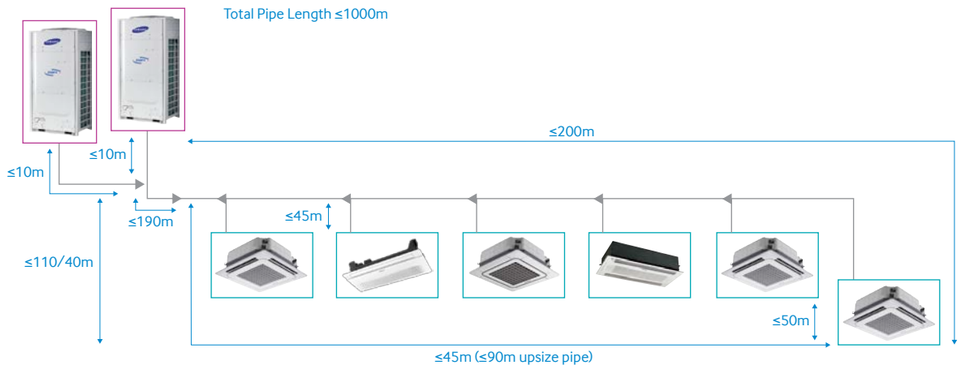


Note: To allow for increased pipe lengths from first branch, the pipes must be increased by one size.
Height differences between outdoor and indoor over 50m must utilise a PDM kit.
Please contact your local Samsung dealer for more details,

Piping Diagram

DVM S Water Heat Pump | Heat Recovery

DVM S Water system is manufactured as a combined Heat Pump/Heat Recovery system. The HR systems utilise MCU boxes to facilitate the connection of the 3-pipes to the liquid and gas connection on each indoor unit.

2-pipe Water Heat Pump DVM S systems utilise branch pipe kits (installed horizontally) to connect the outdoor unit to the liquid and gas connection on each indoor unit. The piping restrictions as shown below must be used in conjunction with the correct pipe sizing table as detailed in the installation manual. Alternatively, use the DVM Pro design programme to produce a project-specific piping schematic.

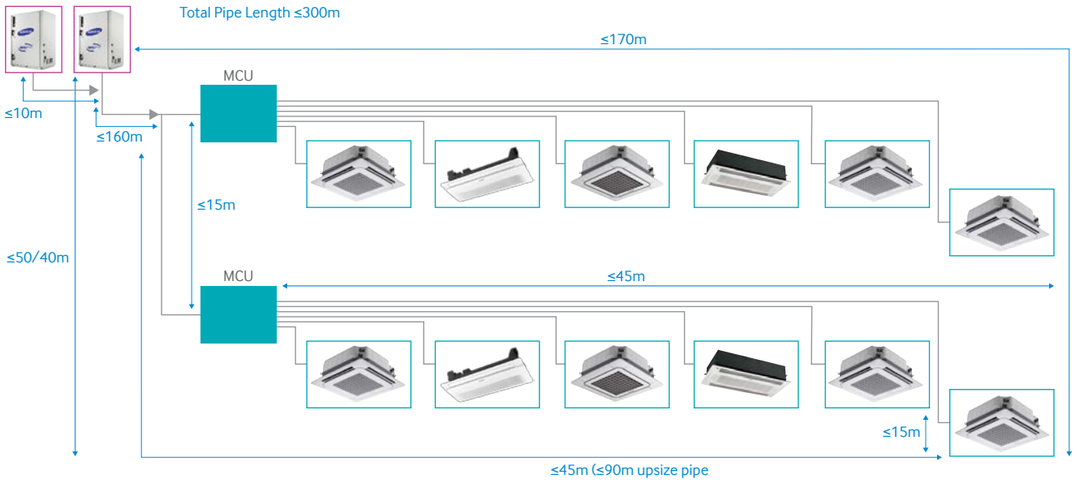

Note: To allow for increased pipe lengths from first branch, the pipes must be increased by one size.


Wiring Diagram

DVM S Eco | DVM S Water | DVM S Heat Pump | DVM S Heat Recovery

The wiring for all DVM S systems follow the same configuration of separate fused power supplies for outdoor and indoor units, which are connected via a non-polar 2-core communication wire.

Individual controllers are wired directly to the indoor units and high level central controls are connected directly to the outdoor unit (the touch controller can be connected to either).

All wiring must be installed as detailed in the installation manual. Alternatively, use the DVM Pro design programme to produce a project-specific wiring schematic.

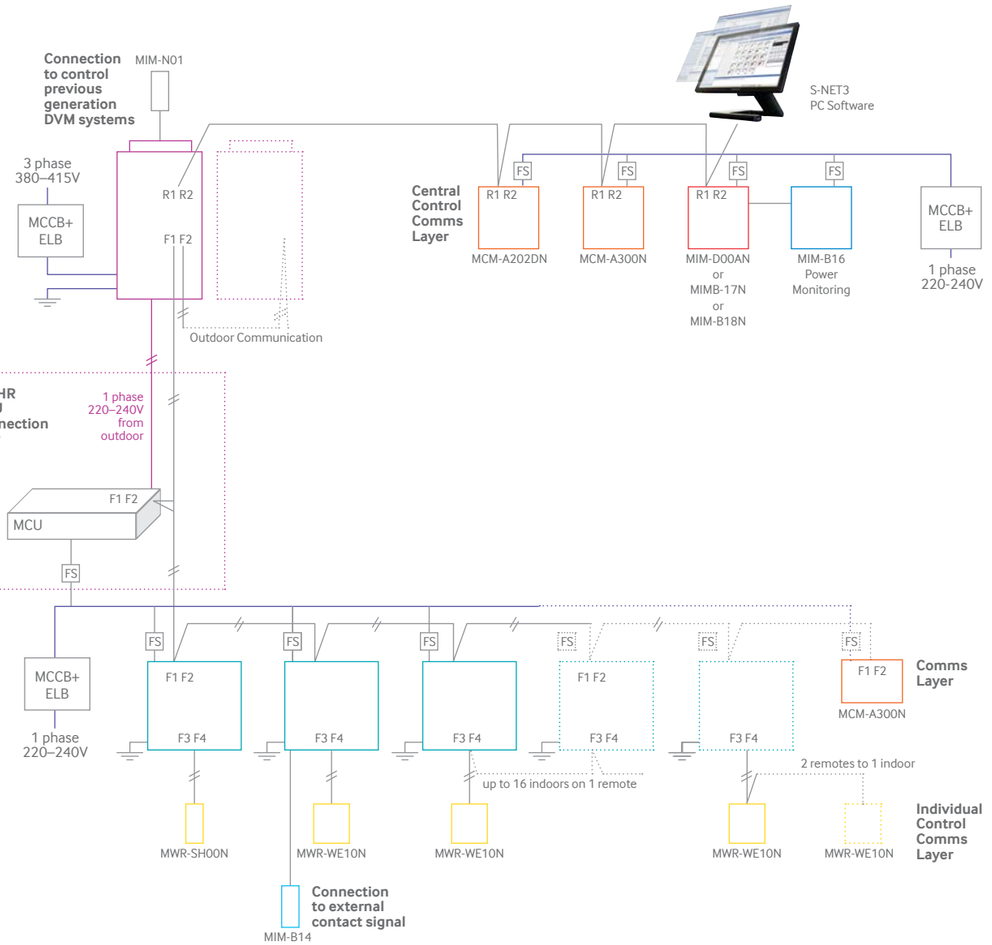

Note: All power supplies, fuses, breakers and communication wiring must be selected and installed using local regulations and specifications. Always check the power wires are properly connected prior to switching on to avoid damage to electrical components.

Controls Line-up

Classification	Model Code	Image	Description	Application
Individual Control	MR-DH00		Wireless Remote Controller	Heat pump wireless controller for use on all units with infrared receivers
	MWR-WE10N		Wired Remote Controller	Full function wired controller for use with all indoor units, ERV and AHU
	MWR-SH10N			Touch screen, simplified wired controller for use in hotel applications
	MWR-SH00N			Simplified wired controller for use in hotel applications
	MRK-A10N		Wireless Signal Receiver	Ducted unit wireless receiver unit
	MIM-H03N		Wi-Fi Controller	Wi-Fi module to control units from afar using mobile device
	MRW-TA		External Remote Temp. Sensor	External room sensor with 12m lead
Centralised Control	MCM-A300N		Centralised Controller	Touch-screen central controller – full function up to 64 indoor units
Building Management	MIM-D00AN		DMS 2	Programmable Mini BMS – 256 indoor units, full control, inputs/outputs
	MST-P3P		S-NET 3	PC web server to control and monitor up to 4,096 units via DMS2 modules
	MIM-B18		Lonworks G/W	DMS2 with built-in Lonworks BMS gateway
	MIM-B17		BACnet G/W	DMS2 with built-in BACnet BMS gateway
Power Monitoring	MIM-B16N		Electricity Meter Power Monitoring	Power monitoring module for DMS2 – up to 8 Watt/hr meters
	MCM-C210N			To allow individual VRF unit power interruption without error, i.e., hotel bedrooms, apartments
External Contact Interface	MIM-B14		External Contact Interface	On/Off operation control and Run/Fault indication interface
Converter	MIM-N01 and MIM-N10		NASA Converter	Interface previous generation RS485 communication protocol with current NASA protocol
	MIM-C02N		S-Net Converter	Diagnostic software interface

Individual Control

Wireless Remote Controller | MR-DH00

- On/Off, Operation Mode, Fan Speed, Airflow, Temperature Setting
- Simple schedule control
- Individual blade control for 4way cassette models
- Multi-channel wireless remote control (maximum 4 channels)



Wired Remote Controller | MWR-WE10N

- On/Off, Operation Mode, Fan Speed, Airflow, Temperature Setting
- Individual and group control (maximum 16 indoor units)
- Error display
- Built-in Room Temperature sensor
- Automatic stop mode
- Wireless remote control restriction
- Unified controller (AC, ERV, AHU)
- Different permission levels
- Weekly schedule setting (A/C, ERV, A/C+ERV)
- Exception date setting
- Individual blade control for 4way cassette models
- MWR-WW00N (for DVM S Hydro)



Simplified Wired Remote Controller | MWR-SH00N/ MWR-SH10N

- On/Off, Operation Mode, Fan Speed, Airflow, Temperature Setting
- Individual and group control (maximum 16 indoor units)
- Error display
- Mode selection protection
- Touch screen control (MWR-SH10N)



Wi-Fi Control Module | MIM-H03N

- Control via mobile app (available to download)
- On/Off, Operation Mode, Fan Speed, Airflow, Temperature Setting
- 7-Day schedule setting
- Energy monitoring



Wireless Signal Receiver | MRK-A10N

- On/Off control
- Operation indication
- Error indication
- Filter replacement sign
- Use with receiver wire, MRW-10A



External Room Sensor | MRW-TA

- External sensor to sense exact user environment temperature
- Wire length: 12m



Centralised Control

Touch Centralised Controller | MCM-A300N

- 7-inch Colour Capacitive Touch Screen
- Easy and Intuitive UI
- Individual/Zone control, Scheduling, Energy saving control
- Emergency operation control by external contact
- Control up to 128 indoor units
- DS card for programming and data download



Easy and Intuitive UI

- Various icons based on equipment and operation condition
- Smart phone style user-friendly control
- Individual/group management



Control and Monitoring

- Easy to check each device's status using colour and icon
- Large-size icons for ease of use
- High and low temperature limitation settings
- Individual unit restriction settings



Zone Management for multiple units

- Manage up to 12 zones
- Simply control zones with one button
- Set unique zone description icons to easily recognise each zone
- Easily bind multiple indoor units to create a zone



Schedule Control

- Set up to 10 operation schedules
- Apply these schedules to any unit or zone
- Create operation events for each schedule, including: temperature setting, mode and fan speed



Building Management | Server


DMS 2 (Data Management Server) | MIM-D00AN

The improved Data Management Server has become smarter: it can manage a variety of different air conditioning units, and the newly upgraded functions can automatically manage the air conditioning system for you.



- Built-in web server for PC-independent management and remote access control
- Multiple upper-level control access (S-NET 3, S-NET Mini, Web-client)
- Central management of up to 256 indoor units including ERV and AHU
- User-editable control logic
- Accessible level management
- Dynamic security management
- Operation and error history management
- Weekly/Daily schedule control
- Power distribution function
- Current time management even during power failure (for 24 hours)
- Data storage in non-volatile memory and SD memory
- Emergency stop function with simple contact interface
- 8 External inputs and 6 outputs provide control and monitoring for third-party devices


Enhanced Graphical display

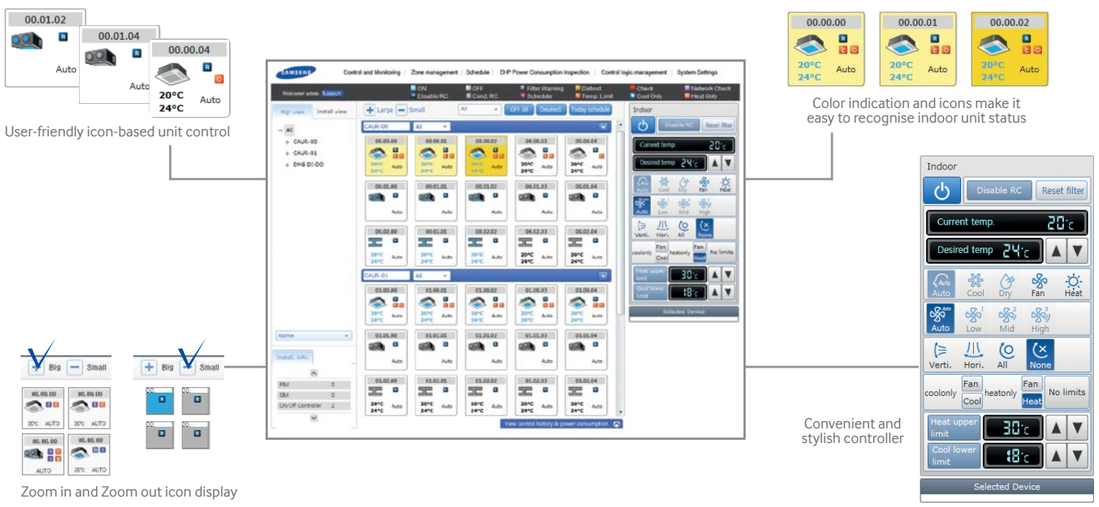

DMS 2 Mini-BMS

Programmable Control Logic

- The user can control the air conditioning, ERV, AHU and digital outputs using an arithmetic equation and conditional operators/parameters from the equipment operating conditions including volt-free inputs from external equipment
- Control logic can utilise the 8 external inputs and 6 outputs, permitting interaction between air conditioning and third-party devices.
- Using this powerful functionality, energy can be efficiently used and reduced for various operation conditions

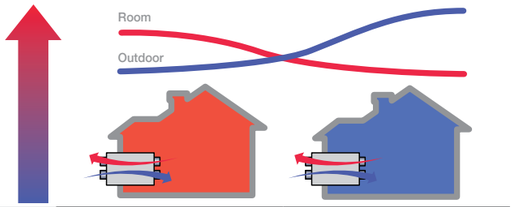

Logic	Outdoor temp < Room temp	Room temp < Outdoor temp
Control	Turn ON ERV (Cool air Intake UP)	Turn ON Air Conditioner



Outdoor temp < 10	Outdoor temp > 25
Heating mode	Cooling mode

EHP/ERV/AHU Parameters
Temperature, Power, Mode...

AND
OR


Arithmetic Equation Function
<, >, =, =>, =<, Average

EHP/ERV/AHU Parameters change
Setting temperature, Power, Mode, Fan speed...

*Example: Energy saving function, operation adjustment depending on outdoor temperature.

Easy Control and Monitoring

- Control and monitoring of up to 256 indoor units via internet network
- Operation On/Off
- Operation mode, fan speed, temperature setting
- ERV, AHU support

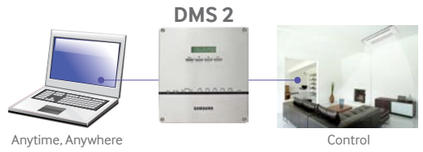

Specification		Attribute/Function
Indoor Unit Connection	(Max.)	256 Indoor Units (128 per channel)
Outdoor Unit Connection	(Max.)	80 Outdoor Units
Indoor Unit Control	-	All Indoors, ERV, AHU
Dimensions (WxHxD)	mm	240 x 255 x 65
Power	-	100–240V AC (DC adaptor)
Communication	Lower Level	RS485 (to Outdoor/PIM)
	Upper Level	Ethernet 100 Base-T (web browser)
Direct Interface	-	LCD Display (4 soft keys), LED Indicators
PIM Connection (MIM-B16)	(Max.)	8
Touch Screen Connection (MCM-A300N)	(Max.)	16
Emergency Stop	-	Pulse or Level Input
Inputs	(Max.)	8 Volt-free (Open/Short)
Outputs	(Max.)	6 Contact Signal (12V)
Programmable Logic (per condition) – Boolean logic	-	3 Logic Functions (per input)
	-	20 Output Logic Factors

Building Management | Server

DMS 2 Features

Powerful Data Backup

- DMS 2 records indoor unit operation and error occurrence history
- Recorded history makes it convenient to analyse air-conditioner operation and perform unit maintenance
- Important data is safely stored on SD memory card:
  1. Indoor/outdoor unit name
  2. Power distribution data
  3. Operation history (On/Off by DMS)
  4. DMS power On/Off history
  5. System configuration
  6. Others




Rapid and Easy Service Response

- Remote control and monitoring through the internet (if public IP is used)
- Email notification to private internet account in case of malfunction



Dynamic User Security Management

- It is possible to specify the scope of control and monitoring unit by each user
- General users, managers, and administrators can be registered separately by ID and password
- Administrators (utility managers) have the authority to set access levels for DMS 2 functions on users

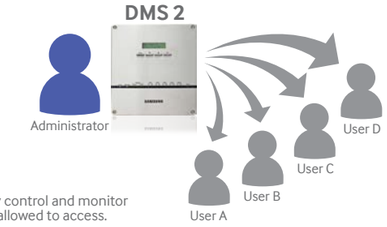

Each user can only control and monitor the units they are allowed to access.

Functions	Admin	Manager	User
	Access All	Changeable	
Control/Monitoring	O	O	O
Zone Management	O	O	X
Schedule	O	O	O
Power Distribution	O	O	X
System Configuration	O	X	X

Building Management | Power Monitoring

Power Distribution System

- Power distribution to a maximum of 256 indoor units
- Data query for watt-hour, usage time and usage ratio
- Files are saved in Microsoft Excel format
- 1-year power distribution data is saved in storage
- Current actual power consumption monitoring
- Current-type electricity meter support (CT ratio input)



Watt-hour Meter Interface Module | MIM-B16 PIM


(Pulse Input Module)

Watt-hour Meter Interface Module can be exclusively used for DMS 2 power distribution, displaying power consumption for each watt-hour meter.

- Exclusive use for DMS 2 power distribution
- Connection with up to 8 watt-hour meters
- Pulse interface with watt-hour meters
- Power consumption display for each watt-hour meter



Connection

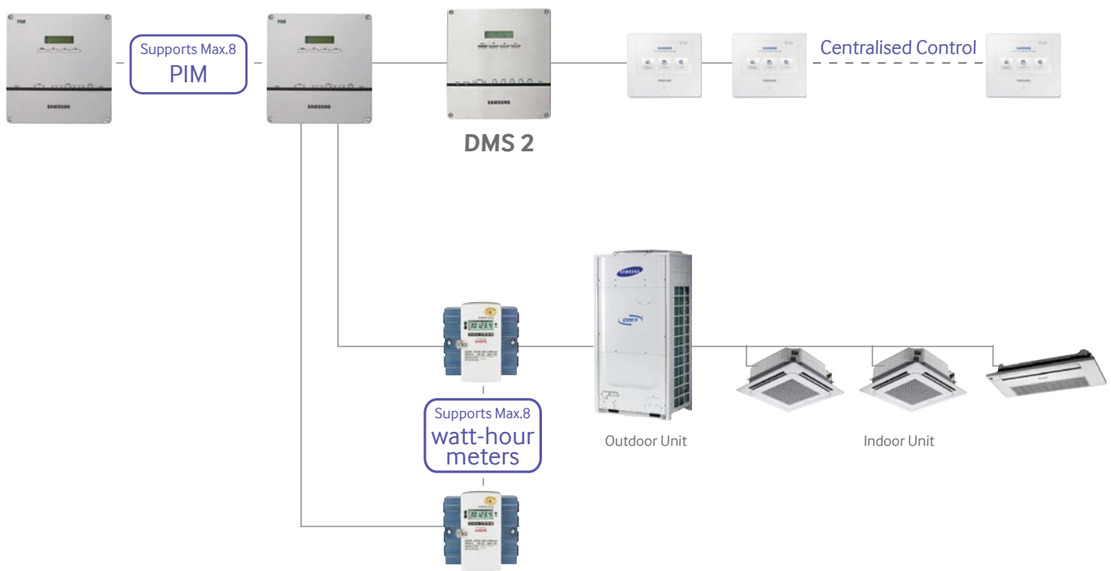

Building Management | Gateways

A DMS2 with built-in BACnet or LonWorks gateways (all the features of a DMS2, plus interface to your chosen BMS).

BACnet Gateway | MIM-B17N (DMS-Bnet)

With the BMS control and monitoring function, BACnet gateway makes it easy to control the air conditioning network in various ways. It can control up to 256 indoor units, used in combination with S-NET 3 and MCM-A300N.

- Interface for BACnet management system
- Maximum 256 indoor units plus ERVs support with a maximum of 80 interface modules
- Includes DMS 2 functions

LonWorks Gateway | MIM-B18N (DMS-Lnet)


LonWorks gateway is an interface for Lon-Connection to LonWorks management system, providing a more convenient way to manage your air conditioning system. It can control a maximum of 128 indoor units, used in combination with S-NET 3 and MCM-A300N.

- Interface for Lon-Connection to LonWorks management system
- Maximum 128 indoor units plus ERVs support with a maximum of 80 interface modules
- Includes DMS 2 functions

Features for BACnet and LonWorks Gateways

Control	• On/Off control	• Filter alarm reset
	• Operation mode	• User control restriction
	• Temperature setting	• Operation mode lock
	• Fan speed/direction	• Set temperature limit
	• ERV operation mode	• Emergency stop
	• ERV fan speed	• Output contact control
Monitoring	• On/Off control	• Thermo On/Off
	• Operation mode	• Power distribution
	• Set/Room temperature	• Operation mode lock
	• Fan speed/direction	• Set temperature limit
	• ERV operation mode	• In/Out contact state
	• ERV fan speed	• Emergency stop
	• Filter alarm	• Error code
	• User control restriction	

Connections

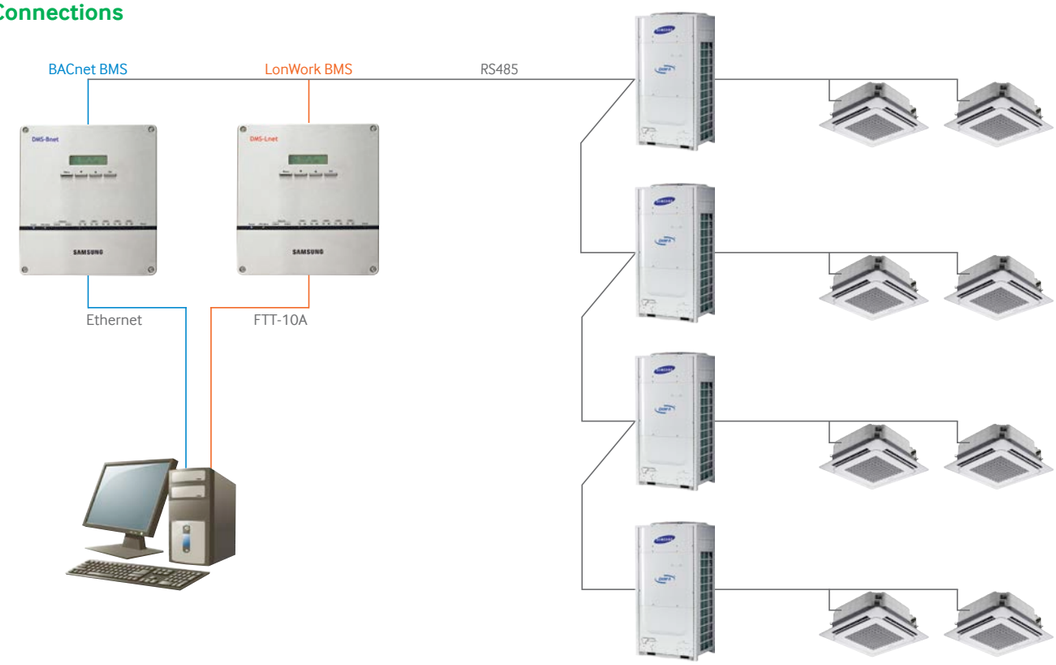

Web Server | External Contact Interface

Web Server, S-NET 3 | MST-P3P

A PC programme designed to manage an estate of air conditioning systems via DMS2 Data Management Servers.

- Fully integrated PC management software
- Up to 16 DMS 2 connection through the ethernet
- Central management of up to 4,096 indoor units including ERV and AHU
- Schedule/Zone control
- Error/Operation history management
- Power distribution management and analysis




External Contact Interface | MIM-B14

- Direct indoor unit control by external contact signal
- Window-synchronised indoor unit control
- Emergency control with simple contact input
- Indoor unit operation/error state output through relay contacts

Guestroom Management Module

Guest Room Management system saves you energy and money on cooling an unoccupied room:
The air conditioner is activated when Key-Tag is in place and turns off when Key-Tag is removed.


Example

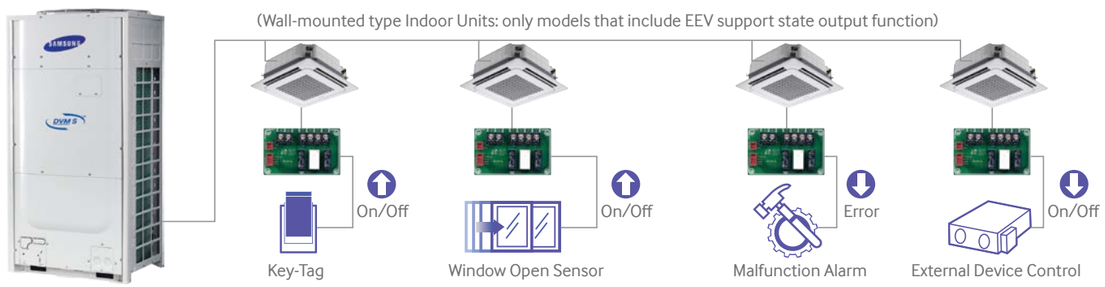



And now the perfect guide has the perfect App...

DVM Pro

New DVM-Pro is an advanced design automation tool that can be used in AutoCAD-based CAD mode or Windows-based Sales mode. This new programme helps you select system air conditioner equipment so you can easily and precisely design your air conditioning system.

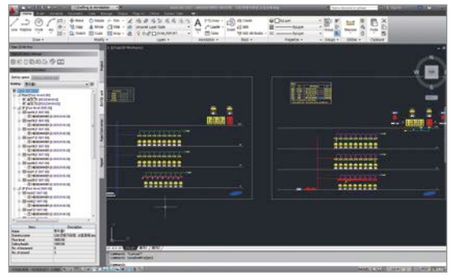

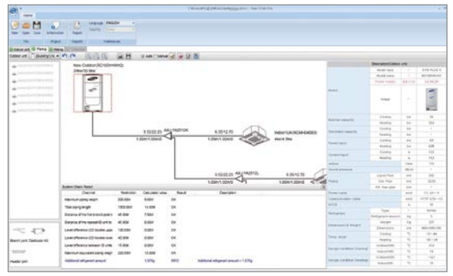

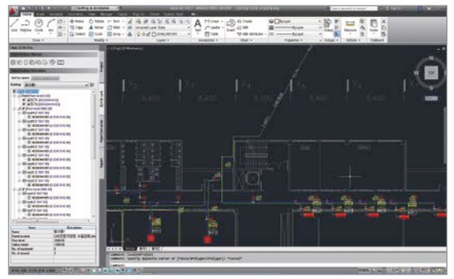



Sales Mode

- Indoor Unit and Outdoor Unit: Indoor unit and outdoor unit connection with accessory
- Piping: Basic or manual selection with system check and capacity simulation
- Wiring: Automatic diagram with communication wiring of indoor/outdoor/control units and electric power meters
- Control system: Automatic control unit selection
- Report: Specifications, diagrams with DWG and BMP format, quotation

CAD Mode

- Quick, Easy, Precise Design
- AutoCAD add-on software (not included in new DVM-Pro)
- Automatic Calculation: Refrigerant and drain pipe size
- Automatic Selection: Refnet joint, header and distributor kit
- System Check: Installation regulation and refrigerant addition
- Easy Control System Selection
- Automatic Report: Piping installation diagram, equipment list and quotation

Visit samsung/uk/dvms and download a copy from any DVM outdoor unit technical section.

SAMSUNG

SAMSUNG

www.samsung.cz / www.samsung.sk

Samsung Electronics Czech And Slovak, s.r.o.
The Park – V Parku 2323/14
148 00 Praha 4
Česká republika

Samsung Electronics Czech And Slovak, s.r.o.
organizačná zložka
BUSINESS CENTER IV
Galvaniho 17/C
82104 Bratislava
Slovenská republika